	EPS	DE	PTH	FLOW					
	FORM	MIN	MAX	GPM					
	24	15"	15 1/2"	4721					
	25	15 1/2"	16"	4991					
	26	16"	16 1/2"	5262					
	27	16 1/2"	17"	5536					
	28	17"	17 1/2"	5811					
	29	17 1/2"	18"	6088					
(0	30	18"	18 1/2"	6366					
FORMS	31	18 1/2"	19"	6645					
S.	32	19"	19 1/2"	6926					
ĭ	33	19 1/2"	20"	7208					
EPS	34	20"	20 1/2"	7491					
品	35	20 1/2"	21"	7775					
>	36	21"	21 1/2"	8060					
SHALLOW	37	21 1/2"	22"	8345					
	38	22"	22 1/2"	8632					
₹	39	22 1/2"	23"	8920					
ら	40	23"	23 1/2"	9208					
	41	23 1/2"	24"	9497					
	42	24"	24 1/2"	9787					
	43	24 1/2"	25"	10077					
	44	25"	25 1/2"	10368					
	45	25 1/2"	26"	10659					
	46	26	26 1/2"	10951					
	47	26 1/2"	27"	11244					
	48	27"	27 1/2"	11537					
	49	27 1/2"	28"	11831					
	50	28"	28 1/2"	12125					
	51	28 1/2"	29"	12419					
	52	29"	29 1/2"	12714					
	53	29 1/2"	30"	13010					
	54	30"	30 1/2"	13305					
	55	30 1/2"	31"	13601					
	56	31"	31 1/2"	13898					
	57	31 1/2"	32"	14194					
ဟ	58	32"	32 1/2"	14492					
Į≅	59	32 1/2"		14789					
FORMS	60	33"	33 1/2"	15087					
ш	61	33 1/2"	34"	15385					
PS	62	34"	34 1/2"	15683					
<u> </u>	63	34 1/2"	35"	15981					
یم ا	64	35"	35 1/2"	16280					
DEEP	65	35 1/2"	36"	16579					
	66	36"	36 1/2"	16878					
	67	36 1/2"	37"	17178					
	68	37"	37 1/2"	17477					
	69	37 1/2"	38"	17777					
	70	38"	38 1/2"	18077					
	71	38 1/2"	39"	18378					
	72	39"	39 1/2"	18678					
	73	39 1/2"	40"	18979					
	74	40"	40 1/2"	19280					
	75	40 1/2"	41"	19581					


STEEL FRAMES & EPS FORMS ARE STANDARD 8'-0" LENGTHS

3	9 40 41	9 40 41 42 43	9 40 41 42 43 44 45	9 40 41 42 43 44 45 46 47

SHALLOW EPS FORMS

50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75

DEEP EPS FORMS

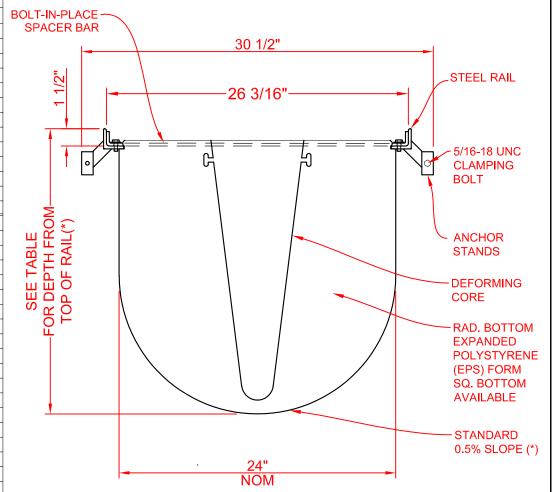

NOTES:

- 1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND INSTALLATION INSTRUCTIONS.
- 2. A TRENCH SHALL BE EXCAVATED A MINIMUM OF 12" WIDER THAN THE OVERALL WIDTH OF THE STEEL FRAME (6" MINIMUM ON EACH SIDE) AND A MINIMUM OF 6 INCHES DEEPER THAN THE OVERALL DEPTH OF THE ECONODRAIN EPS FORM.
- 3. DO NOT SCALE DRAWINGS.

Copyright © 2014 MultiDrain Systems, Inc



(*) CUSTOM SLOPES & DEPTHS AVAILABLE

1405 INDUSTRIAL DRIVE STATESVILLE, NC 28625 (704) 508-1010 1-800-433-1119 www.multidrainsystems.com

EconoDrain® Series #24 Standard Rail & Bolt-In-Place Spacer Bar

FILE NUMBER:

CSI-ED-EPS-2496NR-20a

rev: **00**

Proprietary rights of MultiDrain Systems, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred for manufacturing or for any other purpose except as specifically authorized in writing by MULTIDRAIN.

DISCLAIMER: The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from MultiDrain, and EXCEPT AS EXPRESSLY PROVIDED IN MULTIDRAIN'S STANDARD WARRANTIES, MULTIDRAIN MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of MultiDrain's standard warranties are available upon request.