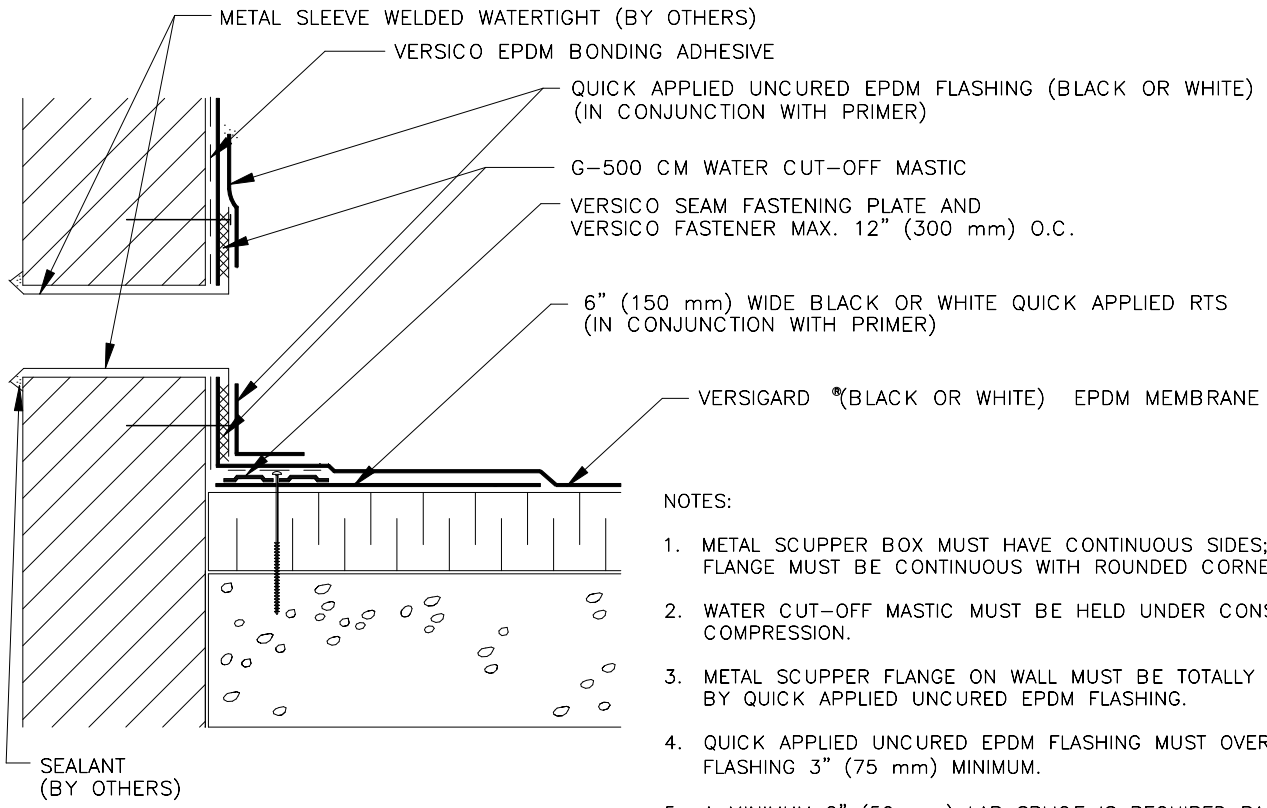

NOTES:

1. METAL SCUPPER BOX MUST HAVE CONTINUOUS SIDES; METAL FLANGE MUST BE CONTINUOUS WITH ROUNDED CORNERS.
2. WATER CUT-OFF MASTIC MUST BE HELD UNDER CONSTANT COMPRESSION.
3. METAL SCUPPER FLANGE ON WALL MUST BE TOTALLY COVERED BY QUICK APPLIED UNCURED EPDM FLASHING.
4. QUICK APPLIED UNCURED EPDM FLASHING MUST OVERLAP WALL FLASHING 3" (75 mm) MINIMUM.
5. A MINIMUM 2" (50 mm) LAP SPLICE IS REQUIRED PAST THE NAIL HEAD ON THE METAL FLANGE OF THE SCUPPER.

C-18.3

OVERFLOW METAL SCUPPER

VERSICO ROOFING SYSTEMS

© 2007 VERSICO, LLC