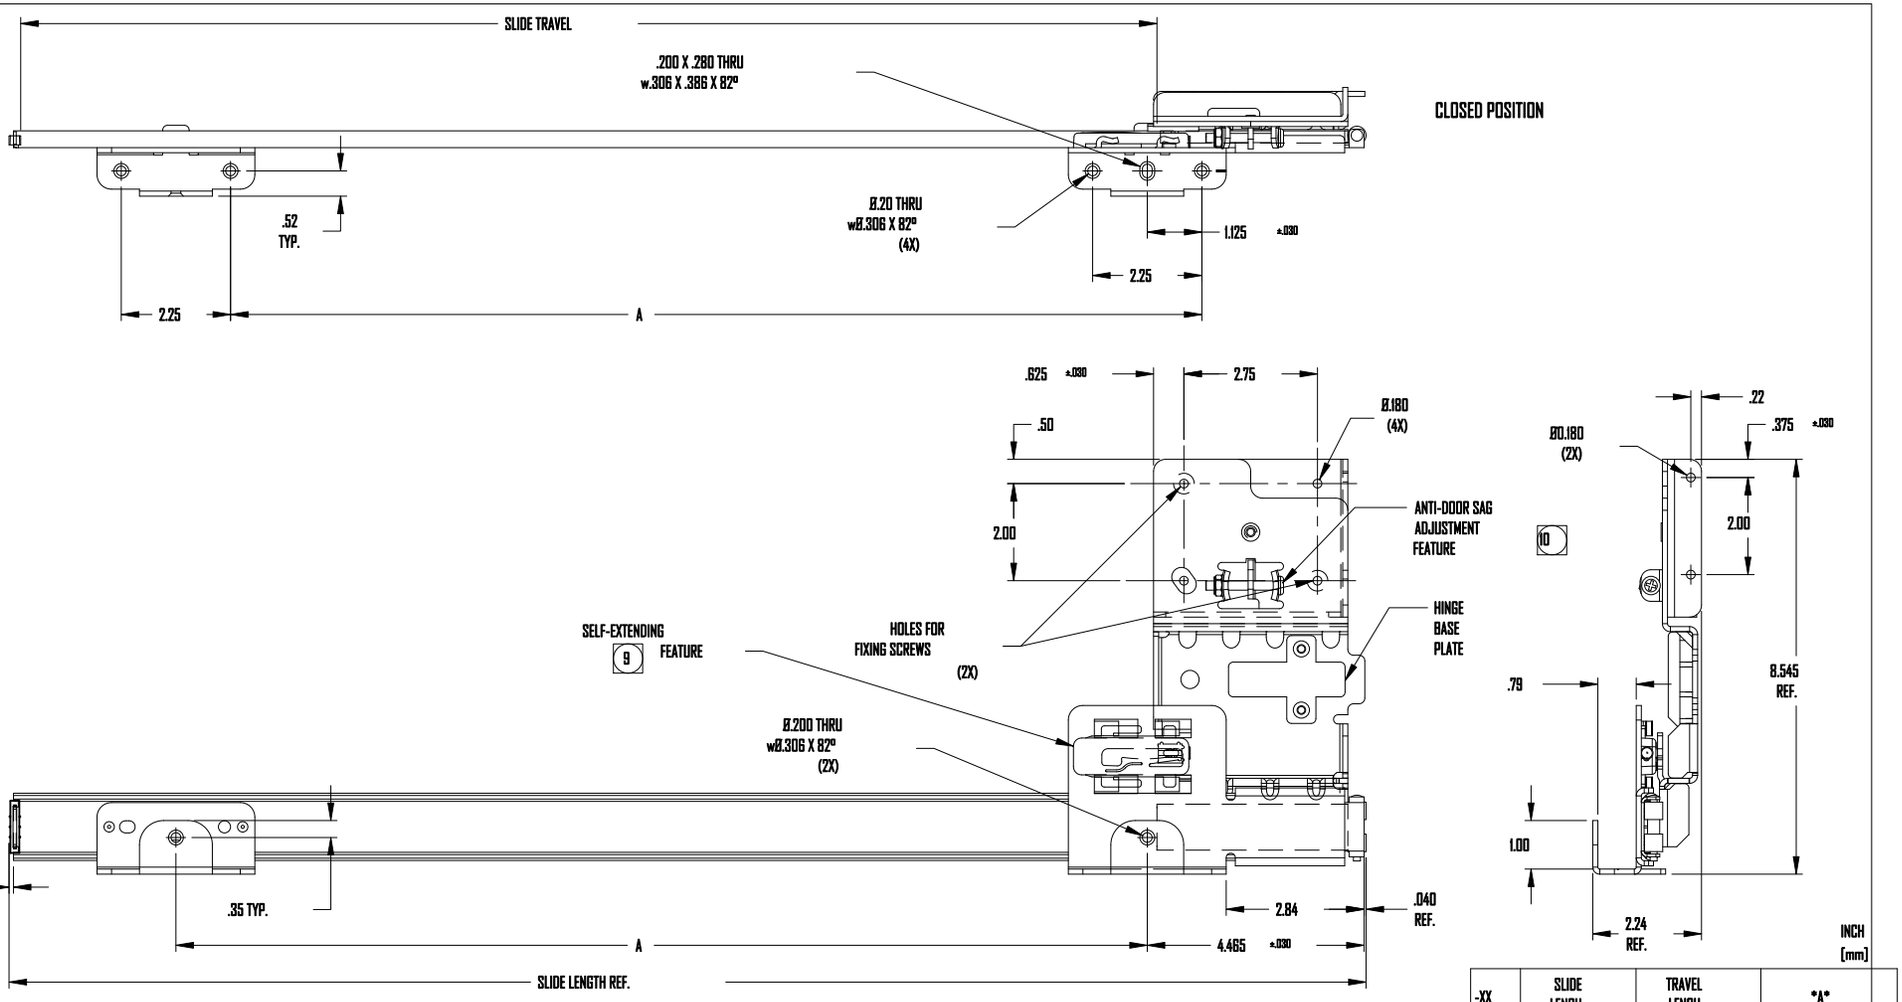

INCH
[mm]

-XX	SLIDE LENGH	TRAVEL LENGH	*A*	
-12	11.94[303]	7.40[188]	4.00[101.6]	
-14	13.94[354]	9.40[239]	6.00[152.4]	
-16	15.94[405]	11.40[290]	8.00[203.2]	
-18	17.94[456]	13.40[340]	10.00[254.0]	
-20	19.94[506]	15.40[391]	12.00[304.8]	
-22	21.94[557]	17.40[442]	14.00[355.6]	
-24	23.94[608]	19.40[493]	16.00[406.2]	
-26	25.94[659]	21.40[544]	18.00[457.2]	
-28	27.94[710]	23.40[594]	20.00[508.0]	

10. SLIDE IS PROVIDED ANTI-DOOR SAG ADJUSTMENT FEATURE. ADJUST FEATURE PRIOR TO MOUNTING FIXING SCREWS. ROTATE CLOCKWISE FOR BOTTOM SLIDE. ROTATE COUNTER CLOCKWISE FOR TOP SLIDE.
9. SLIDE IS PROVIDED WITH SELF-EXTENDING FEATURE.
8. LEFT-HAND SLIDE SHOWN, RIGHT-HAND SLIDE OPPOSITE.
7. SLIDE IS PROVIDED WITH SILENCING BUMPERS IN THE OPEN AND CLOSED POSITIONS
6. HOLES OTHER THAN THOSE SHOWN MAY BE IN THE MEMBERS AT ACCURIDE OPTION.
5. WIDTH OF SLIDE IS MEASURED IN CLOSED POSITION, ACROSS THE AREA WHERE THE SLIDE MEMBERS ARE FULLY ENGAGED WITH BALL BEARINGS.
4. FINISH: ELECTRO-ZINC PLATED, CHROMATE COATED BLACK.
3. LUBRICANT: HIGH-LOW TEMPERATURE GREASE.
2. BALL BEARINGS: CARBURIZED STEEL.
1. MATERIAL: SLIDE MEMBERS AND COMPONENT PARTS: WORK-HARDENED, COLD-ROLLED STEEL.

NOTES: UNLESS OTHERWISE SPECIFIED

SYM.	IS	DESCRIPTION	WAS	DATE	APPD.
REVISIONS					

THIS Accuride PRODUCT COVERED BY U.S. PATENTS #6205625, #6279220 AND OTHER U.S. PATENTS PENDING.

CUSTOMER: Accuride

P/N: REV.

SCALE 1"=4" | DATE | CONTROLLING DOCUMENT ☒ ACCURIDE ☐ CUSTOMER

DRAWN ES | 07/07/03

APPROVED

TOLERANCES NOT SHOWN
in mm in mm
.xxx ± .010 .25 Thread ± .13 3.3
.xx ± .030 .76 Holes ± .008 .15
Angular ± 1°

Accuride

PRO POCKET
FLIPPER DOOR SLIDE

PART NUMBER: CB1321-12/28-L/R | REV.

THIS DOCUMENT IS FURNISHED FOR THE EXPRESS AND EXCLUSIVE PURPOSE OF CONVEYING INFORMATION TO CUSTOMERS AND SUPPLIERS OF ACCURIDE INTERNATIONAL INC., AND IS NOT TO BE DISCLOSED TO COMPETITIVE SOURCES.