


A
A
ELEVATION

LEGEND:

1. ACTIVE DOOR LEAF.
2. INACTIVE DOOR LEAF.
3. NEOPRENE COMPENSATING SEAL TO EXTEND BETWEEN DOORS. FIX TO PULL SIDE FACE WITH FLAT STOCK & COUNTERSUNK SCREWS AT FACTORY. SECURE BENEATH PULL SIDE PANEL.
4. ACOUSTIC ASTRAGAL FASTENED TO THE PUSH SIDE OF THE INACTIVE DOOR LEAF.

NOTE:

ALL ASTRAGAL SEALS TO BUTT INTO FRAME SEALS AT HEAD AND EXTEND TO THE BOTTOM OF THE DOOR.

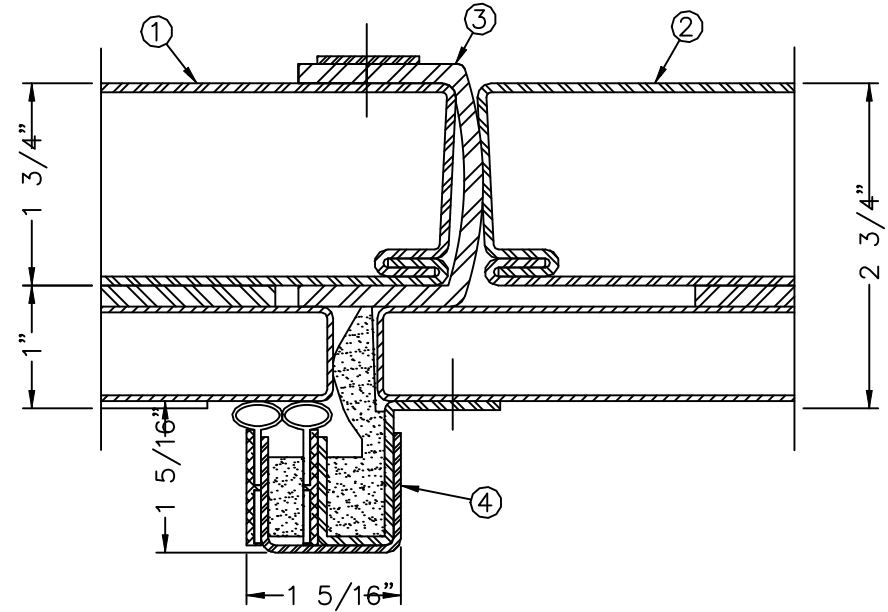

SECTION A-A