


**NOTES:**


- EXCAVATE AND SHAPE FOUNDATION SOILS TO THE GRADES, ELEVATIONS AND DIMENSIONS SHOWN ON THE CONSTRUCTION DRAWINGS.
- VERIFY THAT THE FOUNDATION SOIL SATISFIES THE DESIGN STRENGTH REQUIREMENTS. IF UNACCEPTABLE SOILS ARE ENCOUNTERED THEY SHALL BE REMOVED AND REPLACED WITH ENGINEERED FILL AS DIRECTED BY THE PROJECT ENGINEER.
- PLACE SPECIFIED GRANULAR BASE (LEVELING PAD) MATERIALS TO THE LINES AND GRADES SHOWN ON THE CONSTRUCTION DRAWINGS AND COMPACT TO A MINIMUM 95% OF STANDARD PROCTOR DRY DENSITY (SPDD). IF SPECIFIED EXPAND GEOWEB FOOTING SECTIONS INTO POSITION ON THE PREPARED SUBGRADE (OR BASE) AND TEMPORARILY ANCHOR AT THE CORNERS AND ALONG THE EDGES.
- OVERFILL GEOWEB CELLS WITH THE SPECIFIED GRANULAR INFILL MATERIAL. THE MAXIMUM PARTICLE SIZE OF THE INFILL MATERIAL SHALL NOT BE GREATER THAN 50 mm (2 in). COMPACT THE INFILL MATERIAL AND SURROUNDING FILL TO A MINIMUM 95% OF SPDD. REMOVE EXCESS FILL TO LEVEL WITH THE TOP OF THE CELLS.
- INSTALL PERFORATED SUBDRAIN PIPE, WRAPPED WITH THE SPECIFIED NONWOVEN GEOTEXTILE, OR BACKFILL WITH CLEAR STONE, WRAPPED IN A NONWOVEN GEOTEXTILE ADJACENT TO THE FOOTING OR AS SHOWN ON THE CONSTRUCTION DRAWINGS. PLACE DRAINAGE SYSTEM AT A MINIMUM GRADIENT OF 1% TO THE SPECIFIED OUTLETS. CONNECT SUBDRAIN PIPES TO SPECIFIED OUTLETS WITH T-CONNECTORS. WRAP OUTLET PIPES WHICH PASS THROUGH FOOTING OR WALL SECTIONS WITH GEOTEXTILE TO PREVENT LOSS OF CELL INFILL MATERIALS. CONNECT OUTLET PIPES TO SITE DRAINAGE SYSTEM IF PRESENT, OR ENSURE THAT OUTLETS WILL NOT CAUSE LOCALIZED EROSION. COMPACT FILL MATERIALS SURROUNDING THE DRAINAGE SYSTEM.
- WHERE SPECIFIED PLACE GEOTEXTILE OVER THE BASE AND EXTEND UP THE FACE OF THE EXCAVATION AND PIN INTO POSITION. ALLOW 300 mm (12 in) OVERLAPS AT ADJOINING SECTIONS OF GEOTEXTILE. WHERE GEOCOMPOSITE DRAINAGE MATERIALS ARE SPECIFIED, ENSURE THAT EACH STRAP AT OUTLETS WILL NOT CAUSE LOCALIZED EROSION. COMPACT FILL MATERIALS SURROUNDING THE DRAINAGE SYSTEM.
- EXPAND GEOWEB SECTIONS, DIMENSIONED ACCORDING TO THE CONSTRUCTION DRAWINGS, INTO POSITION USING STRETCHER OR FRAMES, TEMPORARILY STAKES OR DRAWING SUITABLE METHOD TO TEMPORARILY HOLD IN PLACE. INTERLEAF OR OVERLAP EDGES OF ADJACENT SECTIONS IN EACH LAYER, ACCORDING TO WHICH SIDE WALL PROFILES ABUT. ENSURE THAT ALL ADJOINING SECTIONS ARE FLUSH AT THE JOINTS AND ADJOINING CELLS ARE FULLY STAPLED.
- PLACE SPECIFIED INFILL MATERIALS TO APPROXIMATELY 50 mm (2 in) ABOVE THE WALLS. COMPACT INFILL AND BACKFILL MATERIALS TO A MINIMUM 95% OF SPDD AND REMOVE EXCESS MATERIAL ABOVE THE CELL WALLS. USE WALK-BEHIND COMPACTION EQUIPMENT TO COMPACT MATERIAL WITHIN THE GEOWEB SECTIONS AND WITHIN 1 m (3 ft) OF THE BACK OF GEOWEB SECTIONS.
- PLACED SUBSEQUENT LAYERS WITH THE SPECIFIED SET BACK AND ALIGN GEOWEB SECTIONS TO AVOID OVERHANGING OF UPPER SECTIONS OVER LOWER SECTIONS.
- WHERE DIFFERENT INFILL MATERIALS ARE SPECIFIED FOR THE OUTER CELLS (EG. TOPSOIL/VEGETATED), THE FOLLOWING PROCEDURES MAY BE USED:
  - COVER OUTER CELLS WITH REMOVABLE BOARD WHILE FILLING BACK CELLS. PLACE SPECIAL INFILL IN OUTER CELLS BEFORE ADVANCING TO THE NEXT LAYER.
  - LEAVE OUTER CELLS OPEN BUT USE EXTRA CARE TO FILL BACK CELLS AND AVOID EXCESSIVE SPILLAGE INTO OUTER CELLS. WHERE THE SPECIFIED OUTER CELL INFILL AND VEGETATION WILL TOLERATE IT, SOME SPILLAGE OF GRANULAR INFILL INTO THE OUTER CELLS IS ACCEPTABLE.

**REINFORCED WALL SYSTEMS**


- INSTALL GEOSYNTHETIC REINFORCEMENT BETWEEN GEOWEB SECTIONS AT THE SPECIFIED ELEVATIONS. PLACE THE LEADING EDGE OF THE GEOSYNTHETIC AT THE FRONT FACE OF THE GEOWEB SECTION TO BE PLACED AND EXTEND THE SPECIFIED DISTANCE (I.E. LENGTH) OVER THE COMPACTED BACKFILL. ENSURE THAT THE GEOSYNTHETIC REINFORCEMENT IS PLACED WITH THE HIGH STRENGTH DIRECTION PERPENDICULAR TO THE WALL FACE.
- PLACE AND INFILL THE NEXT GEOWEB SECTION ON TOP OF THE GEOSYNTHETIC REINFORCEMENT.
- MANUALLY TENSION THE GEOSYNTHETIC AND HOLD TAUT (TEMPORARY STAKES OR OTHER METHOD) DURING PLACEMENT OF THE SPECIFIED BACKFILL SOIL.
- PLACE BACKFILL MATERIAL WITHIN REINFORCED SOIL ZONE IN 250 mm (10 in) LIFTS AND COMPACT TO A MINIMUM 95% OF SPDD. ENSURE THAT THE GEOSYNTHETIC REINFORCEMENT REMAINS TAUT AND IS NOT DISPLACED WHILE PLACING THE BACKFILL MATERIAL. THIS IS BEST ACCOMPLISHED BY PLACING THE BACKFILL AT THE BACK OF THE GEOWEB SECTIONS AND SPREADING TOWARD THE BACK OF THE REINFORCED SOIL ZONE. SHAPE AND COMPACT THE BACKFILL LEVEL WITH THE TOP OF THE GEOWEB SECTIONS PRIOR TO PLACING THE NEXT LAYER.
- PLACE AND COMPACT RETAINED SOILS (FILL SITUATIONS) BEHIND THE REINFORCED SOIL ZONE IN 250 mm (10 in) LIFTS AND COMPACT TO A MINIMUM 95% OF SPDD.

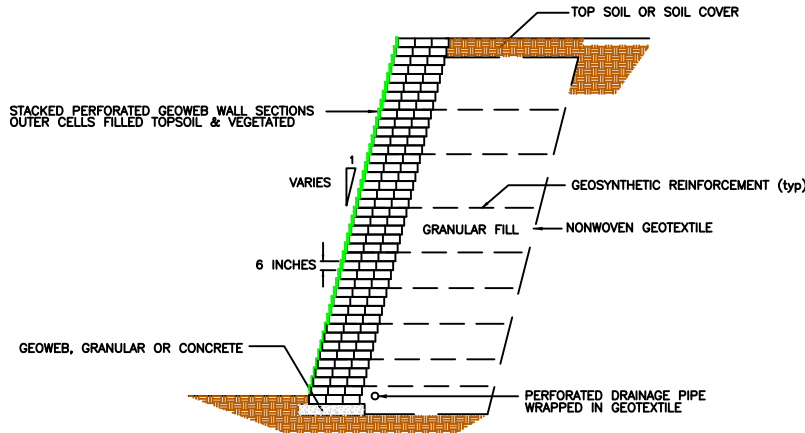


**REINFORCED GEOWEB® RETAINING WALL**

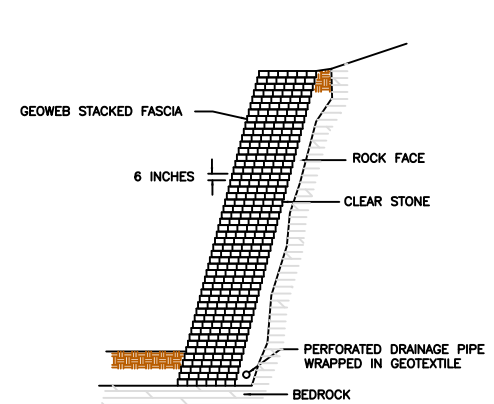

**ROCK FACE PROTECTION - STACKED GEOWEB® FASCIA**

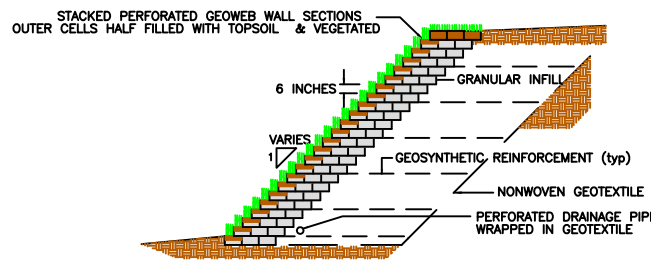

**REINFORCED SLOPE - STACKED GEOWEB® FASCIA**

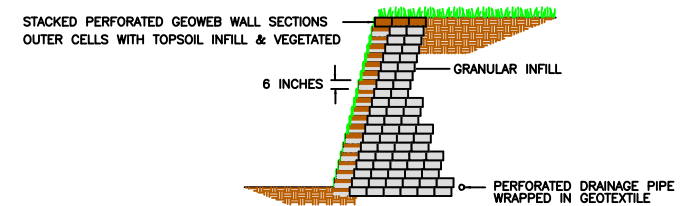

**GRAVITY WALL**

	<b>PRESTO® PRODUCTS CO.</b> 670 NORTH PERKINS STREET APPLETON, WI 54914 920-738-1342 WWW.PRESTOGEO.COM
	<p><b>GENUINE GEOWEB® WALL CROSS SECTIONS</b></p> <p>PRESTO®, GEOWEB®, AND ATRA® ARE REGISTERED TRADEMARKS OF PRESTO PRODUCTS.</p>

THIS DRAWING IS COPYRIGHTED AND BASED UPON THE USE OF GENUINE GEOWEB MANUFACTURED BY PRESTO GEOSYSTEMS. ANY USE OF THIS DRAWING FOR ANY PRODUCT OTHER THAN THAT MANUFACTURED BY PRESTO GEOSYSTEMS IS STRICTLY PROHIBITED.

DATE	NOVEMBER 2019	FILE NAME	GWRW1F.DWG
SCALE	NTS	SHEET	1
© 2019 PRESTO GEOSYSTEMS			