


FILTERPAVE™


MAXIMUM DETENTION/CLEANSING

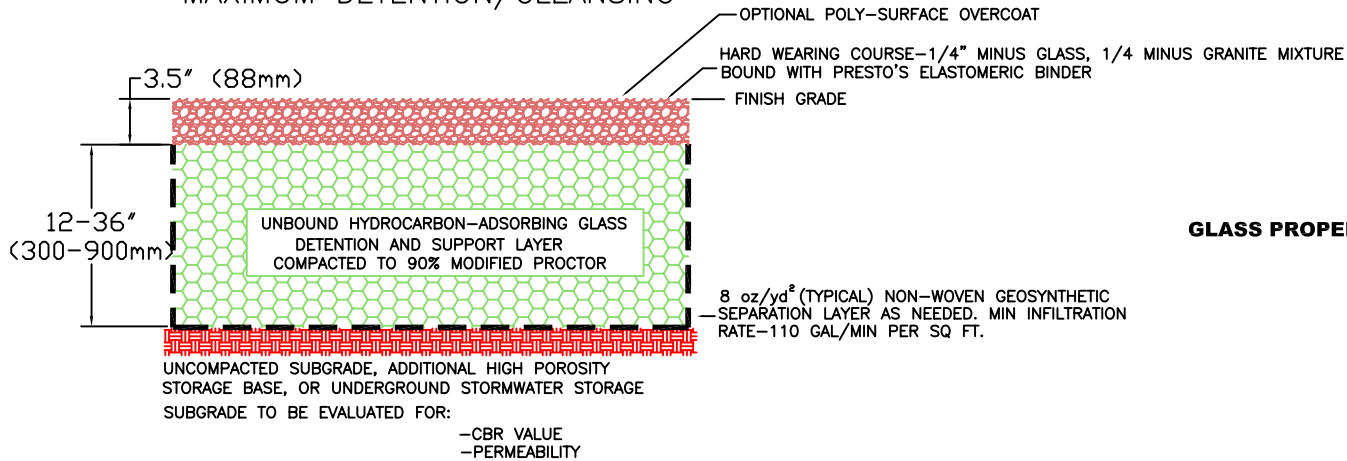

GLASS PROPERTIES- THE GLASS SHALL BE PROCESSED USING PRESTO PRODUCTS COMPANY'S PATENTED PROCEDURE FOR USE IN THE FILTERPAVE POROUS PAVEMENT SYSTEM. ONLY GLASS PURCHASED THROUGH PRESTO PRODUCTS COMPANY OR AN AUTHORIZED AGENT IS ACCEPTABLE.

BINDER PROPERTIES- THE BINDER SHALL BE A UNIQUE ELASTOMERIC BINDING MATERIAL MANUFACTURED SPECIFICALLY FOR USE IN THE FILTERPAVE POROUS PAVEMENT SYSTEM. ONLY BINDER PURCHASED THROUGH PRESTO PRODUCTS COMPANY OR AN AUTHORIZED AGENT IS ACCEPTABLE.

MINIMUM GLASS USED—STRUCTURALLY STABLE

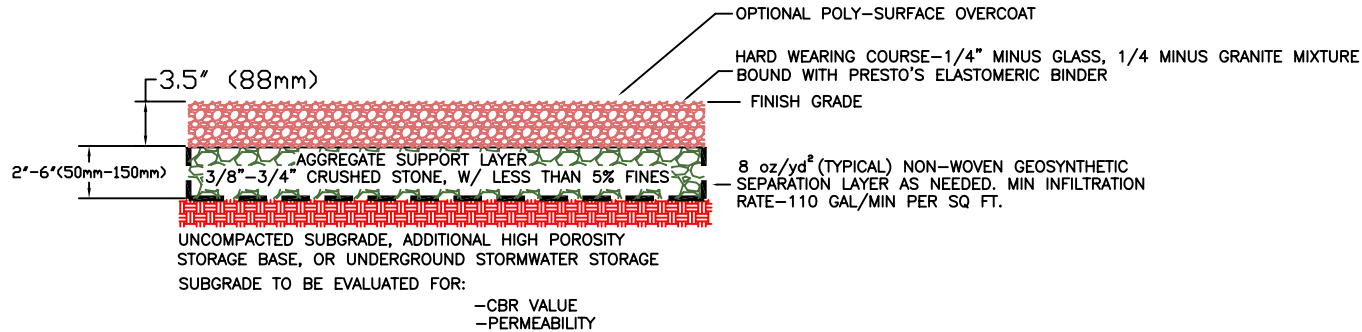

NOTE: BASE DEPTHS SHOWN ARE MINIMUMS FOR STRUCTURAL STRENGTH. POOR SUBGRADE PERMEABILITY AND/OR AREAS WITH HIGHER THAN AVERAGE RAINFALLS MAY REQUIRE MORE BASE AS A STORAGE RESERVOIR.



PRESTO GEOSYSTEMS

FILTERPAVE®
POROUS PAVEMENT SYSTEM

FILTERPAVE IS A REGISTERED TRADEMARK OF PRESTO PRODUCTS COMPANY.

DATE	FEBRUARY, 2008	FILE NAME	FILTERPAVE-A2.DWG
SCALE	NTS	SHEET	1