SECTIONAL VIEW – ORION MRL-4260 (1R)

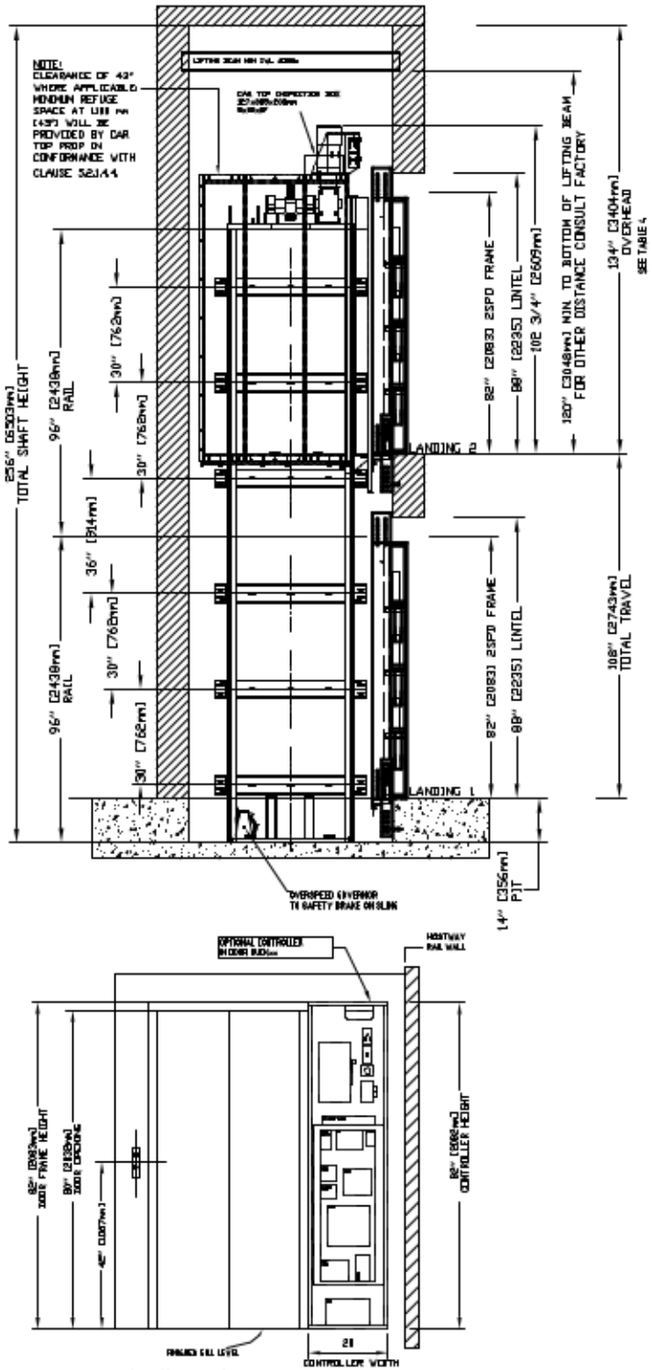

HALL FIXTURE LOCATION

PLAN VIEW – ORION MRL-4260 (1R) 2 SPEED WITTUR DOORS

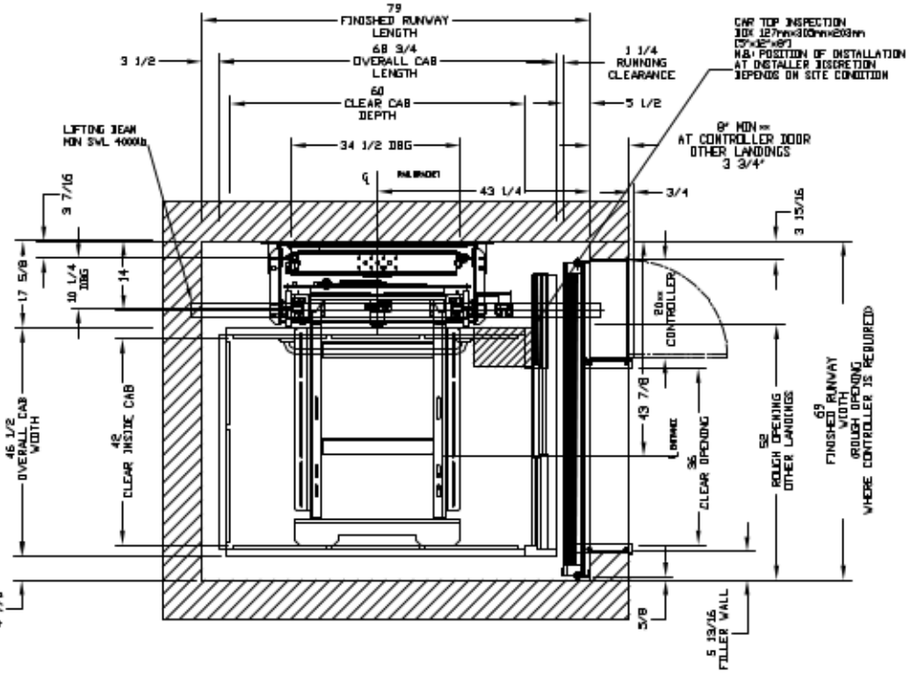





RAIL BRACKETS

TABLE 1

RAIL FORCES	
× R1	× R2
932 lbf	260 Lbf
RAIL WEIGHT:	lb/m

FOR TOTAL PULL-OUT FORCE ON RAIL BRACKET,
eg. 4 x 444 = 1776 LBF
FOR LOCAL APPLICATION OF PIT LOAD,
PIT MUST BE DOUBLED.
SEE PIT CHANNEL/BUFFER SKETCH

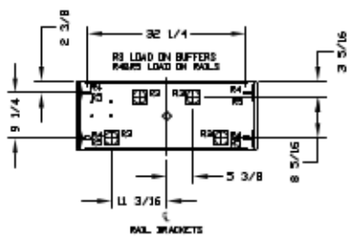

TABLE 2

PIT RE-ACTION FORCE	
R3	1000 LBS
R4	3000 LBS
R5	1500 LBS

LOADS ON PIT

NOTE A:
OPTIONAL DOOR BACK CONTROLLER (DBC) SHOWN FOR REFERENCE. WHERE DBC IS NOT USED A DEDICATED MACHINE ROOM MUST BE PROVIDED BY OTHERS.

NOTE B
WHERE SMOKE DETECTORS ARE REQUIRED, WIRING FROM A NORMALLY CLOSED CONTACT AT BOTH THE DESIGNATED RETURN LANDING SMOKE DETECTORS AND ALTERNATE RETURN LANDING SMOKE DETECTOR SHALL BE PROVIDED TO THE CONTROLLER. A NORMALLY CLOSED CONTACT REPRESENTING ALL OTHER SMOKE DETECTORS MUST BE PROVIDED TO THE CONTROLLER.

NOTE C
ALL INFORMATION IS SUBJECT TO CHANGE.
PLEASE REFERENCE OUR ON-LINE DRAWINGS AT
www.savaria.com FOR THE MOST RECENT UPDATES

PROVISIONS BY OTHERS

GENERAL

HOISTWAY – THE HOISTWAY MUST BE IN ACCORDANCE WITH "SAFETY CODE FOR ELEVATORS AND ESCALATORS" (ASME A17.1) AND ALL STATE AND LOCAL CODES.

PLUMB HOISTWAY:– _____ DUE TO CLOSE RUNNING CLEARANCES OWNER/AGENT MUST ENSURE THAT HOISTWAY AND PIT WHERE PROVIDED ARE LEVEL, PLUMB AND SQUARE AND ARE IN ACCORDANCE WITH THE DIMENSIONS ON THESE DRAWINGS.

MINIMUM OVERHEAD CLEARANCE:– _____ OWNER/AGENT MUST ENSURE MINIMUM OVERHEAD CLEARANCE IS IN COMPLIANCE WITH CODES.

CONSTRUCTION SITE:– _____ OWNER/AGENT TO PROVIDE ALL MASONRY, CARPENTRY AND DRYWALL WORK AS REQUIRED AND SHALL PATCH AND MAKE GOOD INCLUDING FINISH PAINTING ALL AREAS WHERE WALLS/FLOORS MAY REQUIRE TO BE CUT, DRILLED OR ALTERED IN ANY WAY TO PERMIT THE PROPER INSTALLATION OF THE LIFT.

DIMENSIONS:
CONTRACTOR/CUSTOMER TO VERIFY ALL DIMENSIONS AND REPORT ANY DISCREPANCIES TO OUR OFFICE IMMEDIATELY.

STRUCTURAL

FLOOR/SUPPORT WALL LOADS:– _____ STRUCTURE TO ANCHOR A CRANE MAST AND SAFETY HARNESS, WHERE APPLICABLE/NEEDED, TO BE PROVIDED BY CONTRACTOR. CONTRACTOR TO ASSURE THAT BUILDING AND SHAFT WILL SAFELY SUPPORT ALL LOADS IMPOSED BY THE LIFT EQUIPMENT. REFER TO THE TABLES ON THIS DRAWING FOR LOADS IMPOSED BY THE EQUIPMENT.

MACHINE ROOM (WHERE REQUIRED)

LOCATION / ACCESS:– _____ MACHINE ROOM LOCATED AT THE LOWEST LEVEL ADJACENT TO HOISTWAY, UNLESS SHOWN OTHERWISE ON THE LAYOUT DRAWINGS. FIELD ADJUSTMENT BY INSTALLER MAY BE NECESSARY TO MEET JOB SITE CONDITIONS OR REGULATIONS. MACHINE ROOM DOOR IS TO BE LOCKABLE AND IS TO MEET THE REQUIREMENTS OF THE AUTHORITY HAVING JURISDICTION.

SLEEVES FOR CABLE LINES:– _____ FROM MACHINE ROOM TO HOISTWAY AS REQUIRED. (PROVIDED PER INSTALLERS INSTRUCTIONS).

TABLE 3	DISCONNECT SIZE	TIME DELAY FUSE SIZE	VOLTS	PHASE	FLA
MOTOR & EQUIP.	30 AMPS	30 AMPS	208 volt	Three Phase	28.8 AMPS
MOTOR & EQUIP.	60 AMPS	40 AMPS	230 volt	Single Phase	35.4 AMPS
CAB LIGHTS	15 AMPS	15 AMPS	115 V	Single Phase	

ELECTRICAL

POWER SUPPLY:– _____ (SEE SPECIFICATIONS) LOCKABLE FUSED DISCONNECT WITH AUXILIARY CONTACT TO BRAKE THE BATTERY FEED, OR CIRCUIT BREAKERS WITH A 3-POLE BREAKER FOR BATTERY FEED REQUIRED. IN COMPLIANCE WITH ELECTRICAL CODE, AS FOLLOWS: LOCATED ON WALL ON LOCK JAMB SIDE OF MACHINE ROOM DOOR)

PERMANENT POWER:– _____ BEFORE INSTALLATION CAN BEGIN, PERMANENT POWER MUST BE SUPPLIED.

LIGHTING:– _____ THE ILLUMINATION SHALL BE NOT LESS THAN 200 LX (19 FC) AT THE FLOOR LEVEL IN ALL MACHINE ROOMS AND MACHINERY SPACES. ENSURE AT LEAST 100 LX (10 FC) AMBIENT LIGHTING OVER LIFT AREA.

PHONE:– _____ NEED A DEDICATED PHONE LAND LINE (NOT VoIP) FOR THE PHONE, WHERE APPLICABLE. FOR VoIP PLEASE CONTACT SAVARIA.

ENTRANCES

FASCIA PANEL BELOW UPPER LEVEL ENTRANCE:– _____ WHERE REQUIRED, FASCIA PANEL MUST BE FASTENED TO A SOLID WALL AND BE PERPENDICULAR TO THE FLOOR AND WALLS. HOISTWAY FASCIA IS NOT SELF-SUPPORTING FOR LONG, CONTINUOUS RUNS WITHOUT ENTRANCES. ADEQUATE SUPPORT FOR THIS FASCIA MUST BE PROVIDED.

ENTRANCE ASSEMBLIES:– _____ ENTRANCE ASSEMBLIES MUST BE ADJUSTED TO ALIGN WITH PLATFORM AND INTERLOCK EQUIPMENT. OTHERS TO ALLOW AN ADEQUATE ROUGH OPENING.

RETURN WALLS:– _____ RETURN WALLS AT ENTRANCES MUST BE BUILT-IN BY OTHERS AFTER ENTRANCE ASSEMBLIES ARE IN PLACE. ENTRANCE ASSEMBLY MUST BE SECURELY FASTENED TO WALLS BY ELEVATOR CONTRACTOR.

NOTE:
DIMENSIONS SHOWN ON DRAWING ARE FOR REFERENCE ONLY.
MAXIMUM SPACE BETWEEN RAIL BRACKETS NOT TO EXCEED 48"
NOTE 3:
REFER TO MANUAL BEFORE ADJUSTING THIS SETTING

NOTED REFUGE SPACE PROVIDED
BY PIT PROP 1067 mm (42") IN ACCORDANCE WITH CLAUSE 5.2.1.4.2.

LIFTING BEAM
A 4000LB MIN SWL BEAM MUST BE PROVIDED IN THE OVERHEAD. BEAM TO BE POSITIONED AS SHOWN IN ELEVATION & PLAN VIEWS FOR EVEREADY OF 108". POSITION THE UNDERSIDE OF BEAM AT 114" & BEAM MUST BE TEMPORARY.

TABLE 4

PIT / OVERHEAD REQUIREMENTS				
MAX. SPEED fpm/mm	PIT	TOTAL TRAVEL	MIN OVERHEAD NEW BLDG	MIN OVERHEAD EXISTING BLDG
30	14" mm		134" (3404)	148" (3759)

mm NOTE: Additional pit requirement may be required when over 34" deep - consult your local dealer for details

WARNING:
PERMITS ONLY APPLICABLE FOR SEISMIC ZONES 0 AND 1. FOR SEISMIC ZONES OTHER THAN 0 OR 1 PLEASE CONSULT WITH MANUFACTURER FOR REGIONAL SPECIFIC REQUIREMENTS.

REV-000

savaria

LU/LA
ORION MRL MODEL 4260(1R)