




SoftILE TRANSITIONING TO LOOSE FILL SURFACE

P.O. BOX 239, 4393 DISCOVERY LINE
 PETROLIA, ONTARIO
 N0N 1R0
 PHONE: (800) 263-2363
 PHONE: (519) 882-8799
 FAX: (519) 882-2697
 EMAIL: allinfo@sofsurfaces.com

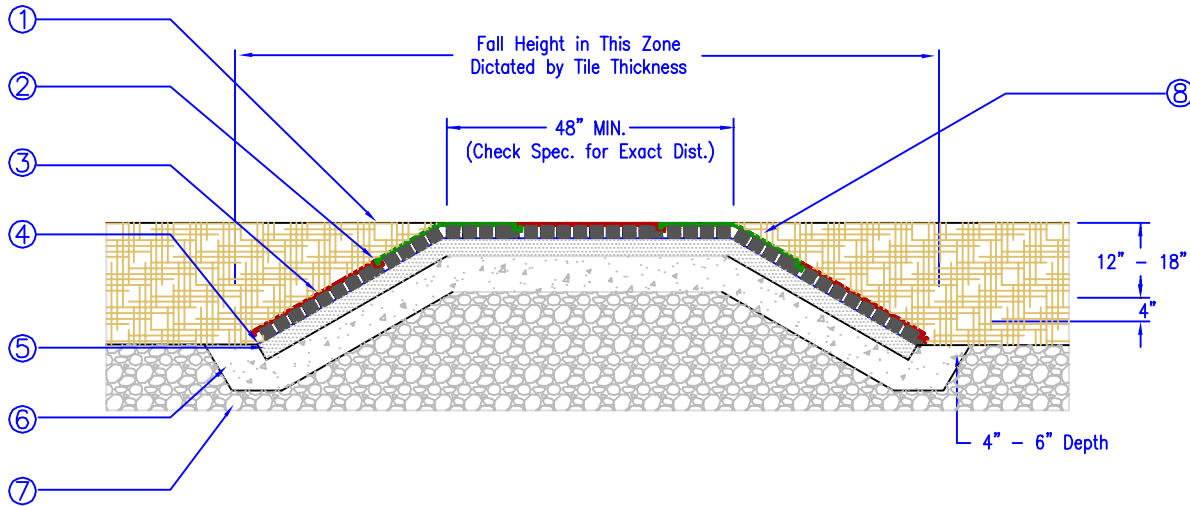

LEGEND:

- ① Engineered Wood Fiber or Approved Alternate Loose Fill Surface.
- ② 1/2" (12mm) Diameter Continuous Bead of SoftILE® Adhesive at Each KrosLOCK Joint.
- ③ SoftILE® (See Specifications for Thickness and Color).
- ④ Apply SoftILE® Adhesive to Entire Base Surface Prior to Installing Tiles With a 3/8 Notched Trowel (on sloped area only).
- ⑤ 3.00" (76mm) Concrete Base. Concrete to Have Minimum 2000 PSI (13.8 Mpa) Compressive Strength After 21 Days.
- ⑥ Compacted Granular B Type I (OPS).
- ⑦ Compacted Subgrade.
- ⑧ Tiles to be Secured with Weight at Transition Until Adhesive Cures – Min. 24Hrs.

THICKNESS	CRITICAL FALL HEIGHT (FT)		REVISIONS				
	WITH 10 YEAR PERFORMANCE WARRANTY PLUS SERIES	WITH 10 YEAR PERFORMANCE WARRANTY PREMIUM SERIES (EPDM)	REV	DESCRIPTION	DATE	APPR	
	1.75"	3.0	3.0	0	ORIGINAL ISSUE	03/13/03	
2.00"	4.0	4.0	1	TITLE REVISED	12/18/03		
2.25"	5.0	5.0	2	UPDATED	10/20/04		
2.50"	6.0	6.0					
2.75"	7.0	7.0					
3.75"	8.0	8.0					
4.00"	10.0	10.0					
			SIZE A	FSCM NO.	DWG NO. 2000-001	REV 2	
FILE NAME	A0001SK1	PREPARED BY	B.GOSS	SCALE	NTS	SHEET	SK1