


Skylights conform to and exceed test requirements of CAN/CGSB-63.14M89, "Plastic Skylights", Class A, Type 2 or Type 3.

Fall Protection Series (FPS) Skylights are suitable for use on all type roofs. Designed for mounting on 1/2" (38mm) curbs with flashing (by others), these units provide fall protection conforming to OSHA regulation CFR 1910.23(e)(8) Fall Impact Load Test for skylights.

- Custom sizes are available upon request

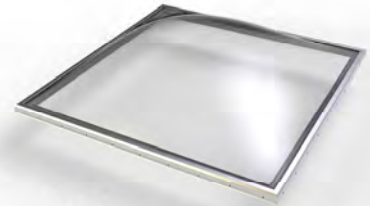

Model FPS-FF Available Sizes			
Model #	B x B Dimensions	Dome Color	QTY
FPS-FF 2020	14 1/4" x 14 1/4" (362mm x 362mm)		
FPS-FF 2052	14 1/4" x 46 1/4" (362mm x 1175mm)		
FPS-FF 2828	22 1/4" x 22 1/4" (565mm x 565mm)		
FPS-FF 2836	22 1/4" x 30 1/4" (565mm x 768mm)		
FPS-FF 2852	22 1/4" x 46 1/4" (565mm x 1175mm)		
FPS-FF 2860	22 1/4" x 55" (565mm x 1397mm)		
FPS-FF 2876	22 1/4" x 69 1/2" (565mm x 1765mm)		
FPS-FF 2896	22 1/4" x 89 1/2" (565mm x 2273mm)		
FPS-FF 3636	30 1/4" x 30 1/4" (768mm x 768mm)		
FPS-FF 3642	30 1/4" x 37" (768mm x 940mm)		
FPS-FF 3652	30 1/4" x 46 1/4" (768mm x 1175mm)		
FPS-FF 3660	30 1/4" x 55" (768mm x 1397mm)		
FPS-FF 3676	30 1/4" x 69 1/2" (768mm x 1765mm)		
FPS-FF 3696	30 1/4" x 89 1/2" (768mm x 2273mm)		
FPS-FF 4242	37" x 37" (940mm x 940mm)		
FPS-FF 4252	37" x 46 1/4" (940mm x 1175mm)		
FPS-FF 4280	37" x 75" (940mm x 1905mm)		
FPS-FF 5252	46 1/4" x 46 1/4" (1175mm x 1175mm)		
FPS-FF 5260	46 1/4" x 55" (1175mm x 1397mm)		
FPS-FF 5276	46 1/4" x 69 1/2" (1175mm x 1765mm)		
FPS-FF 5280	46 1/4" x 75" (1175mm x 1905mm)		
FPS-FF 5296	46 1/4" x 89 1/2" (1175mm x 2273mm)		
FPS-FF 6060	55" x 55" (1397mm x 1397mm)		
FPS-FF 6076	55" x 69 1/2" (1397mm x 1765mm)		
FPS-FF 6096	55" x 89 1/2" (1397mm x 2273mm)		
FPS-FF 7272	67" x 67" (1702mm x 1702mm)		
FPS-FF 7296	67" x 89 1/2" (1702mm x 2273mm)		
FPS-FF CUSTOM			

Dome Colors Available			
Dome Color	Colour Code		
Clear	- C		

Specifications:

Skylight shall be factory assembled Model No. _____ FPS-FF as manufactured by Artistic Skylight Domes Ltd. Vaughan, Ontario. Glazing shall consist of clear, sealed double Mustang[®] copolyester high impact domes (or sealed triple domes) . The skylight shall consist of corrosion resistant extruded aluminum curb frame, 6063-T5 alloy, with heliarc welded corners. The skylight curb frame shall have an extruded rigid vinyl thermal break (to prevent thermal transfer to interior of building) which incorporates a high capacity, 5 degree sloped condensation gutter with drainage to exterior, and co-extruded rubber draft seal. The retaining cap frame shall be extruded, mill finish, 6063-T5 aluminum alloy with heliarc welded corners. Domes to be sealed to frame with Silpruf[®] High Strength Waterproofing Sealant & Structural Glazing Silicone.

Project: _____

Contractor: _____

Architect: _____

Approved By: _____

Date: _____

