



MASONRY OPENING WIDTH C	ACTIVE LEAF WIDTH D & E	DOOR OPENING A	OVERALL FRAME HEIGHT	ROUGH OPENING HEIGHT	OVERALL FRAME WIDTH B
42" (1066.8)	23 11/16" (601.7)	34 5/8" (879.5)	91" (2311.4)	84" (2133.6)	69 5/16" (1760.5)
48" (1219.2)	31 1/16" (789.7)	42 1/8" (1073.5)	91" (2311.4)	84" (2133.6)	77 1/16" (1956.5)
54" (1371.6)	38 11/16" (982.7)	49 5/8" (1258.5)	91" (2311.4)	84" (2133.6)	85 1/16" (2166.5)
60" (1524.0)	45 11/16" (1135.1)	56 5/8" (1413.5)	91" (2311.4)	84" (2133.6)	93 1/16" (2366.5)
66" (1676.4)	52 11/16" (1287.5)	63 5/8" (1568.5)	91" (2311.4)	84" (2133.6)	101 1/16" (2566.5)
72" (1828.8)	59 11/16" (1440.0)	70 5/8" (1723.5)	91" (2311.4)	84" (2133.6)	109 1/16" (2766.5)
78" (1981.2)	66 11/16" (1592.4)	77 5/8" (1878.5)	91" (2311.4)	84" (2133.6)	117 1/16" (2966.5)
84" (2133.6)	73 11/16" (1744.8)	84 5/8" (2033.5)	91" (2311.4)	84" (2133.6)	125 1/16" (3166.5)
90" (2286.0)	80 11/16" (1897.2)	91 5/8" (2188.5)	91" (2311.4)	84" (2133.6)	133 1/16" (3366.5)
96" (2438.4)	87 11/16" (2049.6)	98 5/8" (2343.5)	91" (2311.4)	84" (2133.6)	141 1/16" (3566.5)
KEY	(C/2)+2 11/16"	C-7.375	DFH+7	DFH-7	(3C/2)+6 5/16"
	(C/2)+(68.3)	C-(187.3)	RHH+(17.8)	DFH-(17.8)	(3C/2)+(160.3)

DFV NOTE: CONSULT FACTORY FOR EXTENDED HEADERS.

STD. GLASS SIZE KEY*	WIDTH - 'D'	HEIGHT
	C/2-2 3/16"	DFH-15 7/8"
	C/2-(55.6)	DFH-(403.2)
	C/2-2 5/16"	
	C/2-(58.7)	

NOTE: THE STANDARD PACKAGE CONSISTS OF: THE AUTOMATIC OPERATOR & WEATHERSTRIP, FRAMES, DOORS WITH VERTICAL WEATHERSTRIP, EMERGENCY BREAKAWAY, 1-POINT LOCK, OPTIONAL POSITION SWITCHES (DIGITAL (3) OR SD) OR KEY (35), (OFF-EXIT ONLY-AUTO-REDUCED OPENING-HOLD) OPEN OR OFF, AUTO, HOLD OPEN, MOTION/PRESENCE SENSORS. STANDARD FINISH: CLEAR-AA-M2C22A41, CLASS 1, .018 MM. DARK BRONZE-AA-M2C22A44, CLASS 1, .018 MM. SPECIAL FINISHES ARE AVAILABLE.

THIS PACKAGE WILL ACCEPT UP TO 1" (25.4) INSULATED GLASS. NOTE DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC REF. AS FOLLOWS 1" (25.4) ALL METRIC SIZES ARE MILLIMETERS. FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT SPECIFICATION, INSTALLATION INSTRUCTIONS, OR THE UL LABEL ON THE EQUIPMENT. REFER TO RELEVANT LOCAL, STATE, NATIONAL OR AHD BUILDING CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE. FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE BELOW.

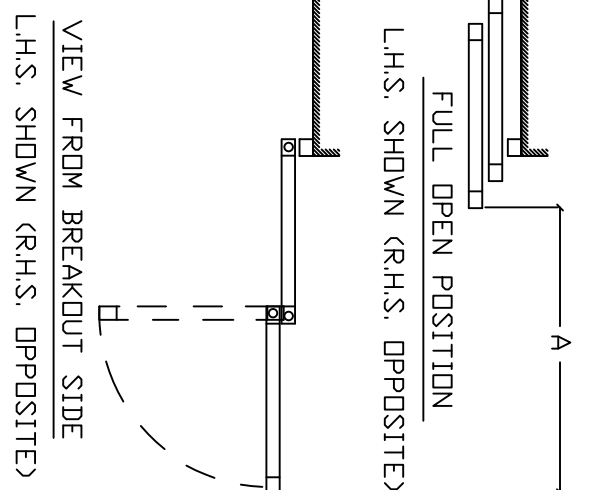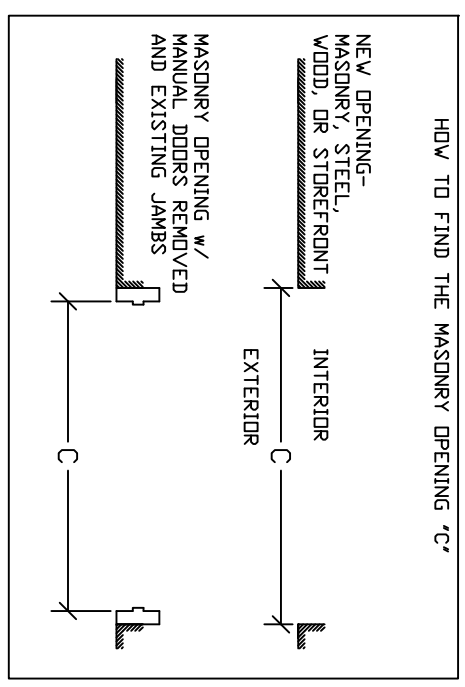

DWG NO. 1010836

DRN BY	CLW	DATE	CHK BY	SS	DATE	REV	DATE
		6/4/13			6/4/13	5.0	8/22/16

## ASSA ABLOY