

NOTE: THE STANDARD PACKAGE CONSISTS OF:
 THE AUTOMATIC OPERATOR & WEATHERSTRIP, FRAMES, DOORS WITH
 VERTICAL WEATHERSTRIP, EMERGENCY BREAKAWAY
 & 1-POINT LOCK. OPTIONAL 5 POSITION SWITCHES (DIGITAL (3 OR 5)
 OR KEY (5)), (OFF-EXIT ONLY-AUTO-REDUCED OPENING-HOLD OPEN OR
 OFF-AUTO, HOLD OPEN), MOTION/PRESENCE SENSORS,
 STANDARD FINISH: CLEAR-AA-M12C22A41, CLASS 1, .018 MM,
 DARK BRONZE-AA-M12C22A44, CLASS 1, .018 MM
 SPECIAL FINISHES ARE AVAILABLE.

THIS PACKAGE WILL ACCEPT UP TO 1" (25.4) INSULATED GLASS.

NOTE DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC
 REF. AS FOLLOWS 1" (25.4) ALL METRIC SIZES ARE MILLIMETERS.

* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT
 SPECIFICATION, INSTALLATION INSTRUCTIONS, OR THE UL
 LABEL ON THE EQUIPMENT.


REFER TO RELEVANT (LOCAL, STATE, NATIONAL OR AHA) BUILDING
 CODE FOR MIN. DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE
 FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE BELOW.

MASONRY OPENING WIDTH C	ACTIVE LEAF WIDTH D	DOOR OPENING A	OVERALL FRAME HEIGHT	ROUGH OPENING HEIGHT	OVERALL FRAME WIDTH B
36" (914.4)	38 5/8" (981.1)	32 3/8" (822.3)	91" (2311.4)	84" (2134)	78 1/4" (1987.6)
42" (1066.8)	44 5/8" (1133.3)	38 3/8" (974.7)	91" (2311.4)	84" (2134)	90 1/4" (2292.4)
48" (1219.2)	50 5/8" (1285.9)	44 3/8" (1127.1)	91" (2311.4)	84" (2134)	102 1/4" (2597.2)
50 7/8" (1292.2)	53 1/2" (1358.9)	47 1/4" (1200.2)	91" (2311.4)	84" (2134)	108" (2743.2)
KEY	C+2 5/8" (C+66.7)	C-3 5/8" (C-92.1)	RDH+7" (RDH+177.8)	DFH-7" (DFH-177.8)	2C+6 1/4" (2C+158.8)

DFW NOTE: CONSULT FACTORY FOR EXTENDED HEADERS.

STD. GLASS SIZE KEY*	WIDTH	HEIGHT	*FDR SIDELITE, MINUS 1/8" FROM GLASS FORMULA SHOWN
C-2	1/4"	(DFH)-15 7/8"	
C-57	2"	(DFH)-(403.2)	

* NARROW STILE RAILS W/ 1/4" GUTTER, NO MUTTINGS BASED ON MASONRY OPENING

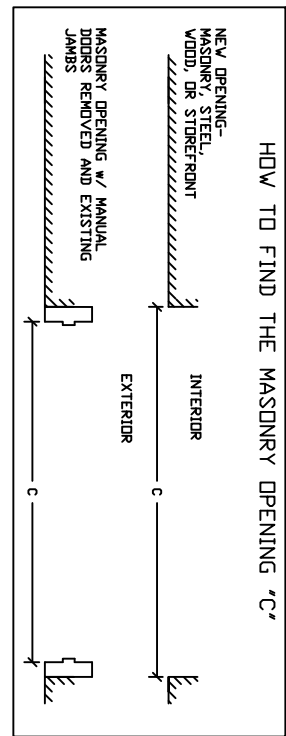

VIEW FROM BREAKOUT SIDE

DWG. NO.	1011268
DRN BY	CLW
DATE	8/26/13
CHK BY	SS
DATE	8/26/13
REV	4.0
DATE	8/22/16