ASSA ABLOY Entrance Systems
1900 Airport Road
Monroe, NC 28110
Phone: 1-866-237-2687
specdesk.na.besam@assaabloy.com

BESAM POWERSWING - LOW ENERGY SURFACE APPLIED SWING DOOR OPERATOR " PUSH APPLICATION "

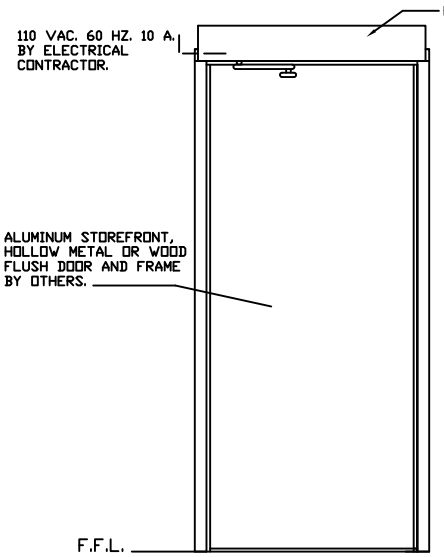

INTERIOR ELEVATION

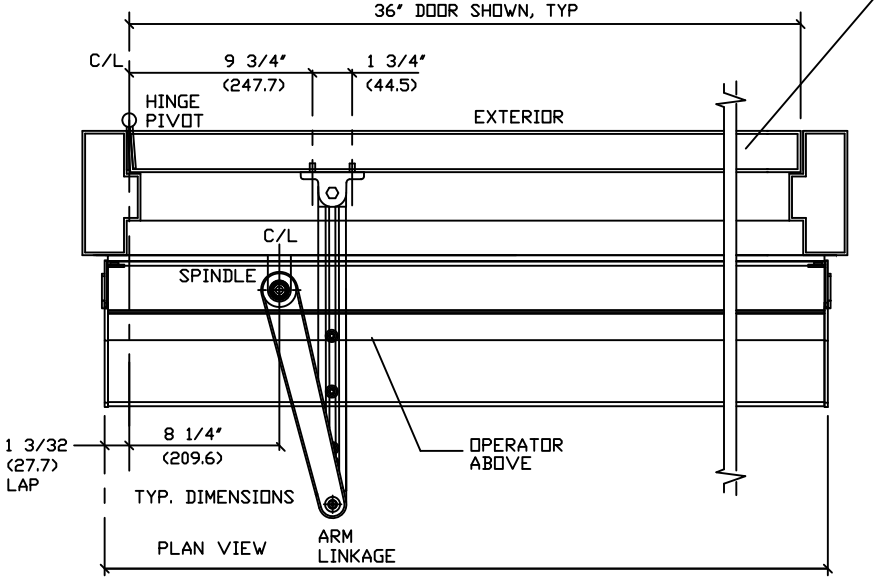

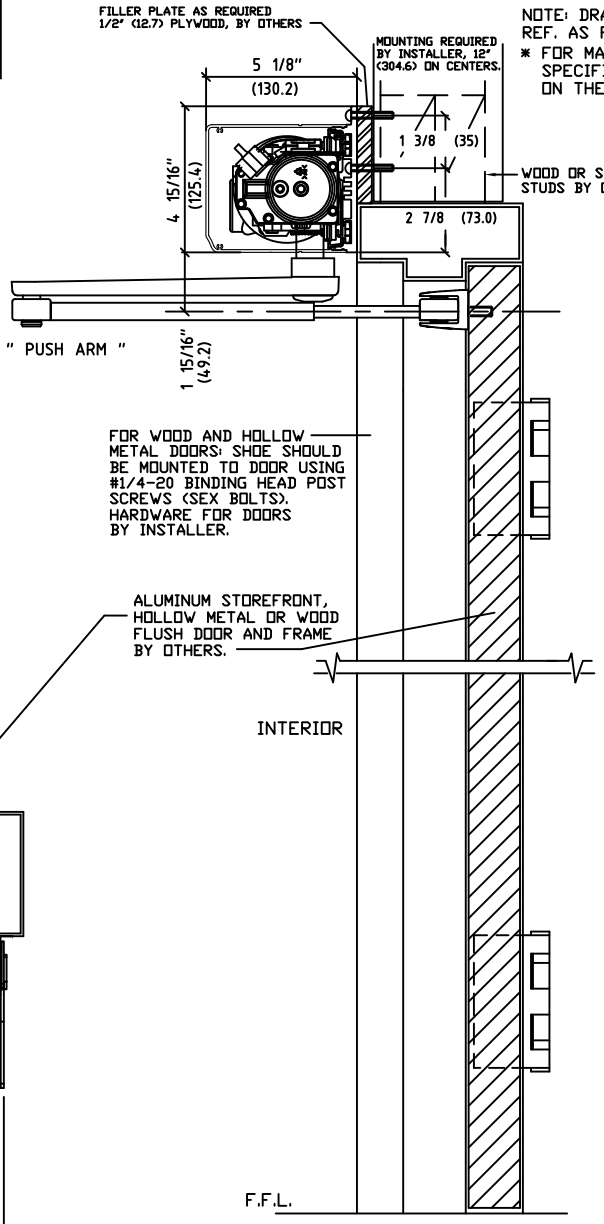

NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC. REF. AS FOLLOWS: 1" (25.4). ALL METRIC SIZES ARE IN MILLIMETERS.

* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT SPECIFICATION, INSTALLATION INSTRUCTIONS, OR THE UL LABEL ON THE EQUIPMENT.

EXPLANATION OF USE

MANUAL USE :-

PUSH OR PULL THE DOOR OPEN AND IT CLOSES AS A NORMAL MANUAL DOOR CLOSER.

AUTOMATIC :-

ACTIVATE THE DOOR BY HANDICAPPED PUSHPLATE AND THE DOOR WILL SLOWLY POWER OPEN, TIME OUT, AND SLOWLY CLOSE.

PUSH ACTIVATION :- (OPTIONAL)

PUSH OR PULL THE DOOR AND IT WILL SLOWLY POWER OPEN , TIME OUT, AND SLOWLY CLOSE.

NOTE :- OPERATIONAL ADJUSTMENTS TO BE IN ACCORDANCE WITH ANSI/BHMA 156.19 STANDARD FOR LOW ENERGY POWER OPERATED DOORS.

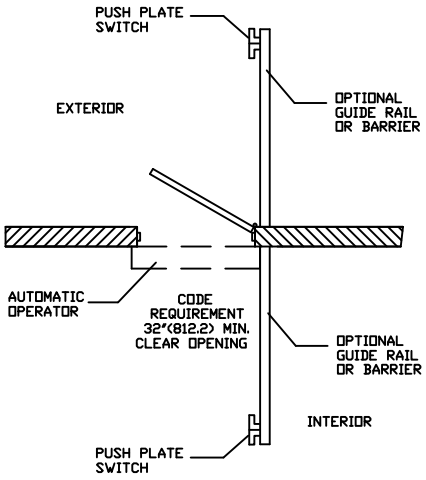

DWG NO.	1015834						
DRN BY	MHW	DATE	10/11/16	CHK BY	SS	DATE	10/11/16	REV.	F	DATE	

ASSA ABLOY