


## NOTES:

1. FASTEN COATED METAL FLASHING TO WOOD NAILERS USING 1-1/2" (4cm) MIN. RING SHANK NAILS SPACED 6" (15cm) ON CENTER AND STAGGERED APPROX. 1/2" (1.5cm).
2. REFER TO THERMOPLASTIC **U-5B** DETAIL FOR FLASHING VERTICAL JOINTS IN COATED METAL.



OUTSIDE CORNER  
BEFORE INSTALLATION

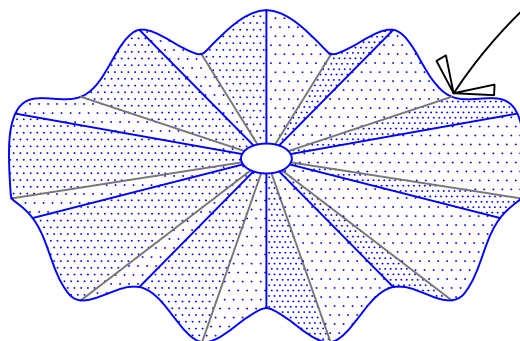

OUTSIDE CORNER WITH COATED  
METAL WALL FLASHING

MAXIMUM WARRANTY: 30 YEARS



DETAIL NO.

U-15F

THERMOPLASTIC UNIVERSAL