


METALWRAP 100 SERIES

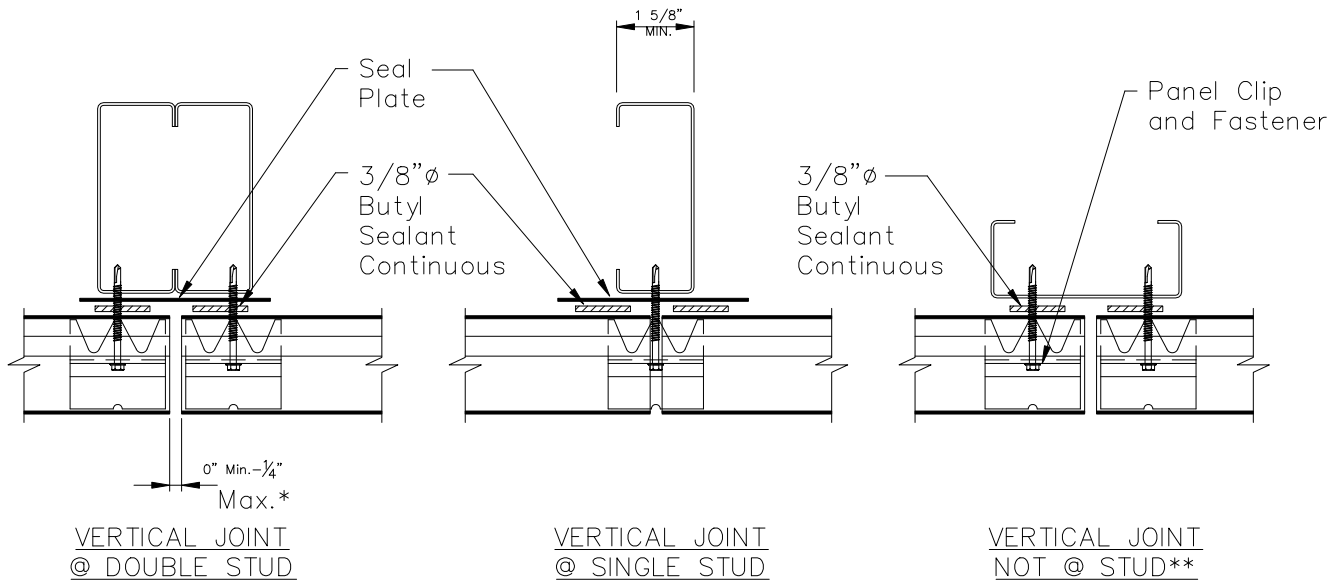

* Without the Need to Add Additional Low-Expansion Foam

** Limited to standard 16" or 24" stud spacing

Horizontal Section Describing Three Approved Methods of Panel End Support

Two 3/8" ϕ beads of high grade butyl sealant are field applied to the seal plate at panel ends, joints, perimeters and cut edges.

Place 3/8" ϕ bead of high grade butyl sealant over the panel liner male leg as shown. This "marriage bead" will connect the shop installed butyl sealant in the side joint of the panel above to the field applied butyl of the seal plate at the panel ends.

