


* $\frac{1}{8}$ "Ø POP RIVET @ 3'-0" O.C. MAX.
REQUIRED ON FIRE SIDE OF PANELS.
(#6-20 X $\frac{3}{8}$ " SELF DRILLER CAN BE
USED AS AN ALTERNATIVE FASTENER)

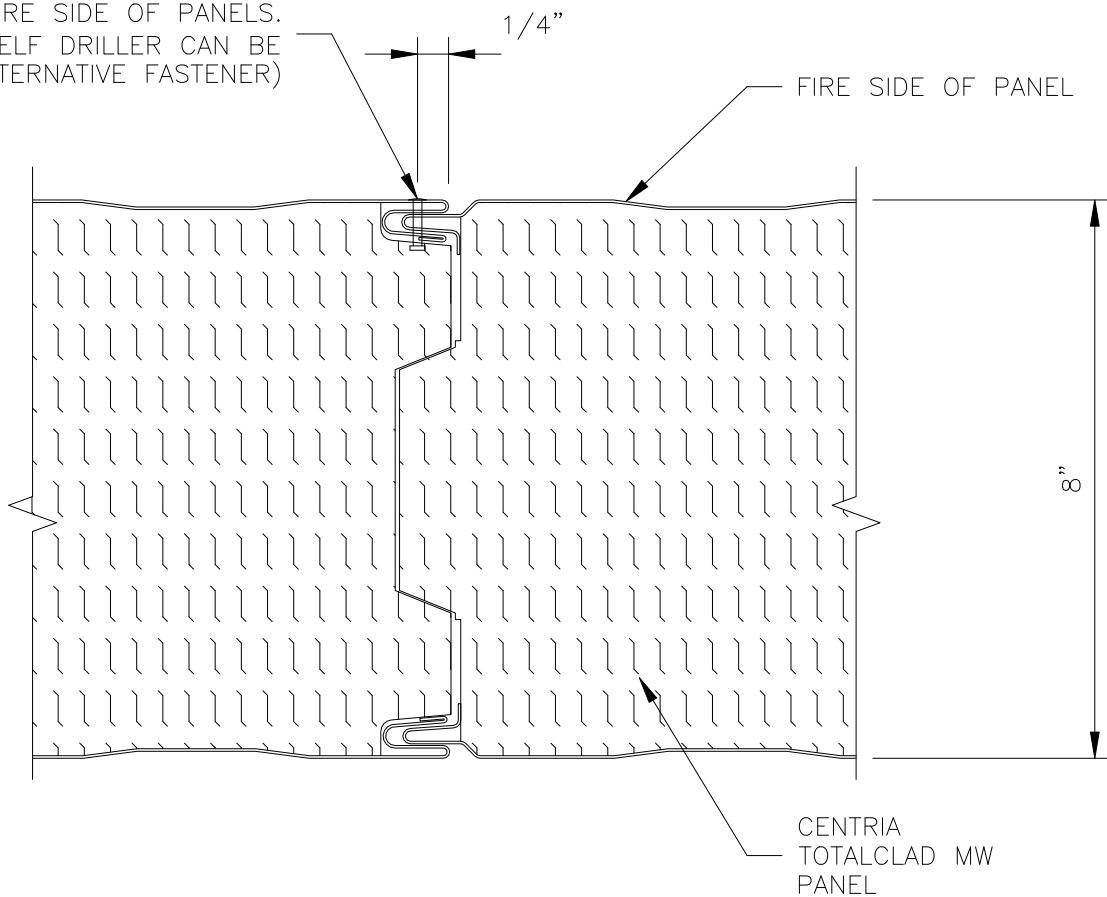

PANEL JOINT FASTENING

***IMPORTANT:**
REQUIRED ONLY ON THE FIRE SIDES OF 3 HR. FIRE
RESISTANCE RATED 8" THICK TOTALCLAD MW PANELS

3 HR. RATING JOINT FASTENING **8" TOTALCLAD MW PANEL**



CENTRIA
CENTRIA Architectural Systems

COMMERCIAL AND INDUSTRIAL

Feb18