

4


3

2

1

B

B

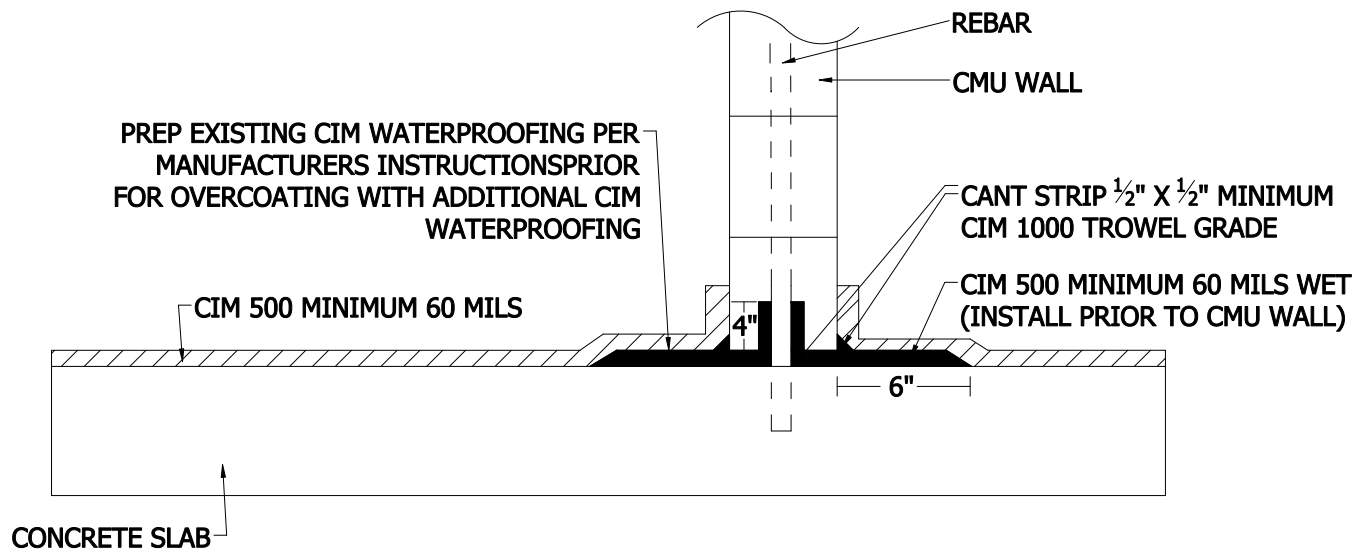

CONCRETE SLAB

REBAR

CMU WALL

CANT STRIP 1/2" X 1/2" MINIMUM
CIM 1000 TROWEL GRADE

CIM 500 MINIMUM 60 MILS WET
(INSTALL PRIOR TO CMU WALL)

4"

6"

A

A

- NOTES: 1. (OPTIONAL/NOT SHOWN) PRIME CONCRETE AND CMU WALL WITH CIM EMT EPOXY PRIMER.
2. REBAR MUST BE ABRADED AND APPLY CIM VOC COMPLIANT BONDING AGENT TO EXPOSED METAL.
3. CIM MAY BE APPLIED AT THICKNESSES GREATER THAN 60 MILS. CONTACT CIM FOR INFORMATION ON EXTENDED WARRANTIES.



TITLE			
CONCRETE DECK TO CMU WALL WATERPROOFING			
SIZE		DWG NO	REV
		CIM500-C0013	
SCALE	NONE	SHEET 1 OF 1	

4

3

2

1

A

A