




PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.

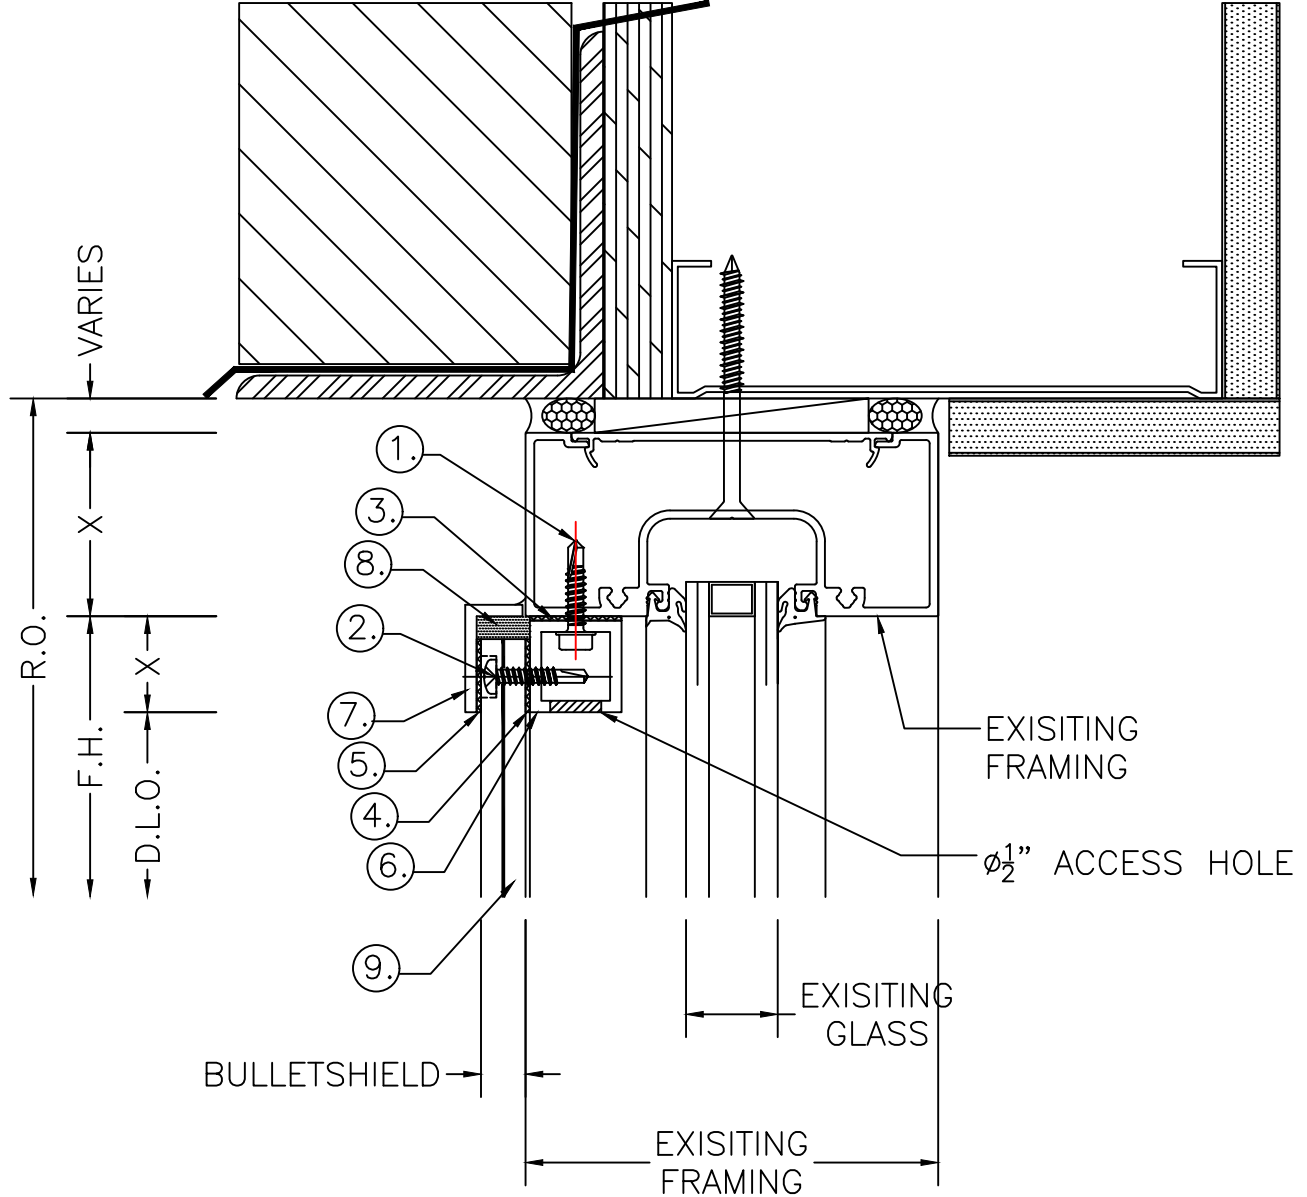

VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

1
D.2

HEAD

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™




- ①. #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ②. #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN .500 BULLET SHIELD.
- ③. 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④. $\frac{3}{4}$ " WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤. $\frac{3}{4}$ " WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSHIELD.
- ⑥. 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦. 1" x .125 (6061) ALUM. ANGLE
- ⑧. DOW 995 PERIMETER SEALANT
- ⑨. .500 BULLET SHIELD
- ⑩. VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

2 HORIZONTAL
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:



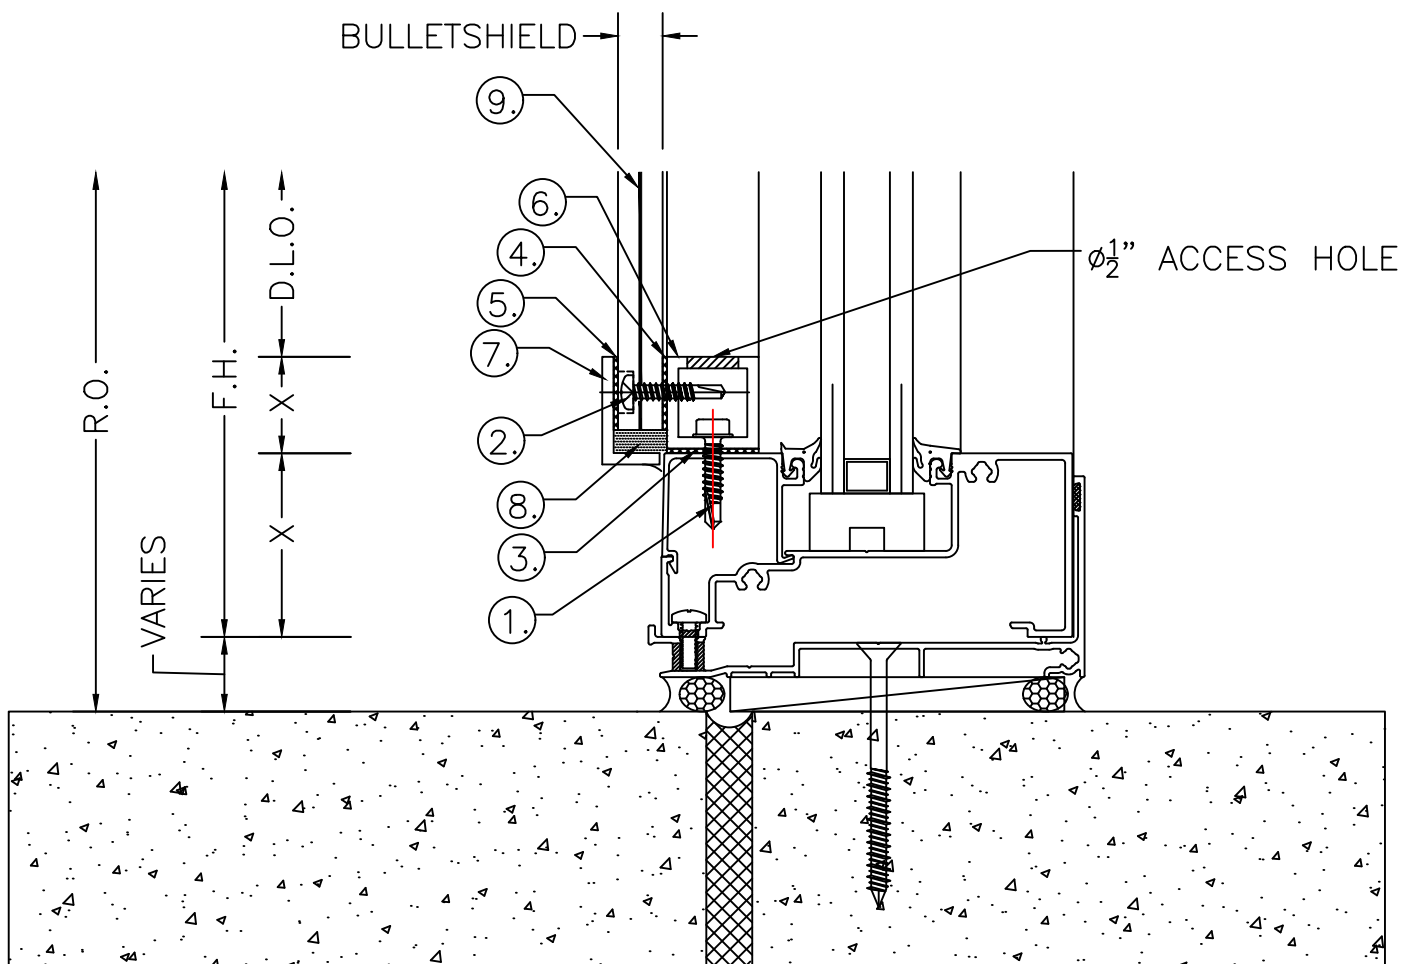

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.




VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

3
D.2

SILL

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

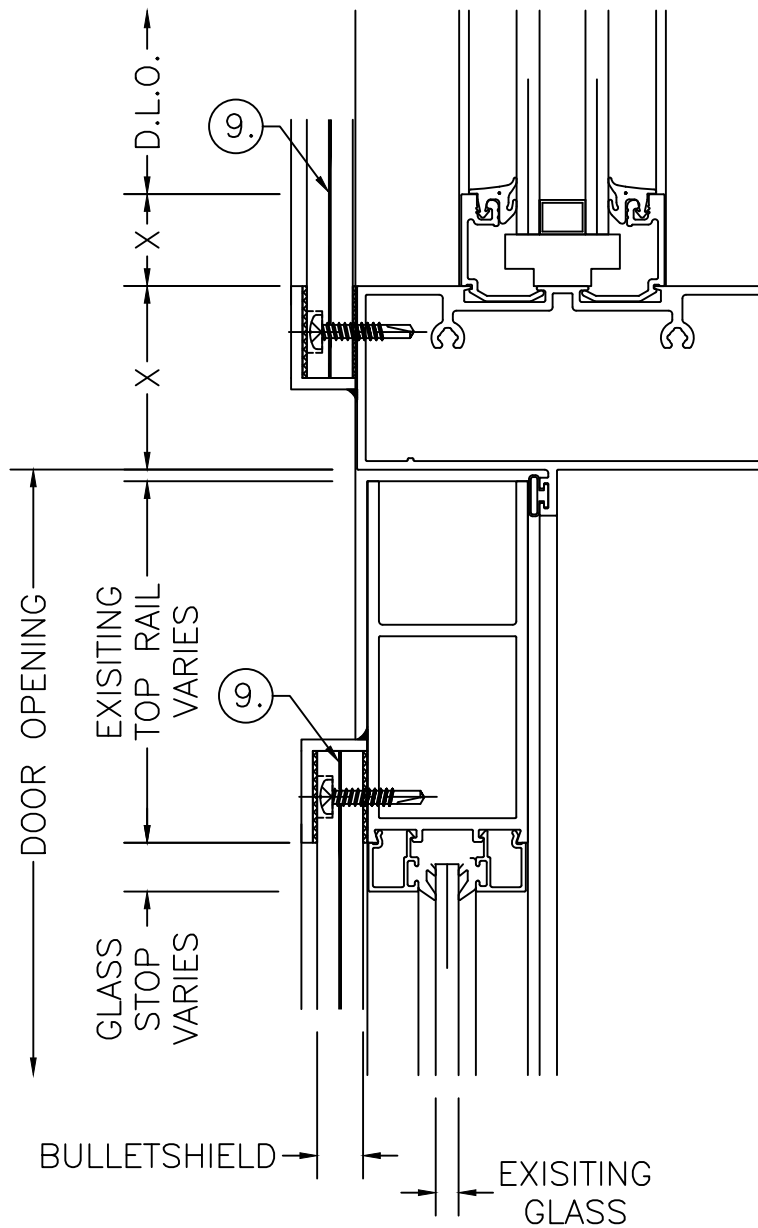

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.


TRANSOM BAR

4

D.2

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

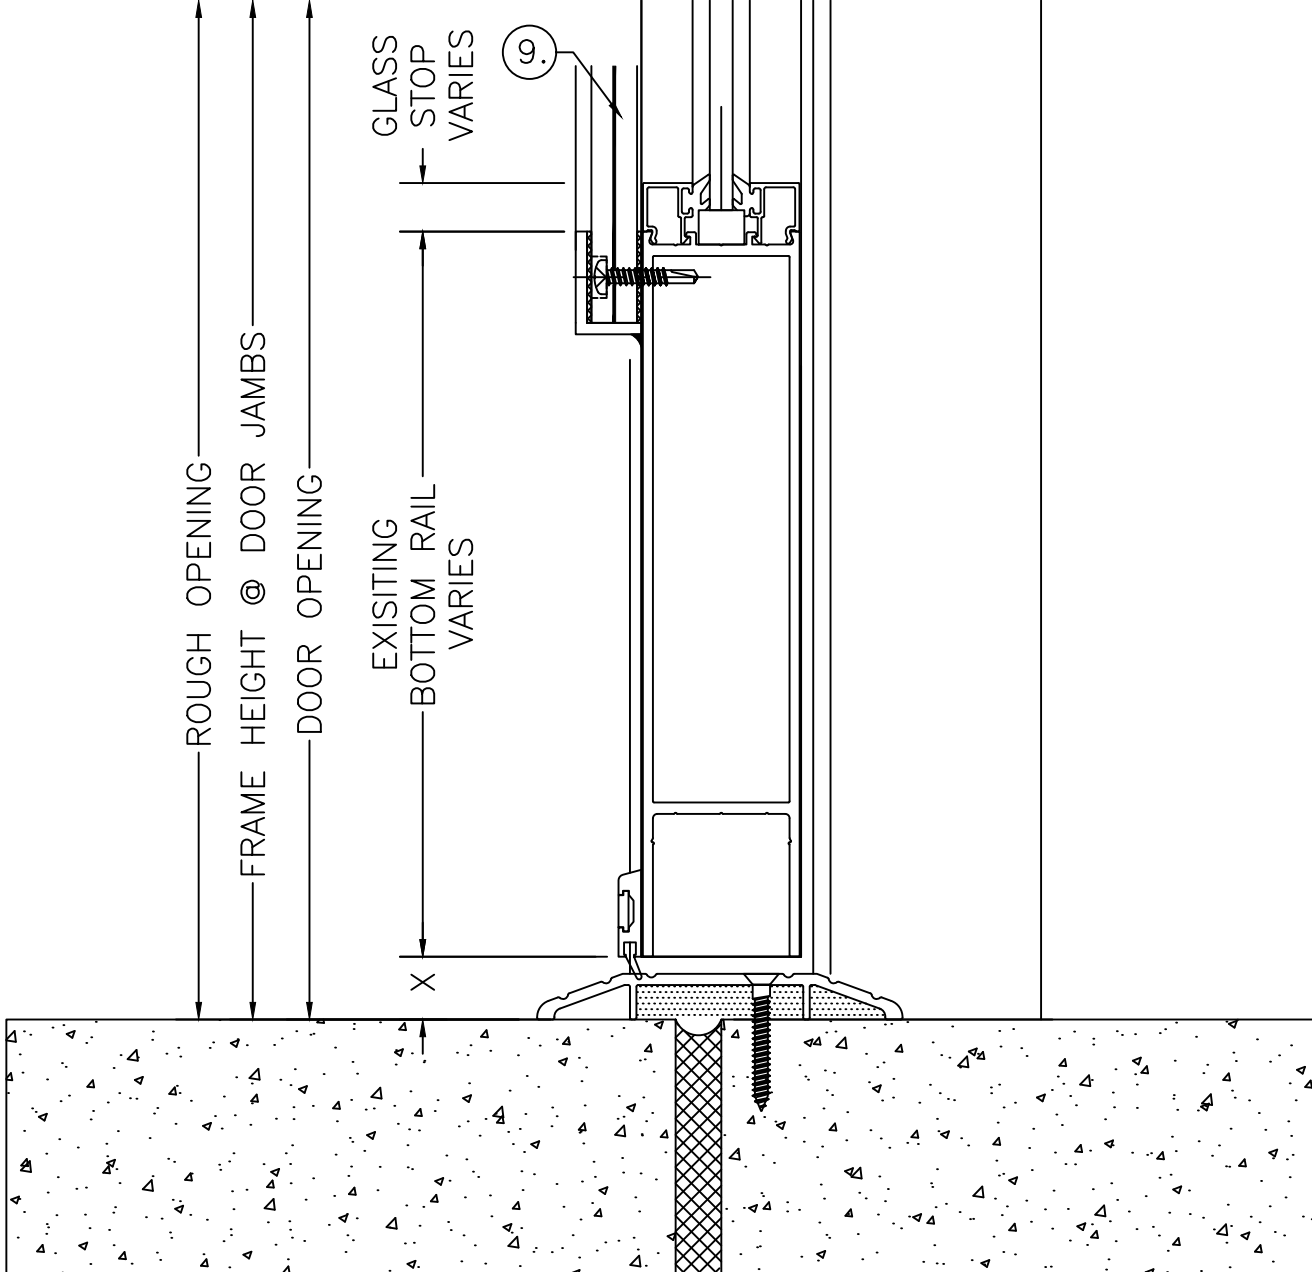

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

DOOR
5 THRESHOLD
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

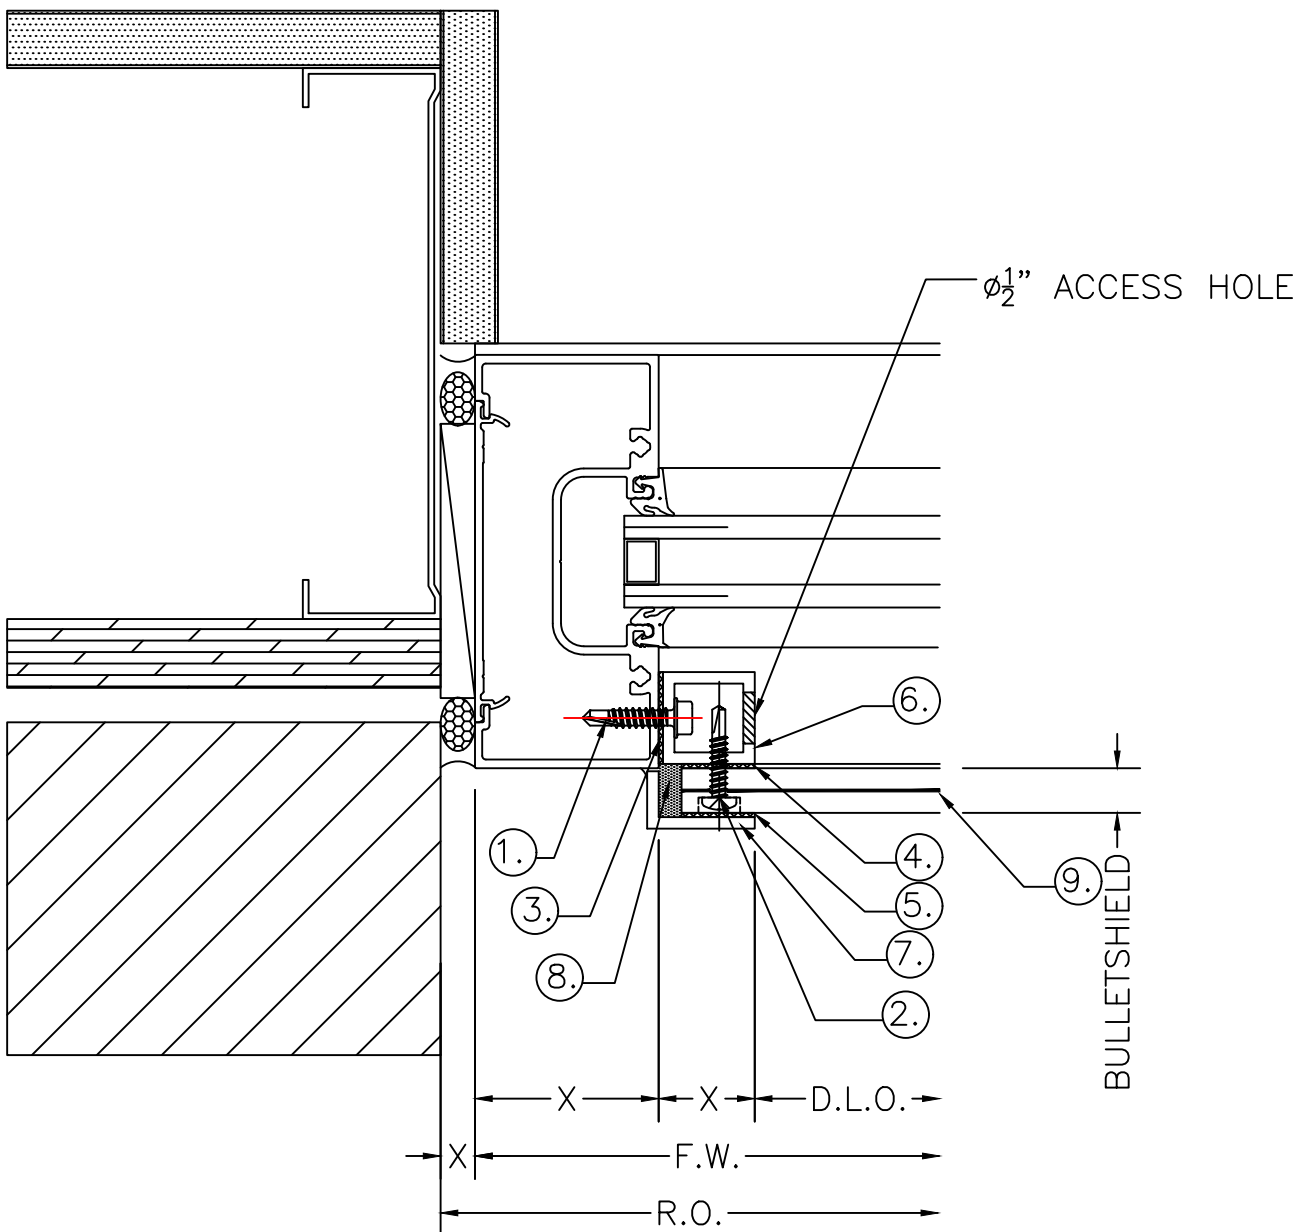

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

6 JAMB
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

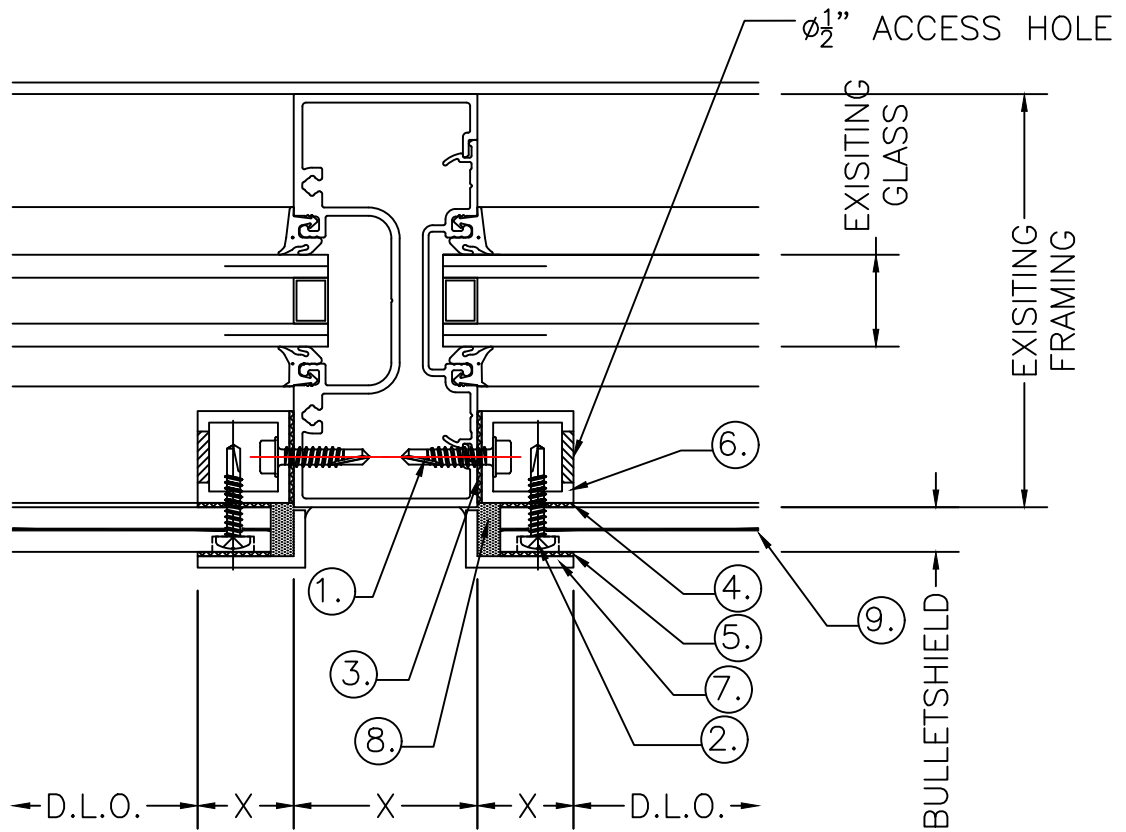

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

7 VERTICAL
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:



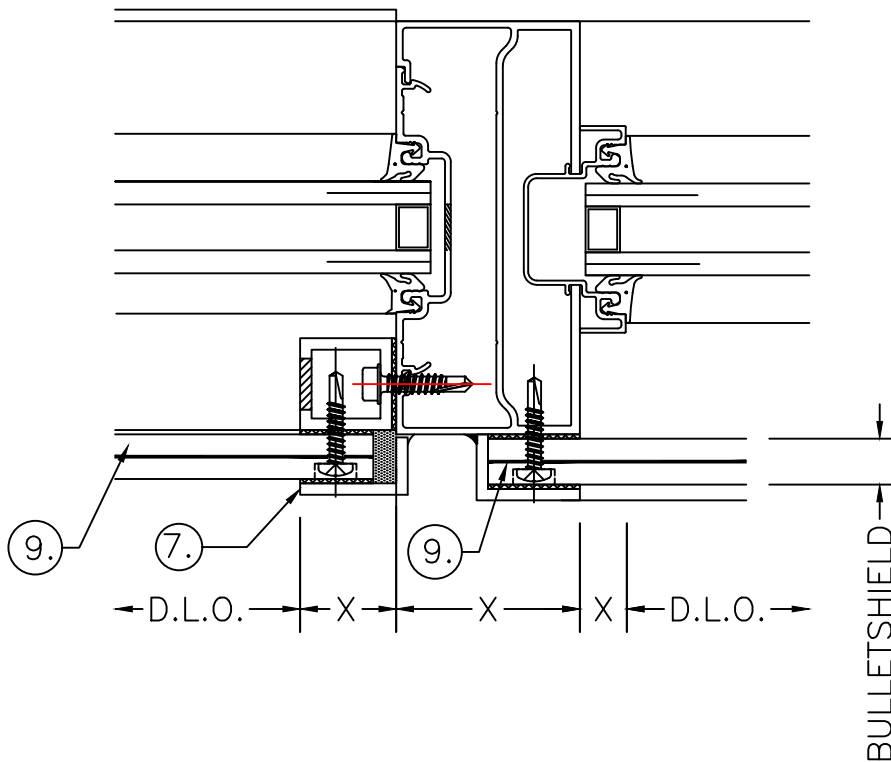

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLET SHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

8 TRANSOM
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:



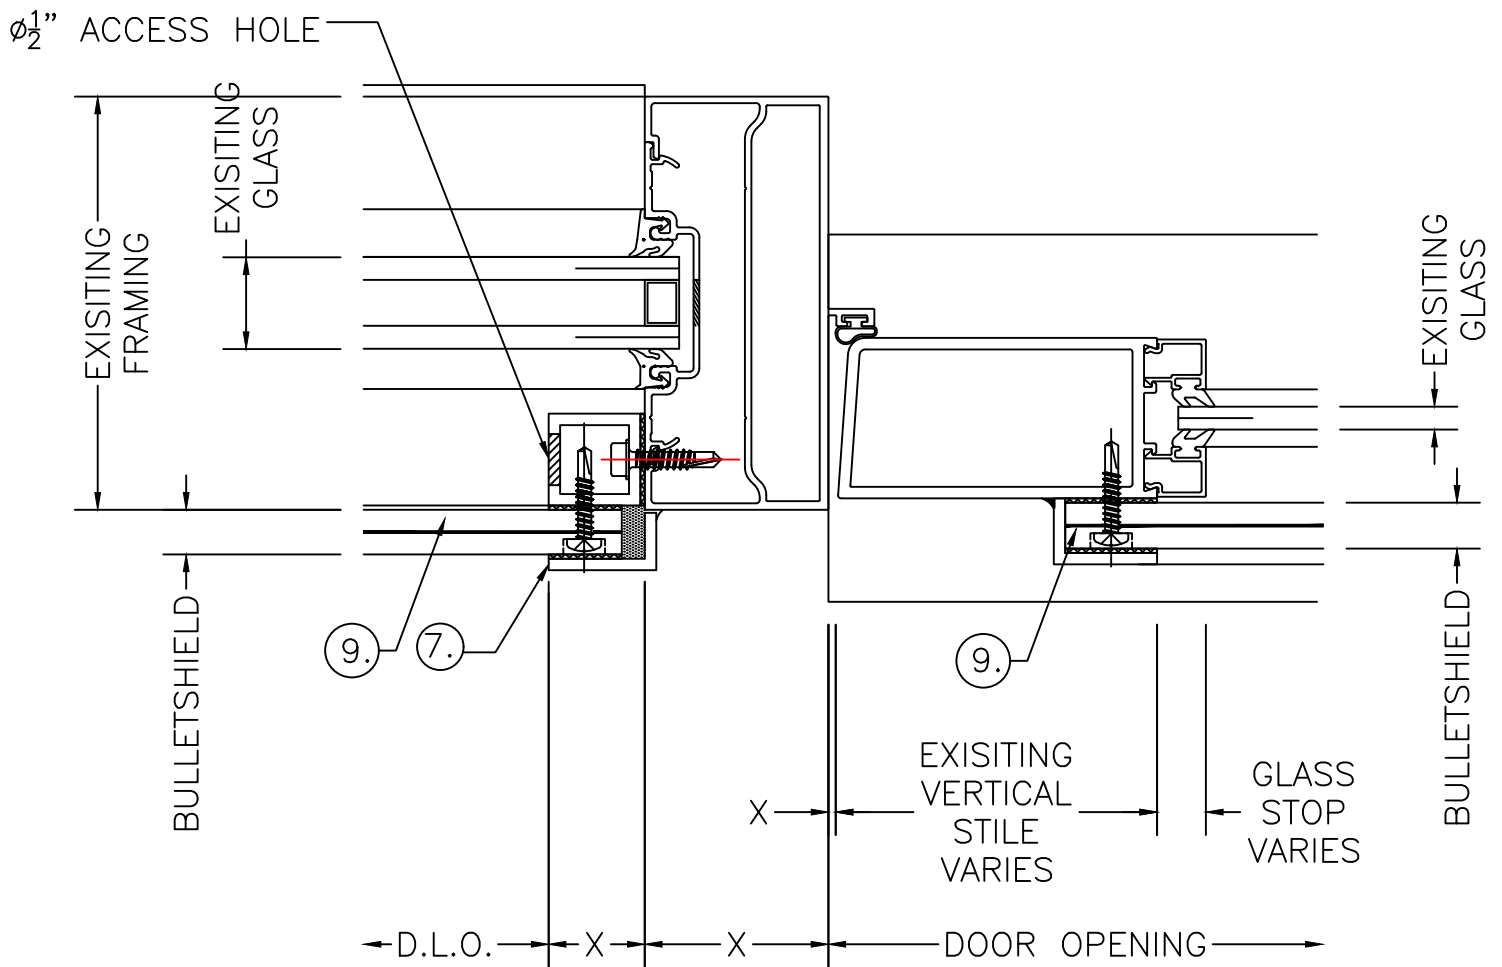

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

9 DOOR JAMB
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

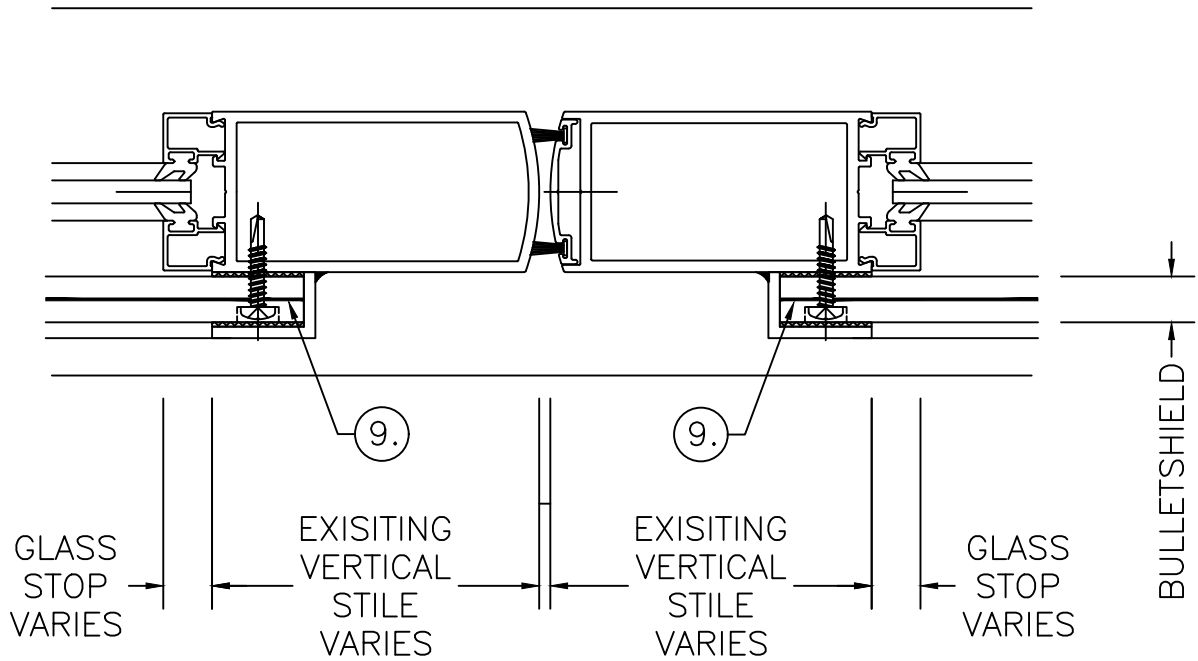

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.




VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

10
D.2

MEETING

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

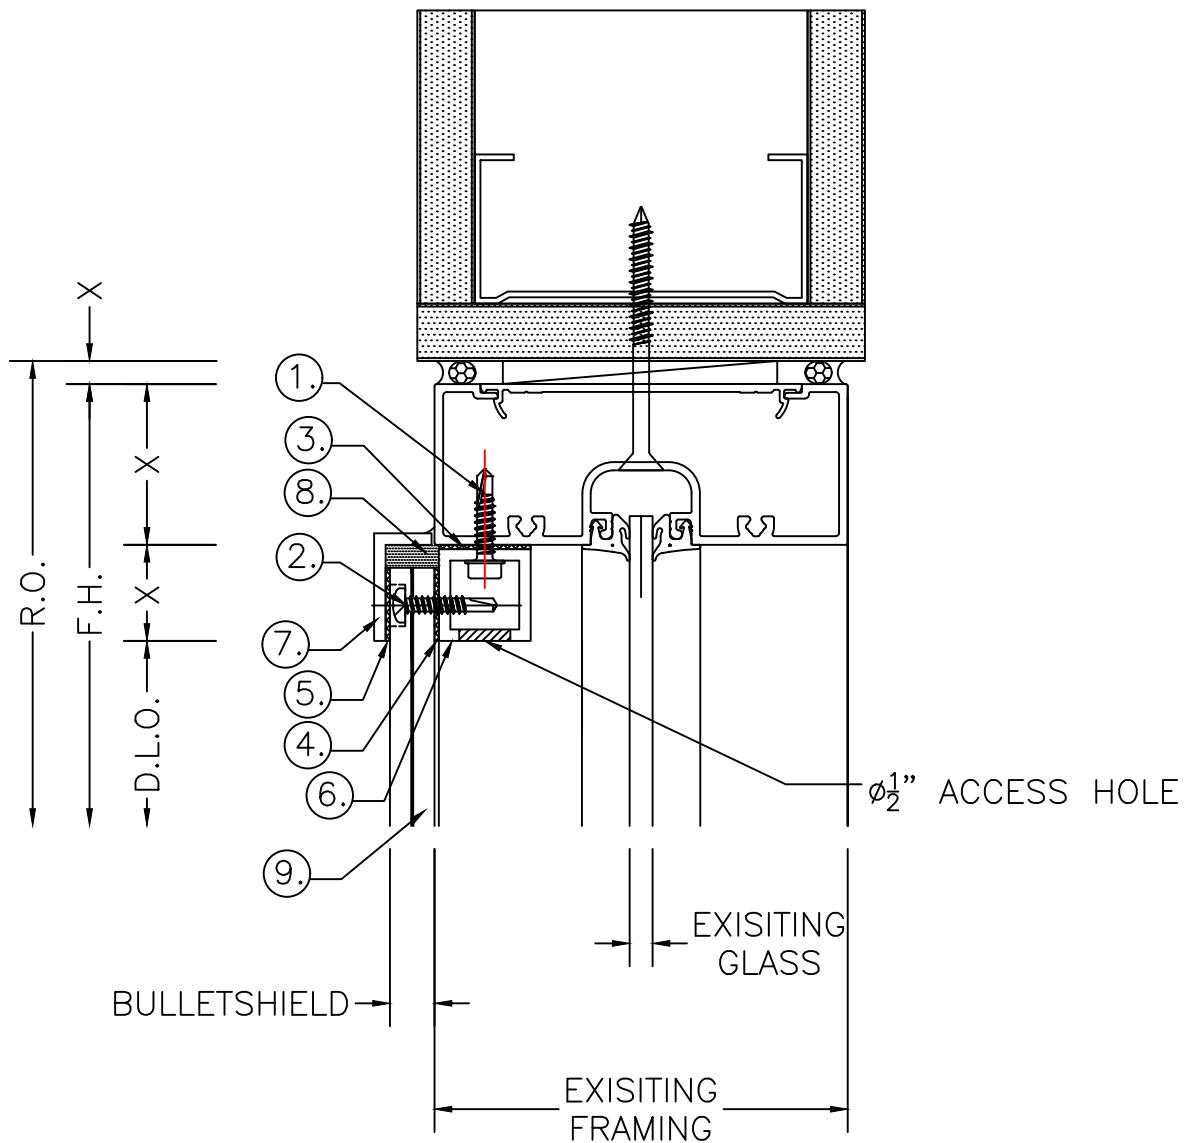

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

1 HEAD
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:



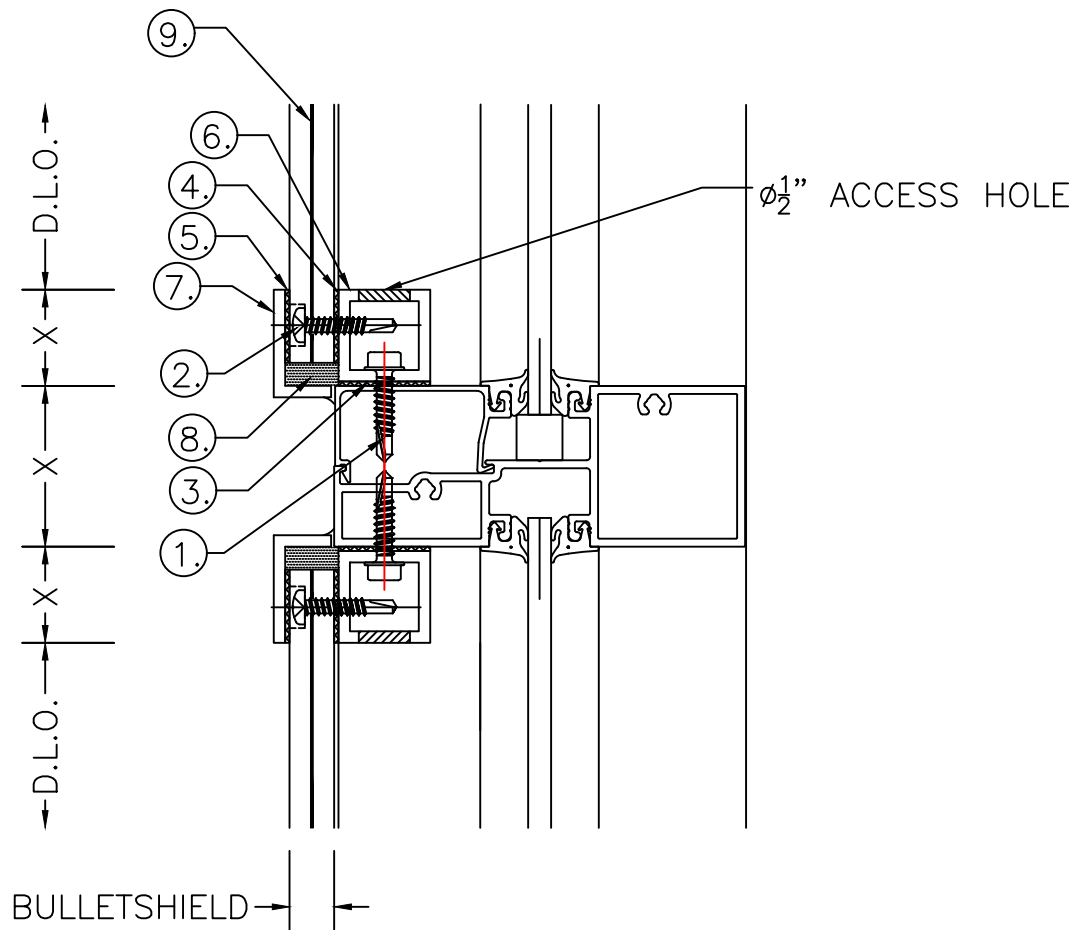

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSCHILD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

2 HORIZONTAL
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:



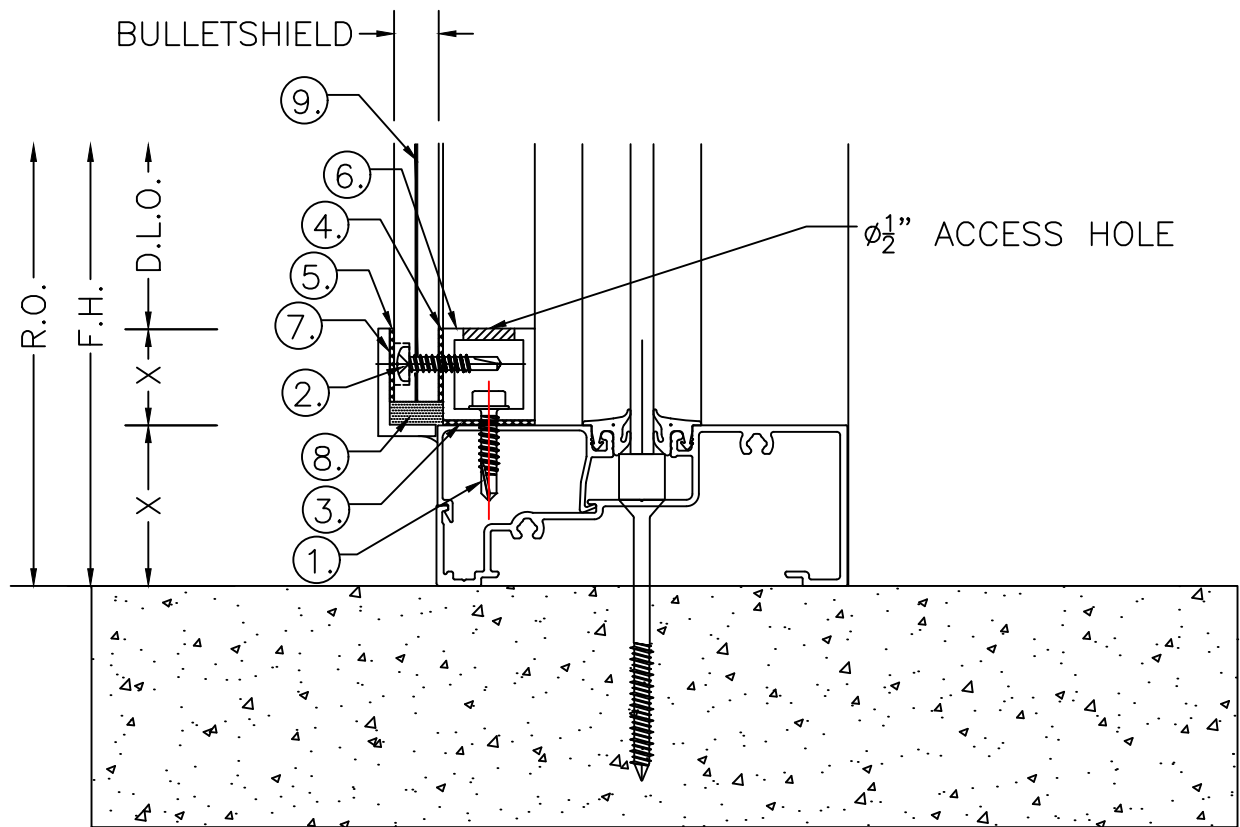

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.




VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

3
D.3

SILL

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

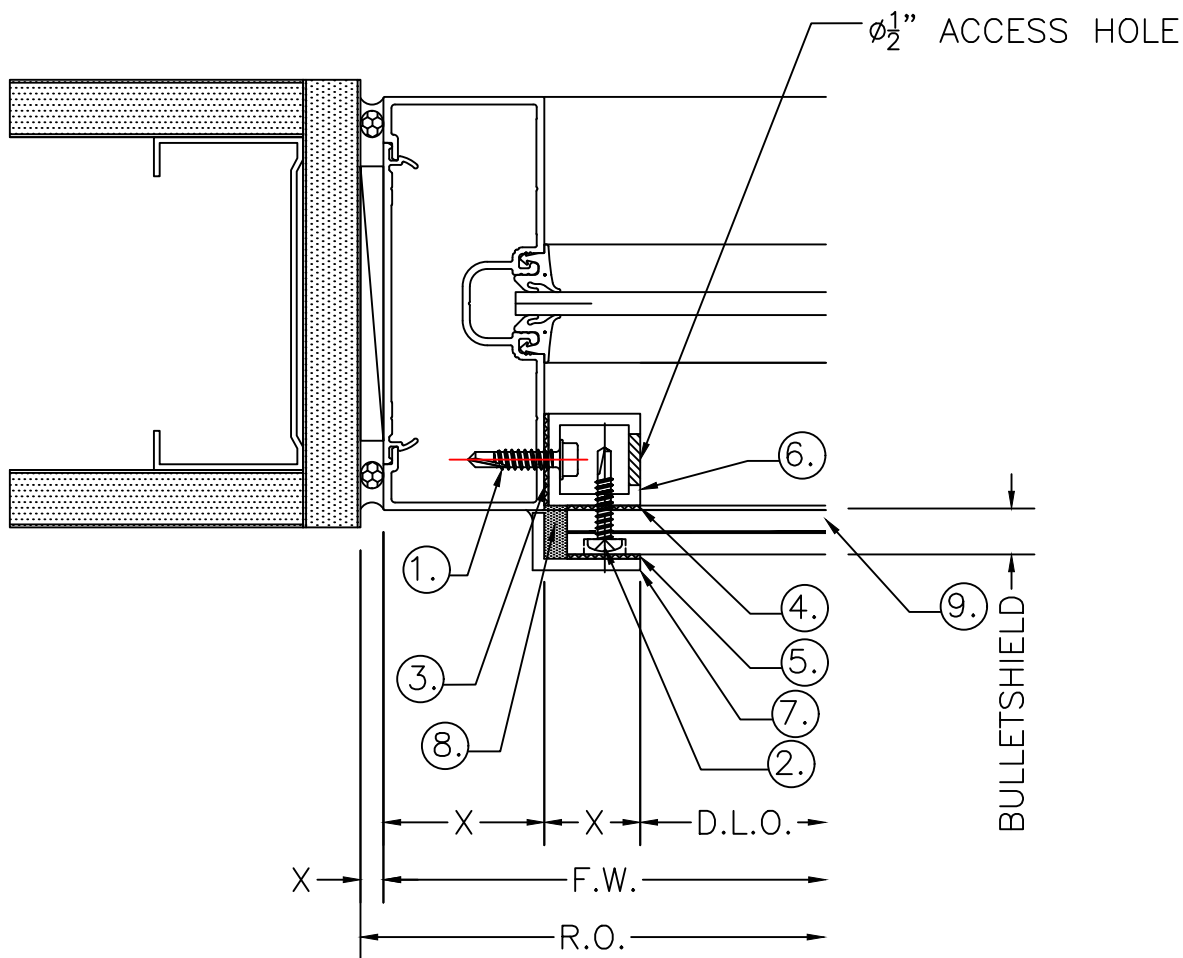

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 3/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLET SHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

4 JAMB
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

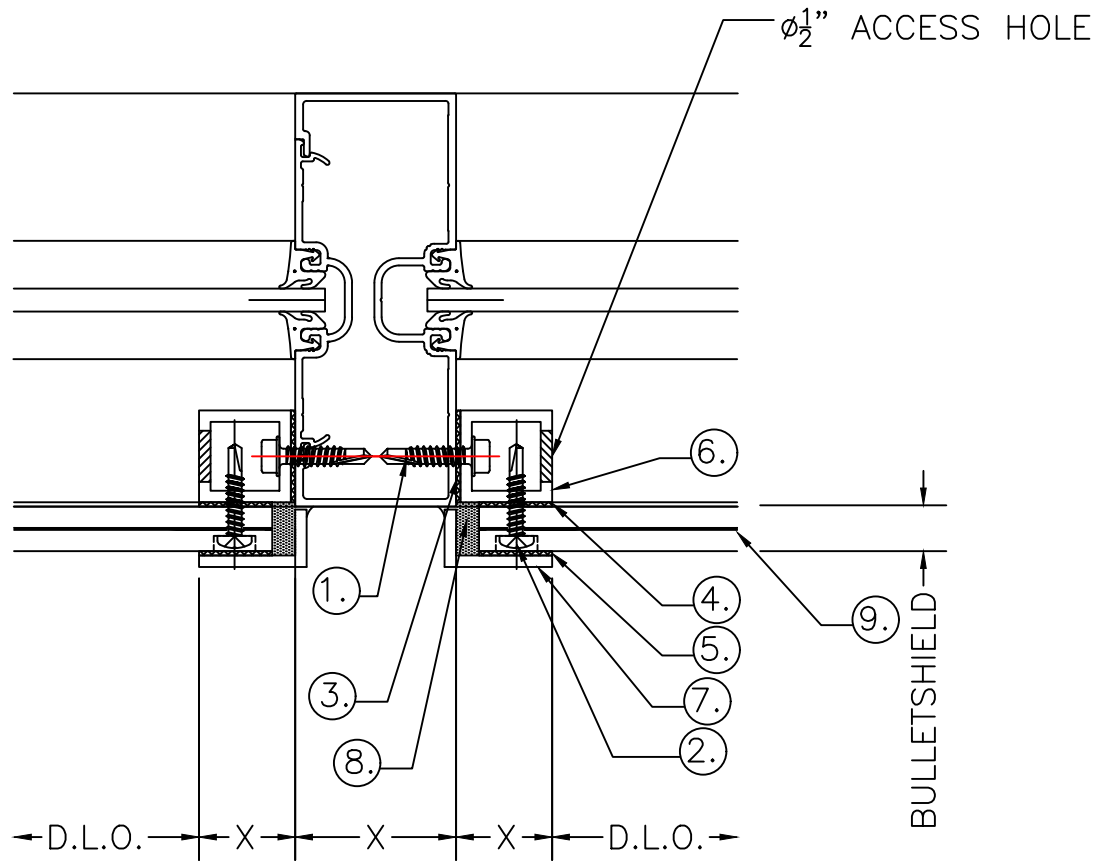

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW .500 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

5 VERTICAL
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

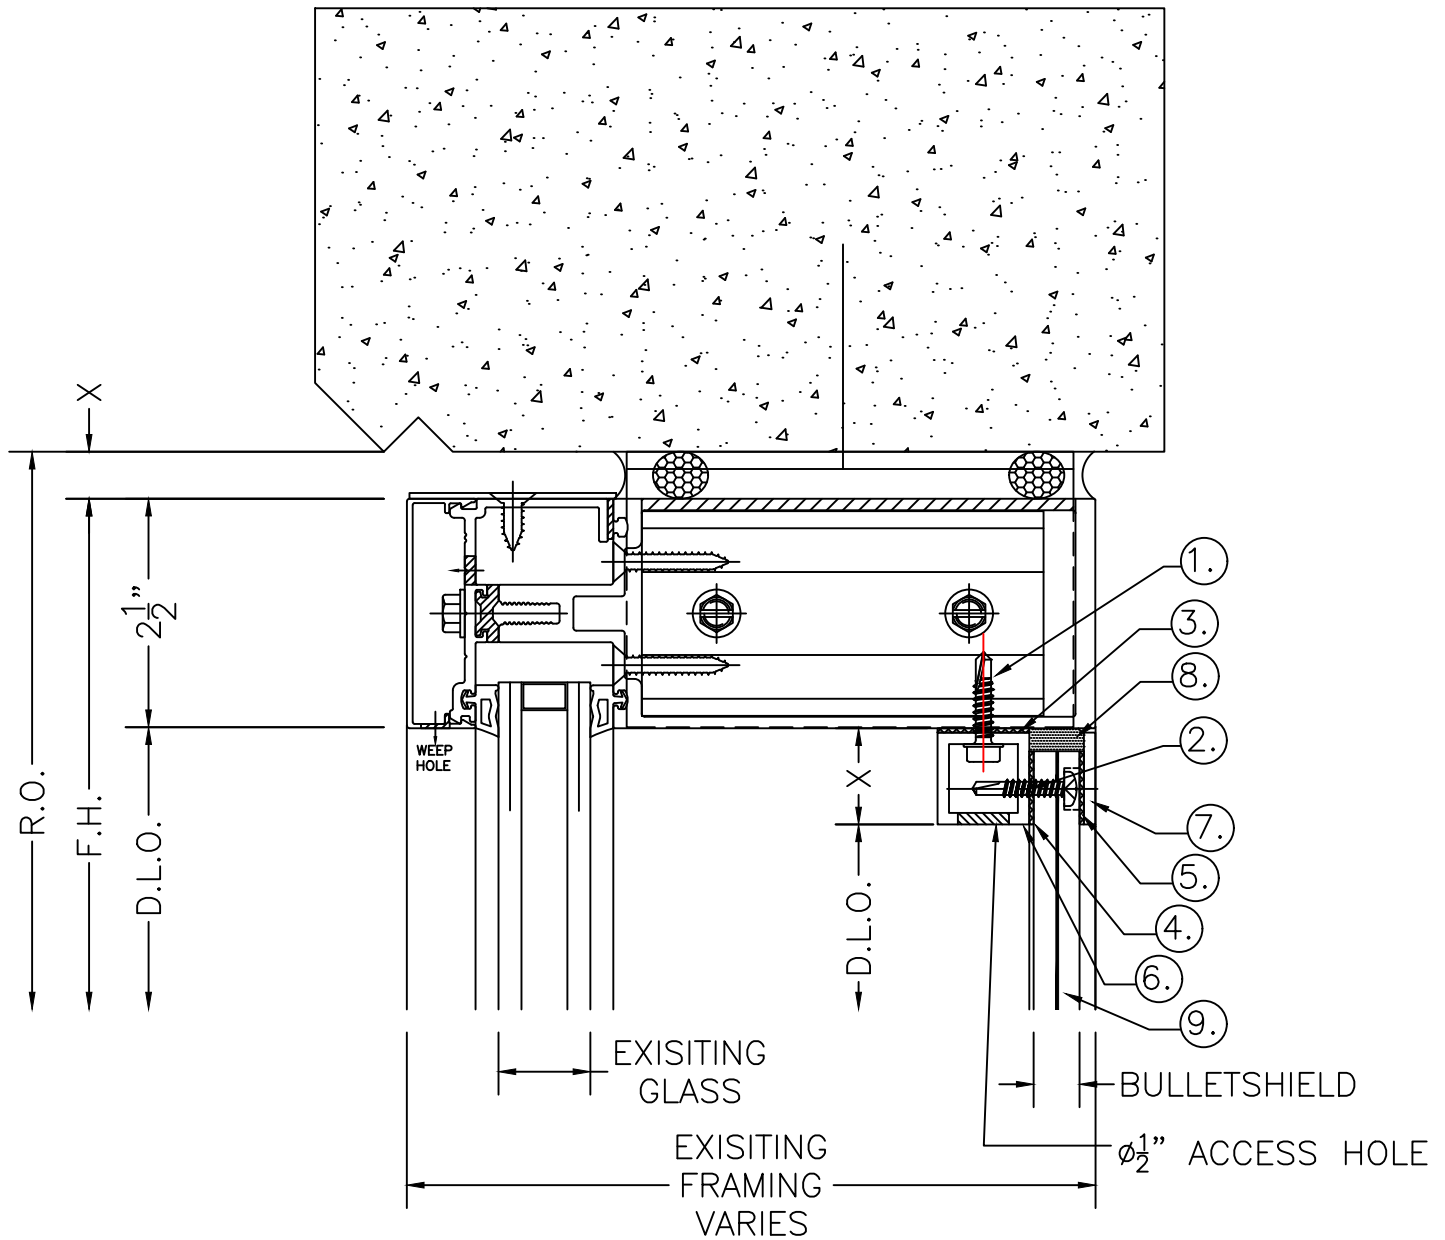

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW .500 BULLET SHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

1 HEAD
D.1 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

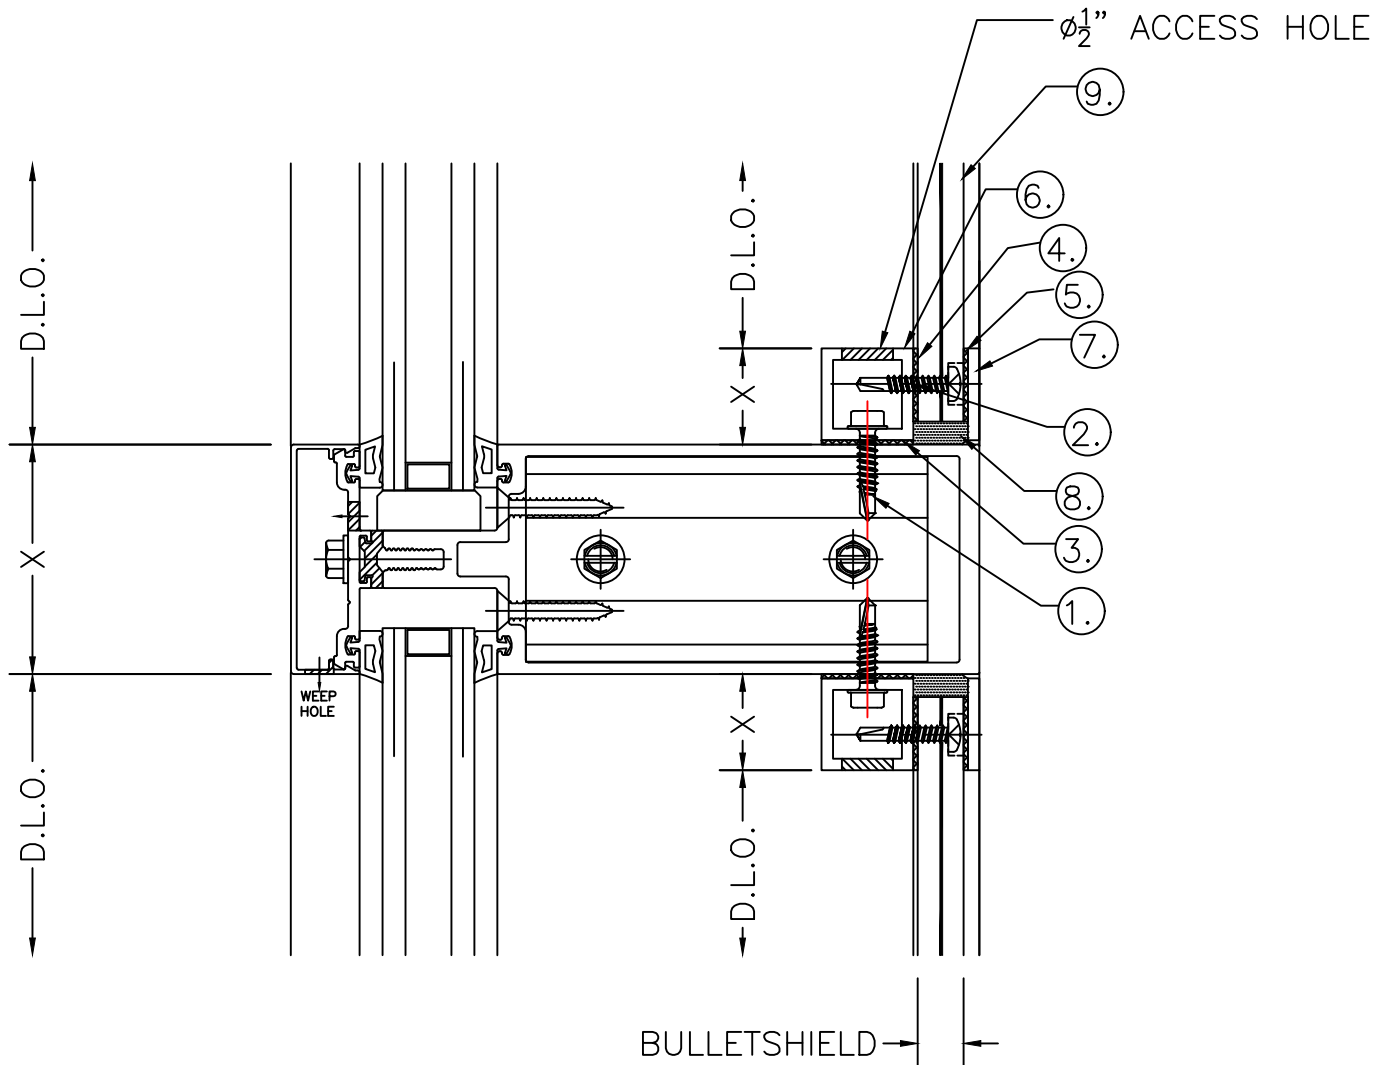

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW .500 BULLET SHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

2 HORIZONTAL
D.1 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

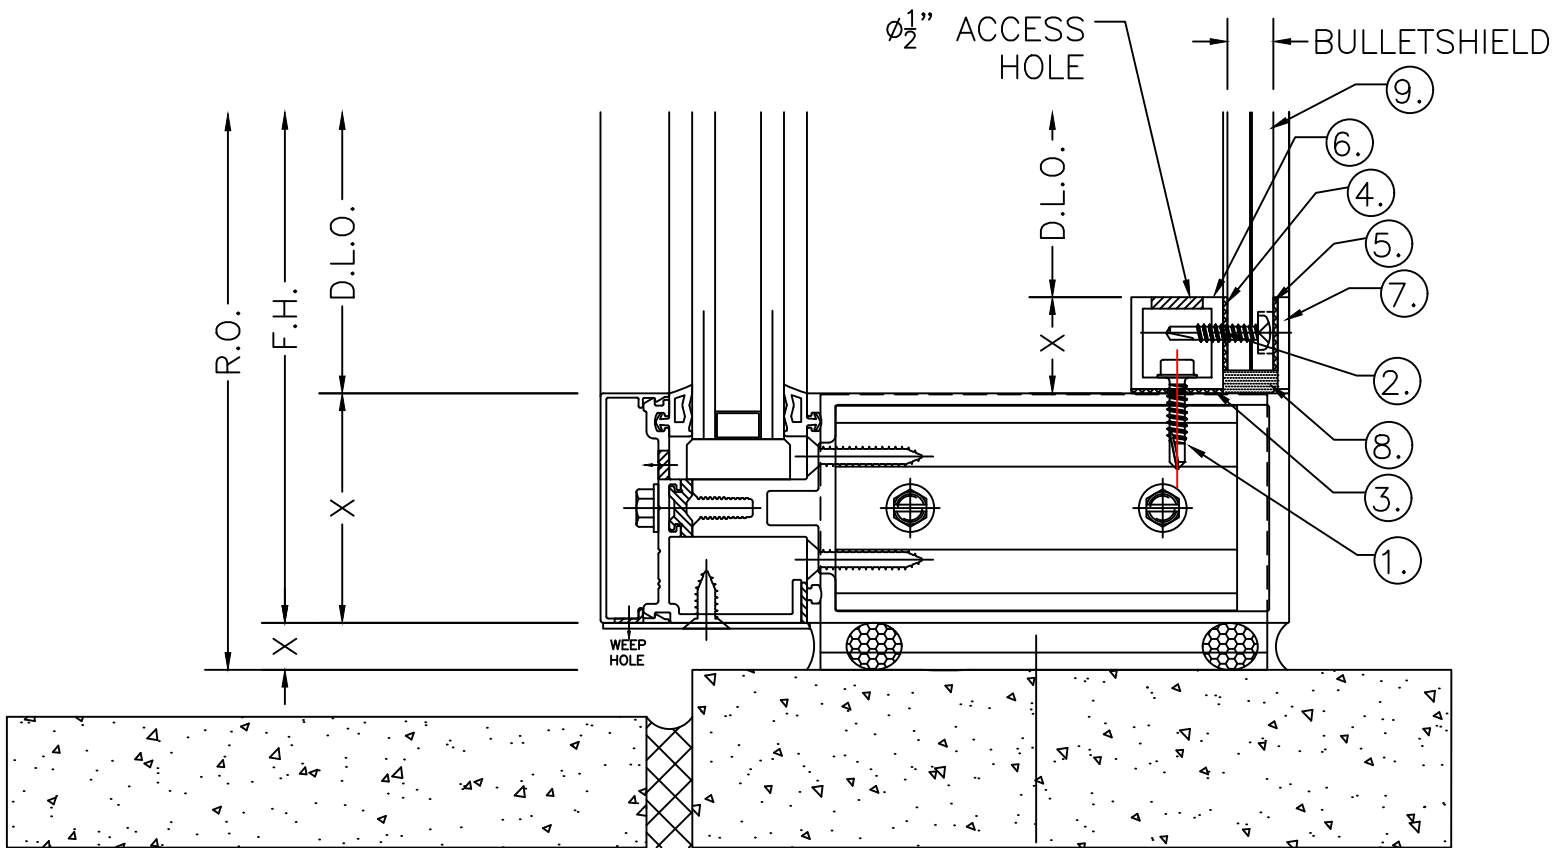

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW .500 BULLET SHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

3
D.1 SILL
ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

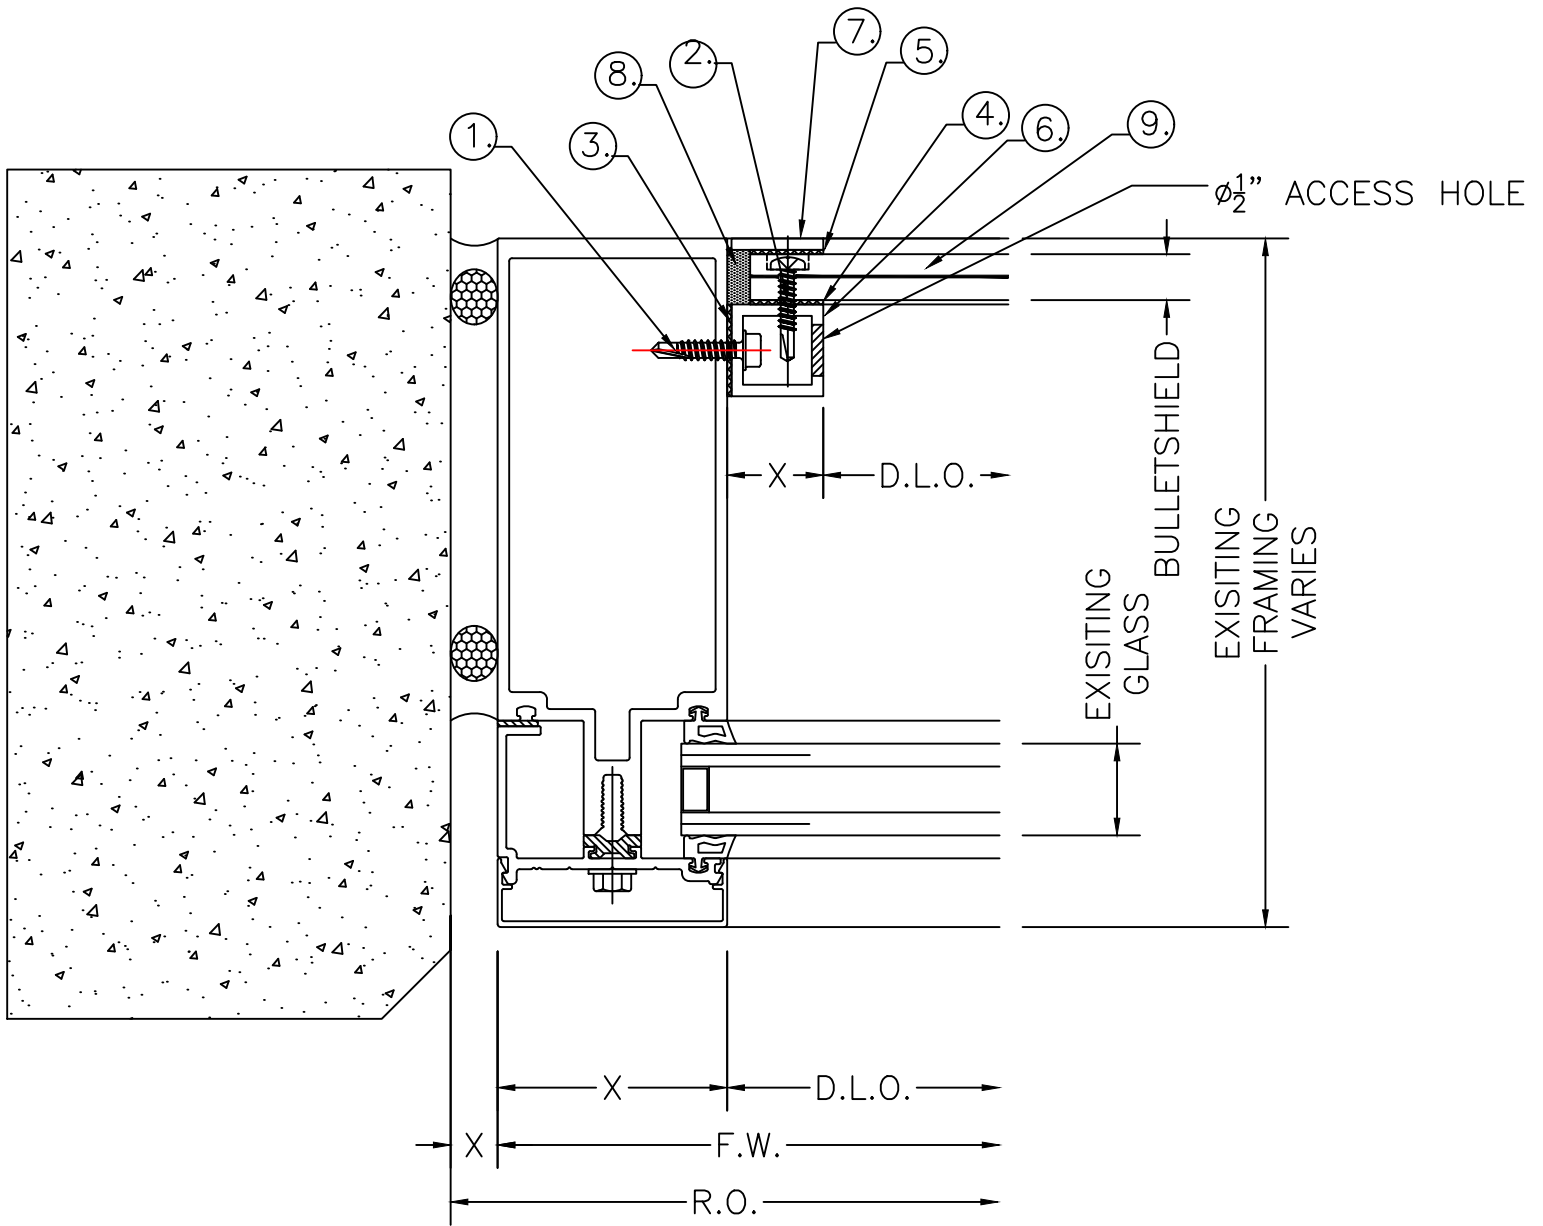

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW .500 BULLET SHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

4 JAMB
D.1 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

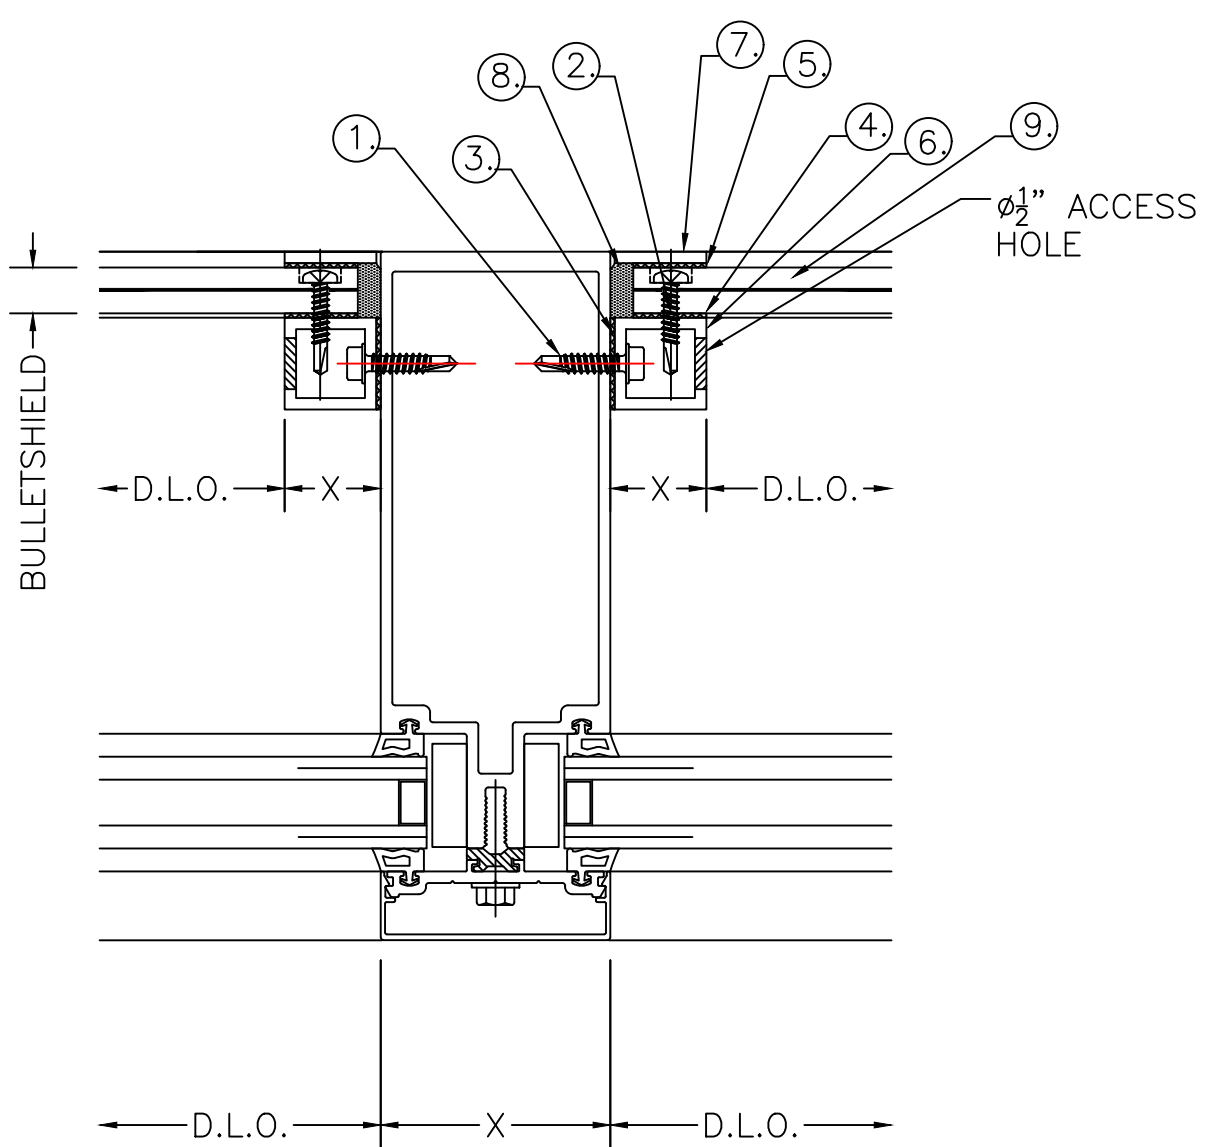

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x1" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN .500 BULLET SHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW .500 BULLET SHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW .500 BULLET SHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ .500 BULLET SHIELD
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

5 VERTICAL
D.1 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

