

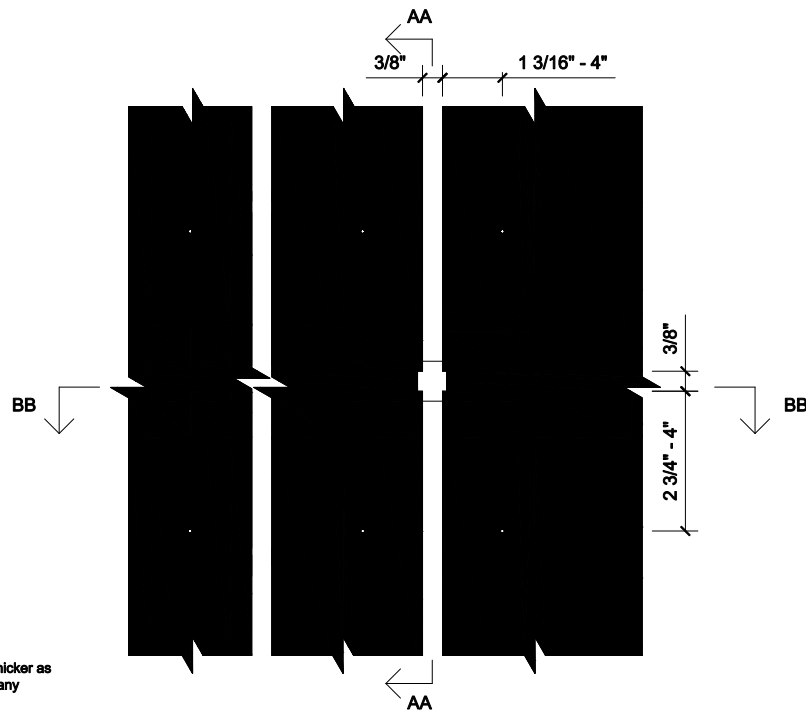


# EQUITONE EXPOSED FASTENER USING HORIZONTAL GIRT SYSTEMS ON STEEL STUD CONSTRUCTION

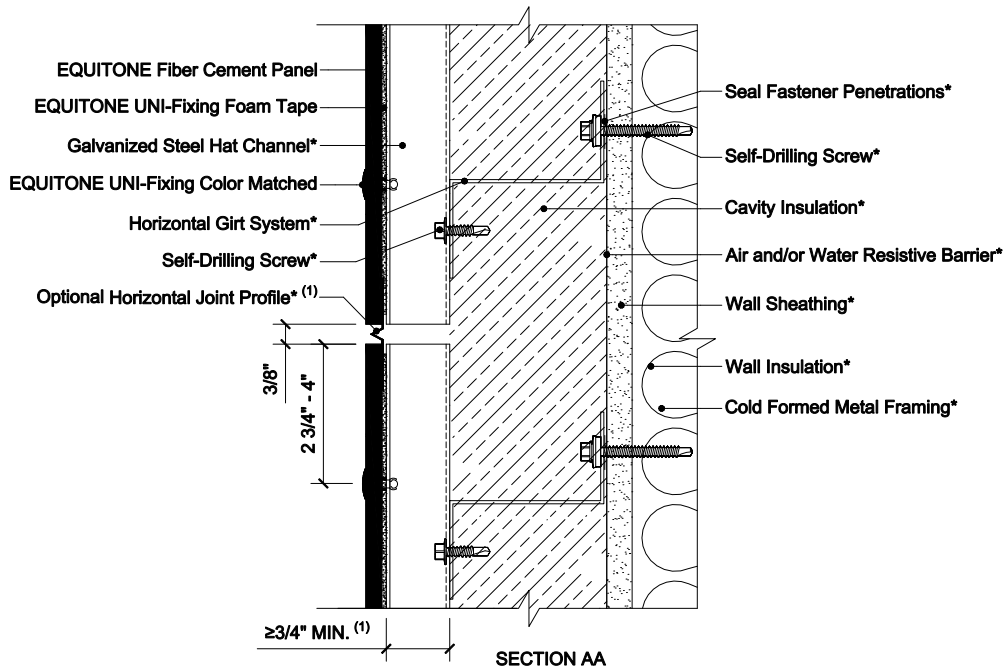

## NOTES:

1. Flashing used to close the joints may not be thicker as 1/32 in (23 gauge), including the thickness of any fastener heads.
2. Closing the horizontal joint may increase the minimum ventilation requirements. See EQUITONE Planning and Application Guide for more information.
3. Inlet/Outlet, air cavity, and closure perforation sizing should be modified, from those expressed herein, depending upon building height and/or local legislation. Visit the Planning and Application Guide - Face Fixing to Metal for additional information.
4. (\*) symbol represents materials not supplied by EQUITONE.

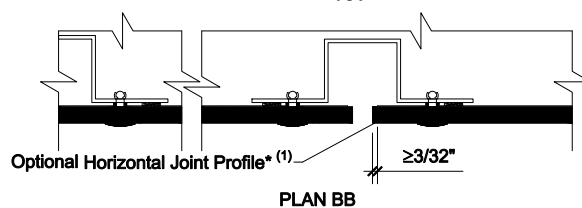

DETAIL #: EQ-EF-HG-SS-CHJ

RELEASE: 202412

REGION: NORTH AMERICA

WWW.EQUITONE.COM

BAFFLED HORIZONTAL  
JOINT DETAILS