


## EQUITONE EXPOSED FASTENER USING HORIZONTAL GIRT SYSTEMS ON STEEL STUD CONSTRUCTION

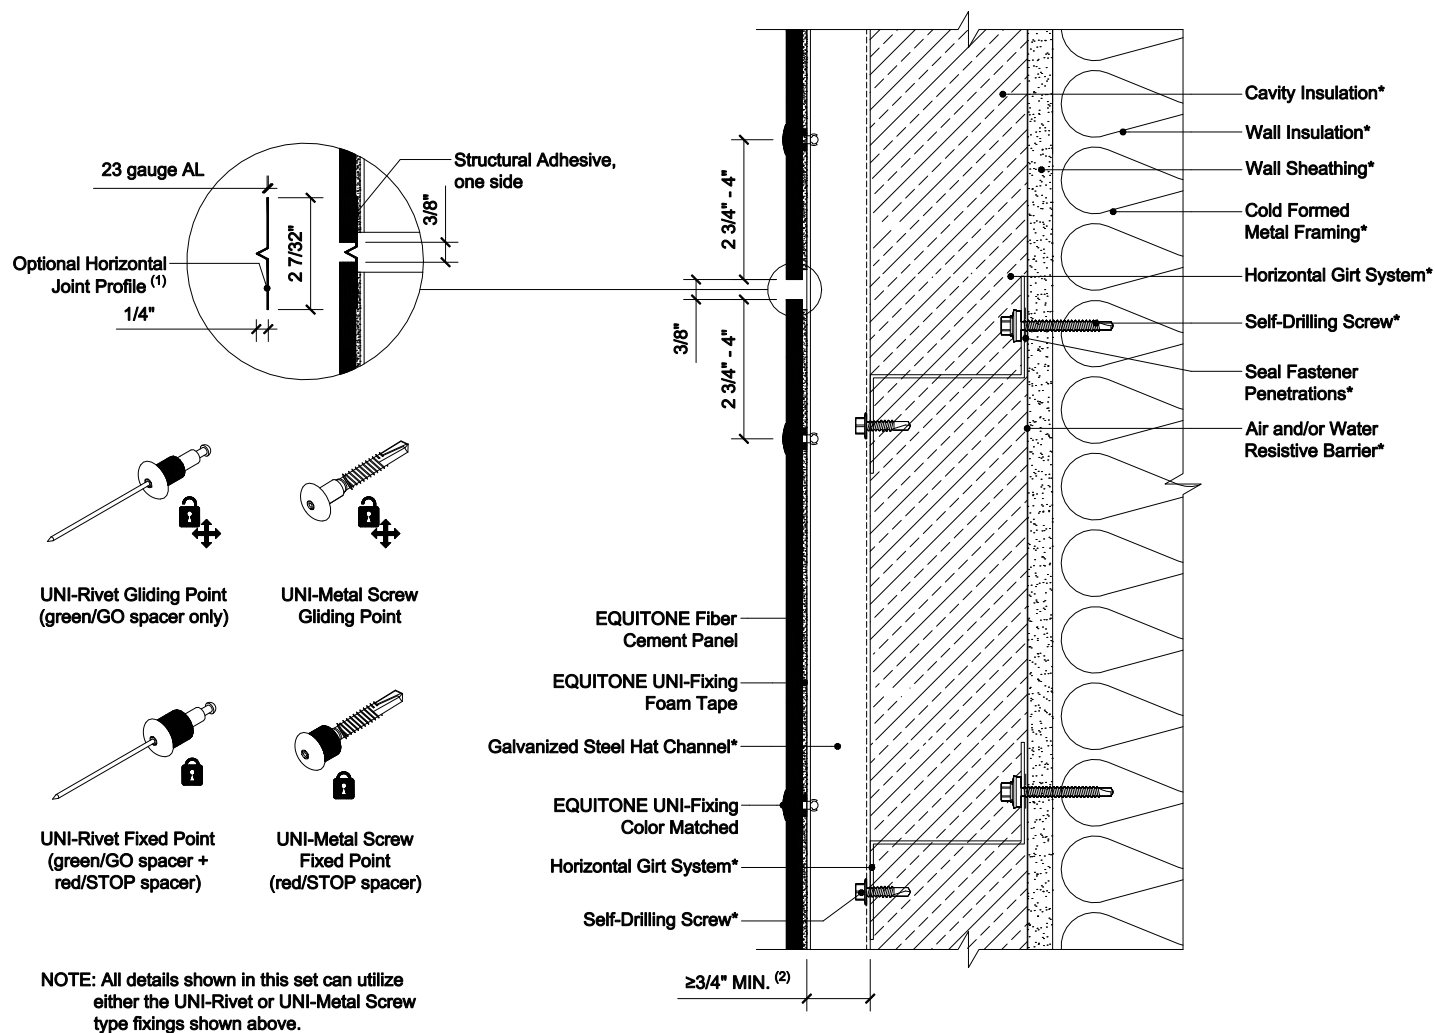

NOTES:

1. Flashing used to close the joints may not be thicker as 1/32 in (23 gauge), including the thickness of any fastener heads.
2. Inlet/Outlet, air cavity, and closure perforation sizing should be modified, from those expressed herein, depending upon building height and/or local legislation. Visit the Planning and Application Guide - Face Fixing to Metal for additional information.
3. (\*) symbol represents materials not supplied by EQUITONE.

DETAIL #: EQ-EF-HG-SS-FS
RELEASE: 202412
REGION: NORTH AMERICA
<a href="http://WWW.EQUITONE.COM">WWW.EQUITONE.COM</a>

## RELATION BETWEEN FIXED AND SLIDING POINTS