



"FS-90-3" BASE ROOF FLASH


PITCH	"A" ANGLE
1:12	95°
2:12	99°
3:12	104°
4:12	108°
5:12	113°




"FS-90-4" BASE ROOF FLASH



"FS-90-5" BASE TRIM

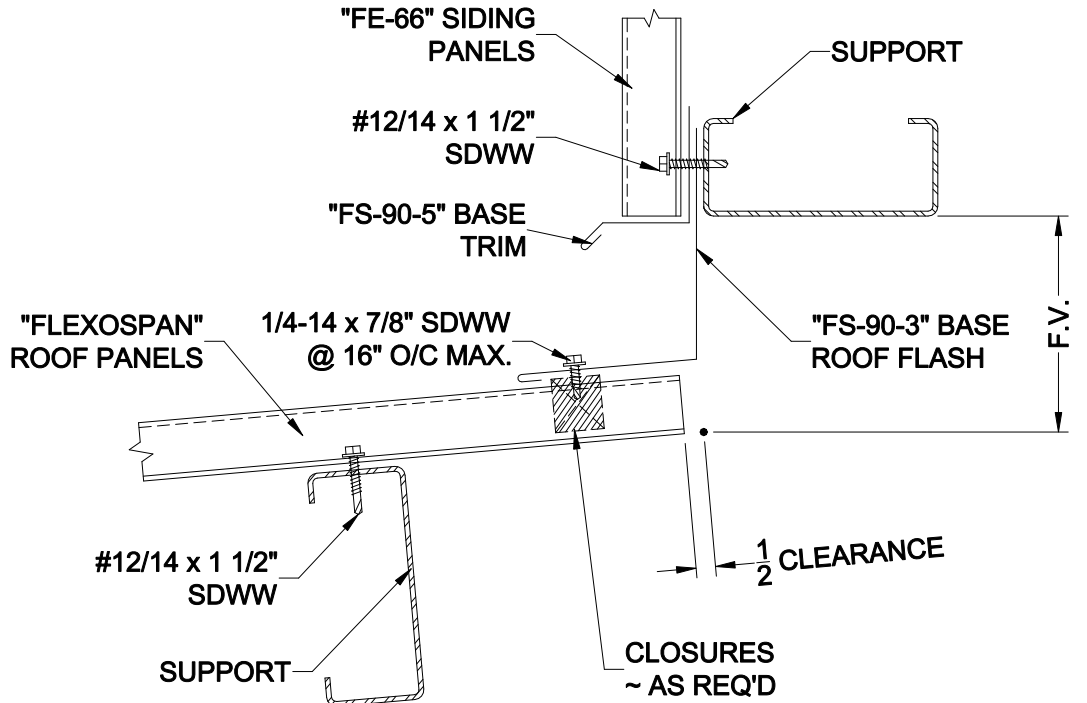

BASE ROOF (HALF RIDGE) DETAIL

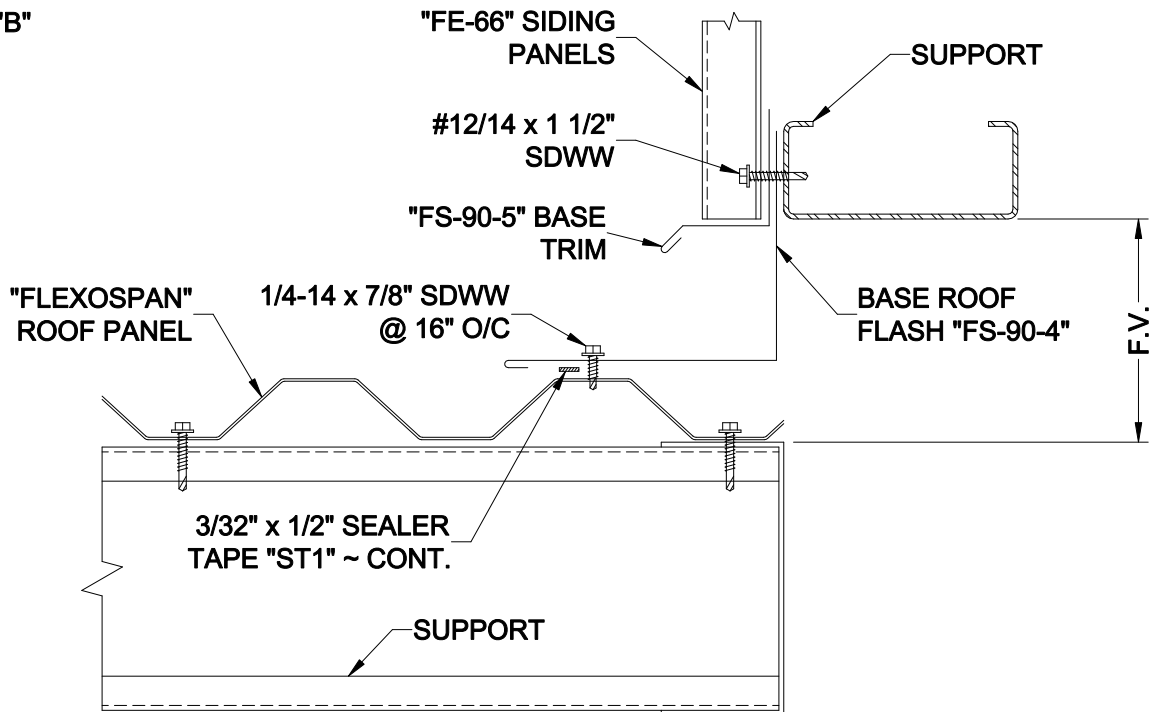

BASE ROOF DETAIL

ERECTOR NOTES:

1. ENDS OF BASE ROOF FLASH SHOULD BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND. FLASHING SHOULD BE STITCHED TOGETHER AT ENDS USING TWO 1/4-14 x 7/8" SDWW FASTENERS.
2. "A" & "B" DIMENSIONS VARY DUE TO CONSTRUCTION VARIATIONS.

BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"Fe-66" Concealed Fastener Panel	
Standard Details	
DRAWN BY: <u>rw</u>	DATE: <u>2/22/00</u>
CHECKED BY: <u>CANON</u>	DATE:

Base Roof Details
DRAWING NO. <u>FE66-6</u>