



MARK	PITCH	"A" DIM.
GT31	1:12	85°
GT32	2:12	80°
GT33	3:12	76°
GT34	4:12	72°
GT35	5:12	67°

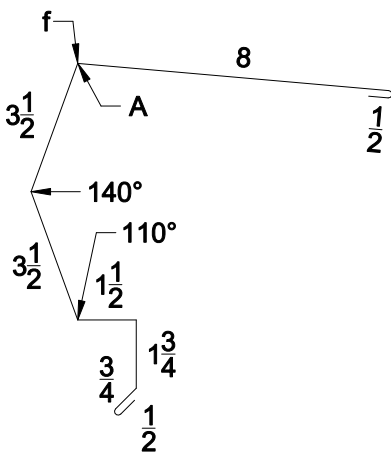

"GT3" HI-EAVE TRIM



"SS15-16" CEE CLOSURE

ERECTOR NOTES:

1. THE ENDS OF ALL ROOF PANELS TO BE PANNED PRIOR TO INSTALLING THE "SS15-16" CEE CLOSURES.
2. THE ENDS OF HIGH EAVE TRIM TO BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND.
3. "SS15-16" CEE CLOSURE TO BE FIELD CUT AND FORMED AS SHOWN ON PAGE "FSS15-6".

BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" Standing Seam Details		High Eave Detail
DRAWN BY: D.UREY	DATE: 9-27-05	DRAWING NO.
CHECKED BY:	DATE:	FSS15-16