


"SS3-01-2" CEE CLOSURE

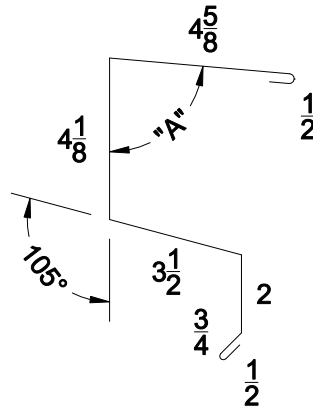

"SS3-05-1" HIGH EAVE TRIM

ERECTOR NOTES:

1. THE ENDS OF ALL ROOF PANELS TO BE PANNED PRIOR TO INSTALLING THE "SS3-01-2" CEE CLOSURES.
2. THE ENDS OF HIGH EAVE TRIM TO BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND.
3. "SS3-01-2" CEE CLOSURE TO BE FIELD CUT AND FORMED AS SHOWN ON PAGE "FSS316-6".

FLEXOSPAN
 BOX 515 RAILROAD STREET
 SANDY LAKE, PENNSYLVANIA 16145-0515
 PHONE: 800-245-0396 ° FAX: 724-376-3864

"Fss-316" Standing Segm Details		High Eave Detail
DRAWN BY: RW	DATE: 8/31/00	DRAWING NO.
CHECKED BY: CANON	DATE:	FSS316-17