


* 12, 14 OR 16 GAUGE GALVANNAEL

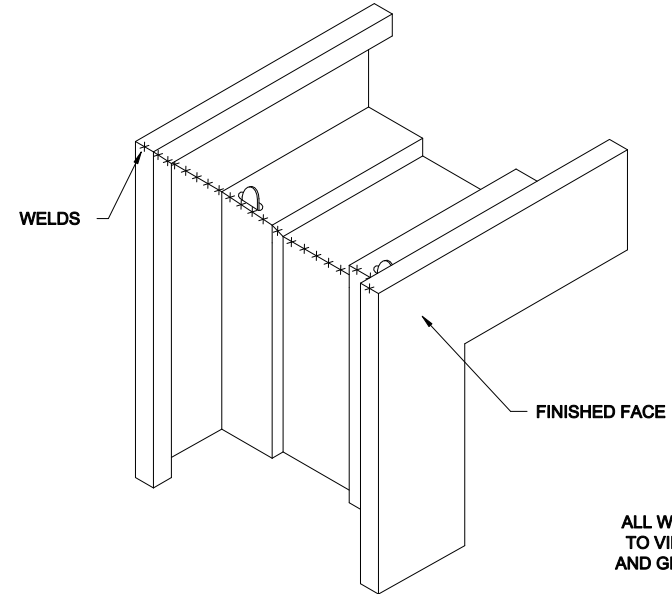

DETAIL "A"
OPTIONAL WELDED JOINT DETAIL
CONTINUOUS WELDED

ALL WELDS EXPOSED
 TO VIEW ARE FILLED
 AND GROUND SMOOTH

- * ALL WELDED FRAMES ARE FABRICATED WITH FLOOR ANCHORS AND WALL ANCHORS AS REQUIRED.
- * FRAMES ARE MORTISED, REINFORCED, DRILLED AND TAPPED IN OUR FACTORY TEMPLATED MORTISE HARDWARE.
- * ALL FRAMES ARE SHIPPED WITH A TEMPORARY STEEL SPREADER TACK WELDED TO BOTTOM OF EACH JAMB. THIS SPREADER JAMB IS A SUPPORT USED FOR SHIPPING PURPOSES ONLY. THE STEEL SPREADER IS TO BE REMOVED AT THE JOBSITE BEFORE INTALLING THE FRAME.
- * 9/32" SILENCER (MUTE) HOLES ARE PROVIDED: SINGLE SWING 3 HOLES IN STRIKE JAMB
 PAIR SWING TWO HOLES IN HEAD
- * U.L. LABELS WHEN REQUIRED ARE APPLIED TO THE HINGE JAMB RABBIT, BELOW THE TOP HINGE. (WHEN A CONTINUOUS HINGE IS REQUIRED THE U.L. LABEL WILL BE APPLIED IN THE HEAD RABBIT, NEAR THE HINGE JAMB).
- * MORTAR (PLASTER) GUARDS ARE PROVIDED FOR ALL HARDWARE MORTISES FOR FRAMES TO BE INSTALLED IN CONCRETE OR MASONRY OPENINGS.
- * FRAMES ARE REINFORCED ONLY FOR SURFACE APPLIED HARDWARE, ALL DRILLING AND TAPPING TO BE DONE BY OTHERS