


* $\frac{1}{8}$ " ϕ POP RIVET @ 3'-0" O.C. MAX.
 REQUIRED ON FIRE SIDE OF PANELS.
 (#6-20 X $\frac{3}{8}$ " SELF DRILLER CAN BE
 USED AS AN ALTERNATIVE FASTENER)

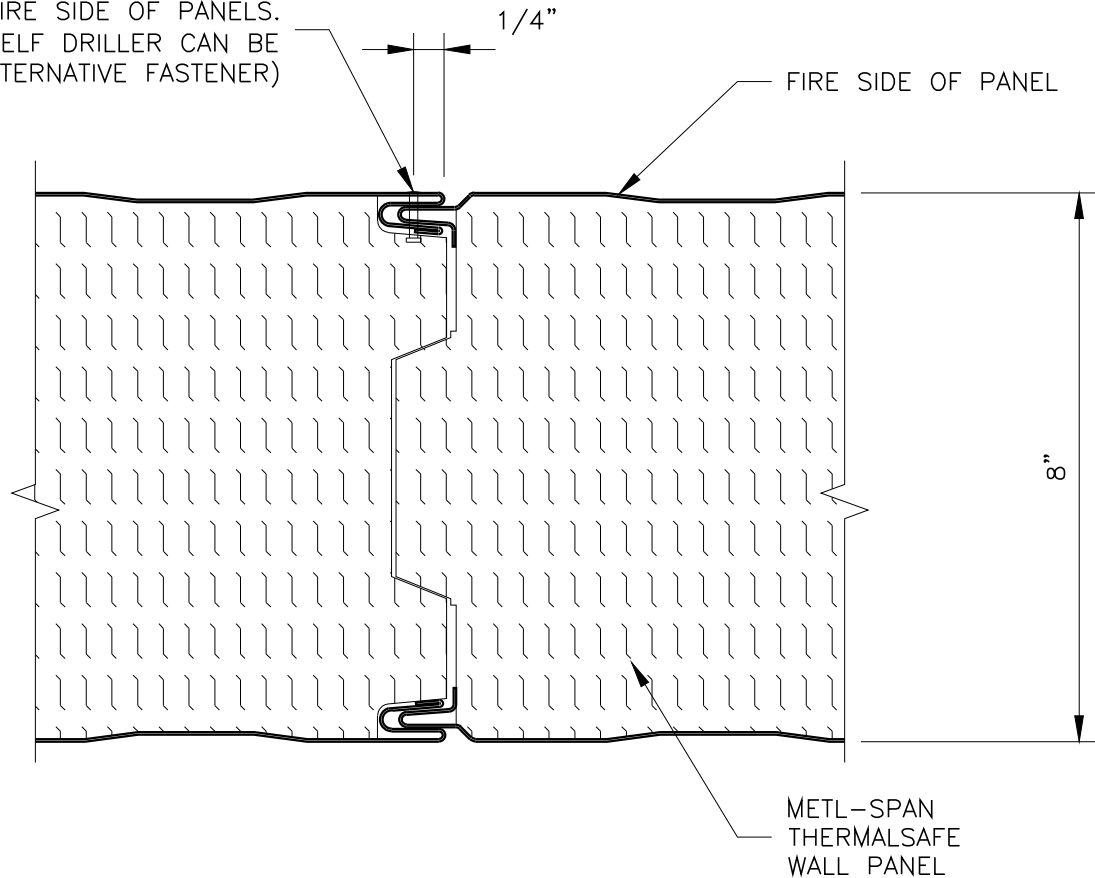

PANEL JOINT FASTENING

***IMPORTANT:**
 REQUIRED ONLY ON THE FIRE SIDES OF 3 HR. FIRE
 RESISTANCE RATED 8" THICK THERMALS SAFE PANELS

COMMERCIAL AND
 INDUSTRIAL

3 HR. FIRE RATING JOINT FASTENING
 8" THERMALS SAFE PANEL

TSW10001
 DATE: Nov. 9, 2016