


1: CUT MINIMUM 6" (152 MM) GE ELEMEX SS FLASHING SHEET TO APPROPRIATE LENGTH AND SHAPE, ADHERE IN THE FOLLOWING ORDER:

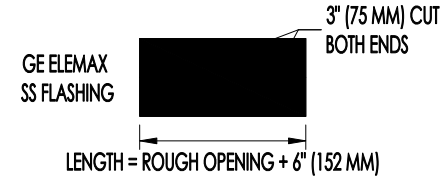

- 1A: APPLY GE ELEMEX SS FLASHING SHEET TO THE SILL AREA CENTERED OVER CHANGE OF PLANE. FOLD THE CUT SEGMENTS UP INSIDE THE CORNERS.
- 1B: APPLY GE ELEMEX SS FLASHING SHEET TO THE JAMB AREAS CENTERED OVER CHANGE OF PLANE AND OVERLAPPING THE GE ELEMEX SS FLASHING SHEET IN THE BOTTOM CORNERS.
- 1C: APPLY GE ELEMEX SS FLASHING SHEET TO THE HEADER CENTERED OVER CHANGE OF PLANE AND OVERLAPPING THE GE ELEMEX SS FLASHING SHEET IN TOP CORNERS.
- 2: APPLY/TOOL GE ELEMEX 5000 LIQUID FLASHING TO CORNERS/EDGES TO ENSURE SEAMLESS COVERAGE. IF A NON-SILICONE SEALANT IS BEING USED TO SEAL WINDOW PERIMETER, ENSURE GE ELEMEX 5000 LIQUID FLASHING IS NOT APPLIED WITHIN A SEALANT JOINT PATH.
- 3: ENSURE GE ELEMEX 2600 AWB EXTENDS A MINIMUM 2" (50 MM) ONTO GE ELEMEX SS FLASHING. GE ELEMEX 5000 MAY ALSO BE UTILIZED TO SEAL EDGE OF FLASHING.

**NOTES:**

- ENSURE ROUGH OPENING ARE DRY, CLEAN AND FREE OF DIRT, DEBRIS AND CONTAMINANTS.
- GE ELEMEX SS FLASHING SHOULD BE INSTALLED BEFORE THE APPLICATION OF GE ELEMEX 2600 AWB OVER WALL SUBSTRATE AND GE ELEMEX 5000 LIQUID FLASHING AT SHEATHING JOINT LOCATIONS.
- GE ELEMEX SS FLASHING SHEET SHOULD BE INSTALLED IN MANAGEABLE SEGMENTS. ENSURE GE ELEMEX SS FLASHING SHEET SEGMENTS OVERLAP BY A MINIMUM 2" (50 MM).
- SEE GE ELEMEX 2600 AWB DATA SHEET FOR LIST OF ADDITIONAL ACCEPTABLE GE SEALANTS/LIQUID FLASHING.

**ROUGH OPENING – METHOD C: GE ELEMEX SS FLASHING SHEET  
GE ELEMEX® 2600 AIR AND WATER-RESISTIVE BARRIER SYSTEM**

**DETAIL #:** AWB-07

THE ABOVE DETAIL IS FOR ILLUSTRATION PURPOSES ONLY. IT IS INTENDED AS A GUIDELINE TO ASSIST MOMENTIVE PRODUCT USERS IN DEVELOPING PROJECT SPECIFIC DETAILS. CONSULT APPROPRIATE SPECIFICATION DOCUMENTS, DATA SHEETS, BUILDING CODES AND ANY OTHER INFORMATION DEEMED NECESSARY FOR SPECIFIC REQUIREMENTS. MOMENTIVE PRODUCT USERS ARE RESPONSIBLE FOR DETERMINING THE SUITABILITY OF MOMENTIVE PRODUCTS FOR THE PARTICULAR APPLICATION AND ALL RELATED PROJECT DETAILS. MOMENTIVE MAKES NO WARRANTY, EXPRESS OR IMPLIED, WITH RESPECT TO THE PERFORMANCE, SUITABILITY OR FITNESS FOR INTENDED USE OF ITS PRODUCTS IN ANY USER'S APPLICATION. ANY SALE OF PRODUCTS OR DELIVERY OF CUSTOMER SUPPORT AND ADVICE BY MOMENTIVE PERFORMANCE MATERIALS INC. AND/OR ANY OF ITS AFFILIATES ("MOMENTIVE") IS MADE EXCLUSIVELY UNDER MOMENTIVE'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE AT [WWW.GE.COM/SILICONES](http://WWW.GE.COM/SILICONES).

**SCALE:** N.T.S.

**DATE:** 2017-03-27