

Boral Steel® Architectural Details are divided into three (3) categories based on the install method used:

Architectural details provided for Boral Steel® customers only


BATTEN (Panel is exposed fastened & mounted onto a wood 2x2 batten or steel hat channel)

DIRECT (Panel is exposed fastened & mounted Direct-to-the roof-deck)

GRANITE-RIDGE Shingle (Panel is hidden fastened & mounted Direct-to-the roof-deck)

Boral Steel VALLEY 2 PC:

1. Install underlayment, per prevailing building code.
2. install two (2) pieces of valley flashing (one each side of valley)
3. Fasten both sides at 24" O.C. minimum, with neoprene washered screws
4. install EmSeal expandable tape into valley channel
5. cut panel to valley angle, allow $\frac{1}{4}$ " to $\frac{1}{2}$ " from inner edge
6. Install Boral Steel Panels into valley trough
7. Cover center joint with self-adhered waterproofing strip
8. Install Valley Center Cover

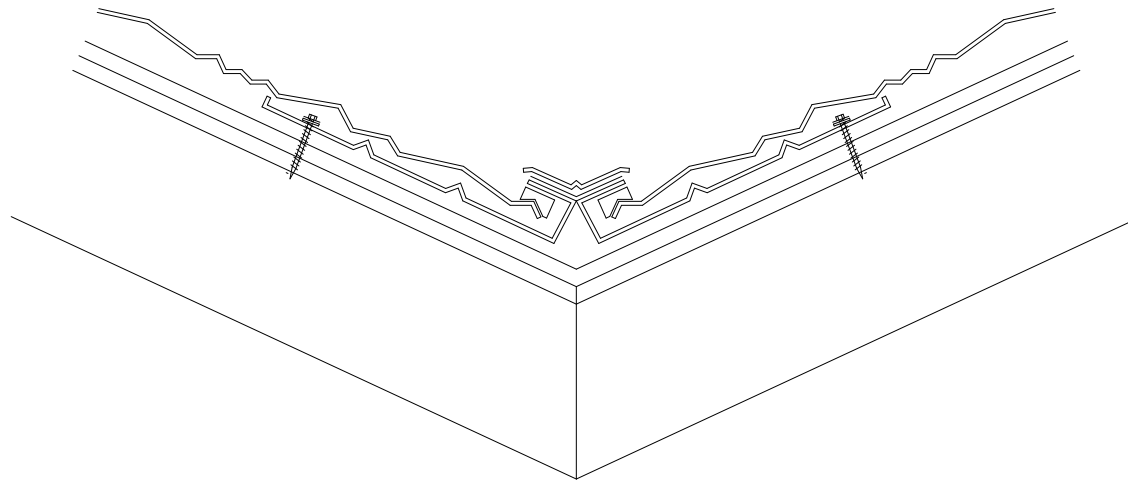

Profiles:

PINE-CREST Shake

BARREL-VAULT Tile

PACIFIC Tile

COTTAGE Shingle

**Direct
VALLEY 2-Piece**

Boral Steel Stone Coated Roofing
7575 Irvine Ctr Dr Suite 100, Irvine, CA 92618

Drawings
are not to
scale