




2 TENDON SPACING

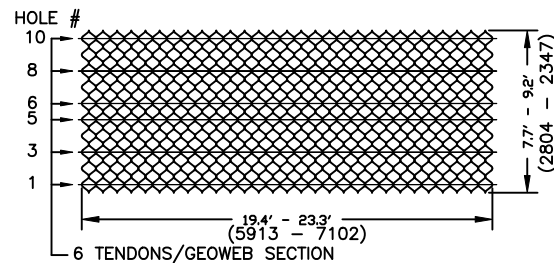


6 TENDON SPACING

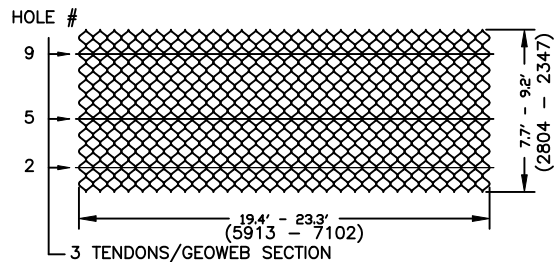


3 TENDON SPACING

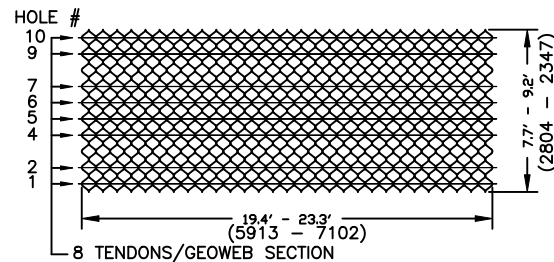


8 TENDON SPACING

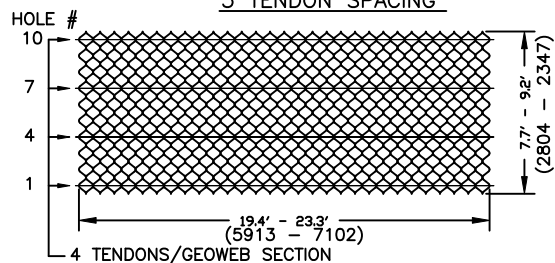

4 TENDON SPACING

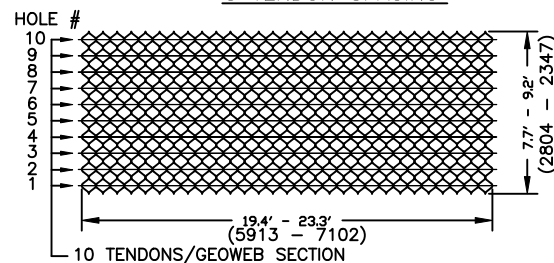

10 TENDON SPACING

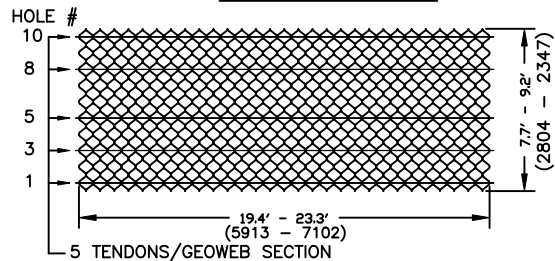

5 TENDON SPACING

STEP 1: INSERT THE LOCKING MEMBER OF THE ATRA TENDON CLIP THROUGH THE I-SLOT IN THE CELL WALL. TURN THE CLIP 90 DEGREES TO LOCK.

STEP 2: PULL A FEW INCHES OF TENDON THROUGH THE CIRCULAR OPENING IN THE ATRA TENDON CLIP.

STEP 3: PULL THE TENDON UP AND OVER THE POST OF THE ATRA TENDON CLIP.

STEP 4: TWIST THE TENDON TO FORM A LOOP.

STEP 5: FOLD THE TENDON LOOP BACK DOWN OVER THE POST.

STEP 6: PULL THE TENDON SO THE SLACK IS ELIMINATED AND IT IS TIGHTLY SECURED TO THE CLIP.

TYPICAL TENDON TIE OFF DETAIL

PRESTO[®] PRODUCTS CO.
670 NORTH PERKINS STREET
APPLETON, WI 54914
920-738-1328
WWW.PRESTOGEOWEB.COM

THIS DRAWING IS COPYRIGHTED AND BASED UPON THE USE OF GENUINE GEOWEB MANUFACTURED BY PRESTO GEOSYSTEMS. ANY USE OF THIS DRAWING FOR ANY PRODUCT OTHER THAN THAT MANUFACTURED BY PRESTO GEOSYSTEMS IS STRICTLY PROHIBITED.

GENUINE GEOWEB[®]
GW20V TENDON DETAILS

PRESTO, GEOWEB, AND ATRA ARE REGISTERED TRADEMARKS[®] OF PRESTO PRODUCTS.

DATE	JUNE 2013	FILE NAME	GWGEN7F.DWG
SCALE	NTS	SHEET	1

© 2010 PRESTO GEOSYSTEMS