| DOOR NUMBER | QTY | OPENING | | ACTUAL | | MODEL | JAMB | | | MOUNTING | | LOCK | PANELS WIDE | PANELS HIGH | SECTION NUMBER OPEN FOR GLASS | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | WIDTH | HEIGHT | WIDTH | HEIGHT | | W | S | M | ANGLE | BRKT | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |

JOB:

DISTR:

CONTR:

ARCH:

RAYNOR

NR: 2904930

☐ Commercial TradeMark– 2" Thick, 24–Gauge Exterior

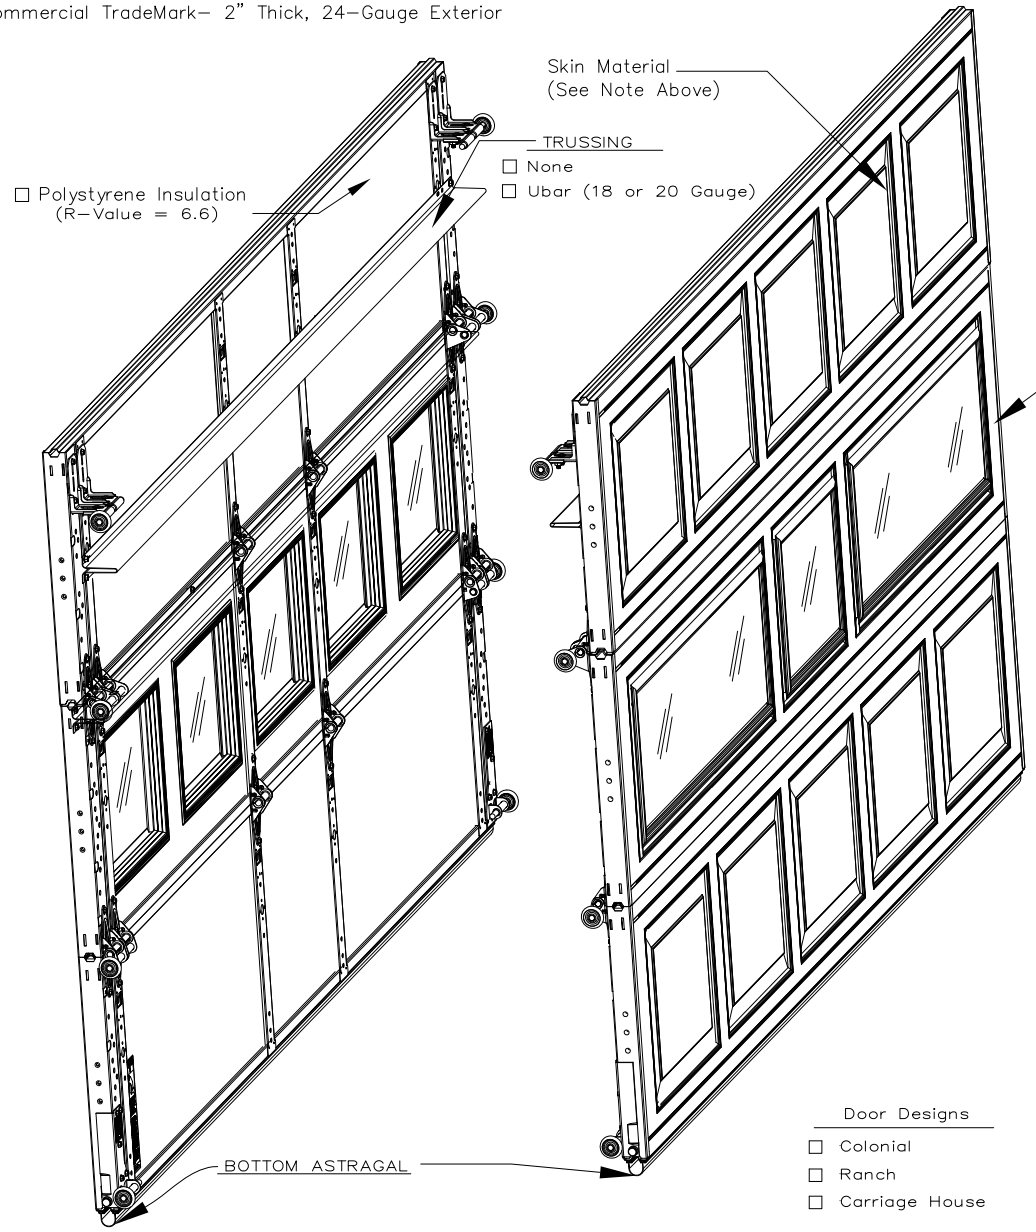


EXTERIOR COLOR
- ☐ White
- ☐ Almond
- ☐ ClayTone
- ☐ Desert Tan
- ☐ OptiFinish

Colonial Styles
- ☐ Plain Colonial
- ☐ Sunburst
- ☐ Stockton
- ☐ Cascade
- ☐ Sherwood
- ☐ Cathedral

Ranch Styles
- ☐ Plain Ranch
- ☐ Sunburst
- ☐ Stockton
- ☐ Cascade
- ☐ Sunray

☐ Interior Locking – spring loaded slide bolt engages slot in track. operable from inside only – may be mounted either side

☐ Locking – omitted.

Locks should not be supplied with an electric operated door without a lock interlock switch.

Door Designs
- ☐ Colonial
- ☐ Ranch
- ☐ Carriage House

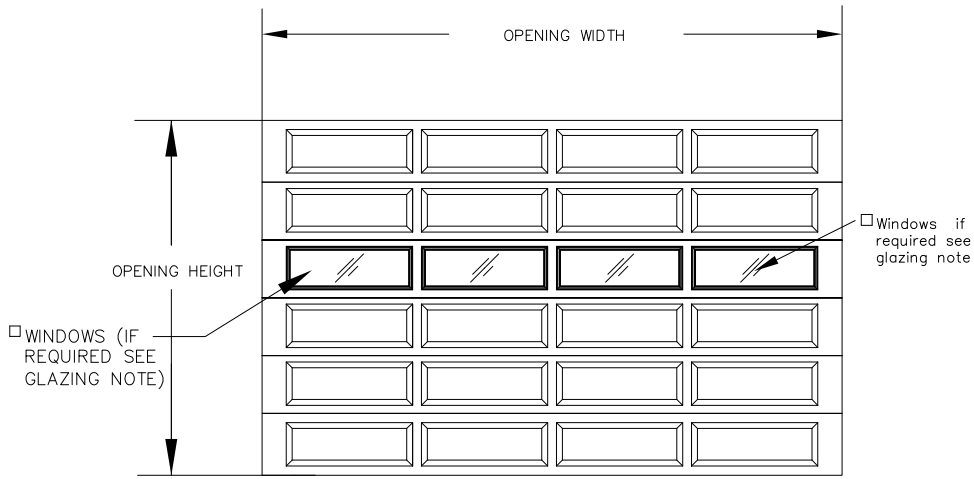

| DOOR NUMBER | QTY | OPENING WIDTH | OPENING HEIGHT | ACTUAL WIDTH | ACTUAL HEIGHT | MODEL | JAMB W | JAMB S | JAMB M | MOUNTING ANGLE | MOUNTING BRKT | LOCK | PANELS WIDE | PANELS HIGH | SECTION NUMBER OPEN FOR GLASS 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |

JOB:

DISTR:

CONTR:

ARCH:

NR: 2904930

TABLE #1
PANEL CHART

| Number of Panel | Door Width +/- 1/16" | End Stile Width +/- 1/8" | Mutt Spacing +/- 1/16" | Dim "A" +/- 1/8" |
|---|---|---|---|---|
| 2 | 4 3/8 | 2.75 | 3.00 | 42.875 |
| | 5 11 3/16 | 14.156 | | 42.875 |
| 3 | 5 11 5/16 | 2.75 | 3.00 | 65.813 |
| | 7 10 1/8 | 14.156 | | 65.813 |
| 4 | 7 10 1/4 | 2.75 | 3.00 | 88.75 |
| | 8 1 1/8 | 4.1875 | | 88.75 |
| 4 | 8 1 1/4 | 2.75 | 4.00 | 91.75 |
| | 9 10 1/16 | 13.156 | | 91.75 |
| 5 | 9 10 3/16 | 2.75 | 3.25 | 112.69 |
| | 11 8 | 13.656 | | 112.69 |
| 6 | 11 8 1/8 | 2.75 | 3.00 | 134.63 |
| | 13 6 15/16 | 14.156 | | 134.63 |
| 7 | 13 7 1/16 | 2.75 | 3.00 | 157.56 |
| | 14 5 7/16 | 7.9375 | | 157.56 |
| 7 | 14 5 9/16 | 2.75 | 4.75 | 168.06 |
| | 15 5 7/8 | 8.9063 | | 168.06 |
| 8 | 15 6 | 2.75 | 3.00 | 180.5 |
| | 16 9 5/8 | 10.563 | | 180.5 |
| 8 | 16 9 3/4 | 2.75 | 5.25 | 196.25 |
| | 18 4 13/16 | 12.281 | | 196.25 |
| 9 | 18 4 15/16 | 2.75 | 4.50 | 215.44 |
| | 19 3 3/4 | 8.1563 | | 215.44 |
| 10 | 19 3 7/8 | 2.75 | 3.00 | 226.38 |
| | 20 2 | 7.8125 | | 226.38 |

TABLE #2
Panel Layout CHART

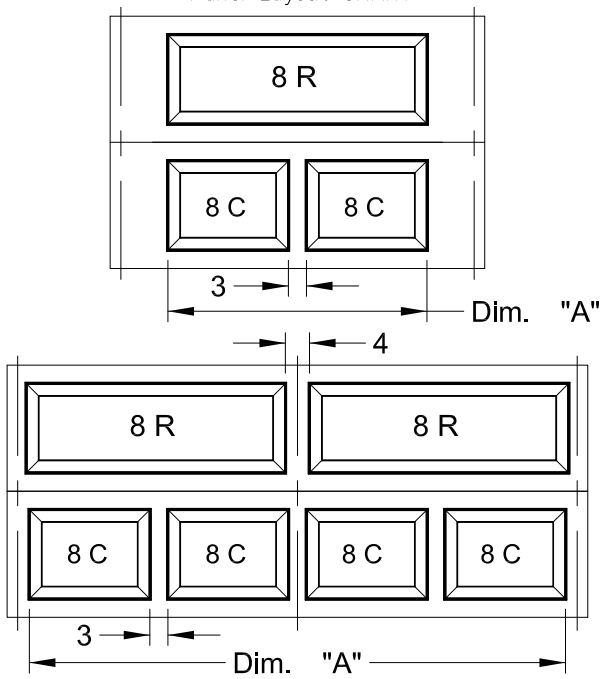


| Door Model | | Section Width | U-bar 20 Ga. (.82#/ft) | U-bar 18 Ga. (1.15#/ft) |
|---|---|---|---|---|
| TradeMark | Commercial TradeMark | 9'-3" thru 12'-2" | 1 every other Section | |
| | | 12'-3" thru 16'-2" | 1 per section | |
| | | 16'-3" thru 20'-2" | | 1 per Section |

Door with an even number of sections requires a Ubar on Top Section.