

PLAN VIEW - ZENITH AUTO SLIM DOOR W Swing Door RESIDENTIAL-3654 (5)

*GENERAL

*STRUCTURAL

*MACHINE ROOM (WHERE REQUIRED)

SLEEVES FOR ELECTRIC LINES- FROM MACHINE ROOM TO
HOISTWAY AS REQUIRED. (POSITION PER INSTALLERS INSTRUCTIONS).

*ELECTRICAL

LIGHTING- THE ILLUMINATION SHALL BE NOT LESS THAN 200 LX (19 FC) AT THE FLOOR LEVEL IN ALL MACHINE ROOMS AND MACHINERY SPACES. ENSURE AT LEAST 100 LX (10 FC) AMBIENT LIGHTING OVER LIFT AREA.



PHONE- NEED A DEDICATED PHONE LAND LINE

*ENTRANCES

FASCIA PANEL, BELOW UPPER LEVEL ENTRANCE- WHERE REQUIRED, FASCIA PANEL MUST BE FASTENED TO A SOLID WALL AND BE PERPENDICULAR TO THE FLOOR AND WALLS. HOISTWAY FASCIA IS NOT SELF-SUPPORTING FOR LONG, CONTINUOUS RUNS VOID OF ENTRANCES. ADEQUATE SUPPORT FOR THE FASCIA MUST BE PROVIDED.


NOTE LIFTING BEAM:
A 4000LB MIN SWL BEAM MUST BE PROVIDED IN THE OVERHEAD. BEAM TO BE POSITIONED AS SHOWN IN ELEVATION & PLAN VIEWS. FOR OVERHEAD OF 108" POSITION THE UNDERSIDE OF BEAM AT 104" & BEAM MUST BE TEMPORARY.

NOTE C
ALL INFORMATION IS SUBJECT TO CHANGE.
PLEASE REFERENCE OUR ON-LINE DRAWINGS AT
[WWW.SAVERIA.COM](http://www.saveria.com) FOR THE MOST RECENT UPDATES.

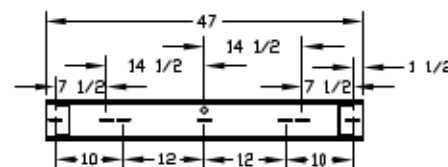


RAIL BRACKETS



FOR TOTAL PULL-OUT FORCE ON RAIL BRACKET,
eq.2 x 720 = 1440 lbf
FOR LOCAL APPLICATION OF PIT LOAD,
RJ MUST BE DOUBLED.

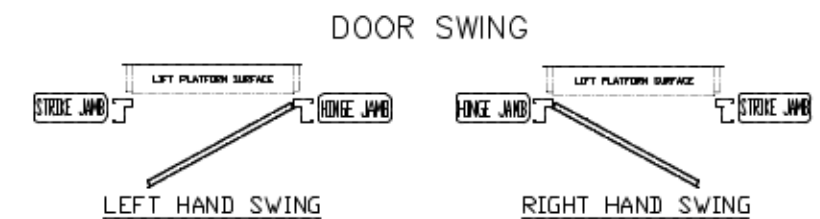

LOADS ON PIT



RESIDENTIAL ELEVATOR
ZENITH MODEL 36X54 TYPE 5

CUSTOMER:	DATE:	THE INFORMATION EXHIBITED HEREIN IS THE EXCLUSIVE PROPERTY OF  savaria™ AND MAY NOT BE USED BY OTHERS WITHOUT PRIOR WRITTEN CONSENT	 SHEET# 1/1
PROJECT:	ISSUE/REV DATE:		
LOCATION:	COMPLETED BY:		