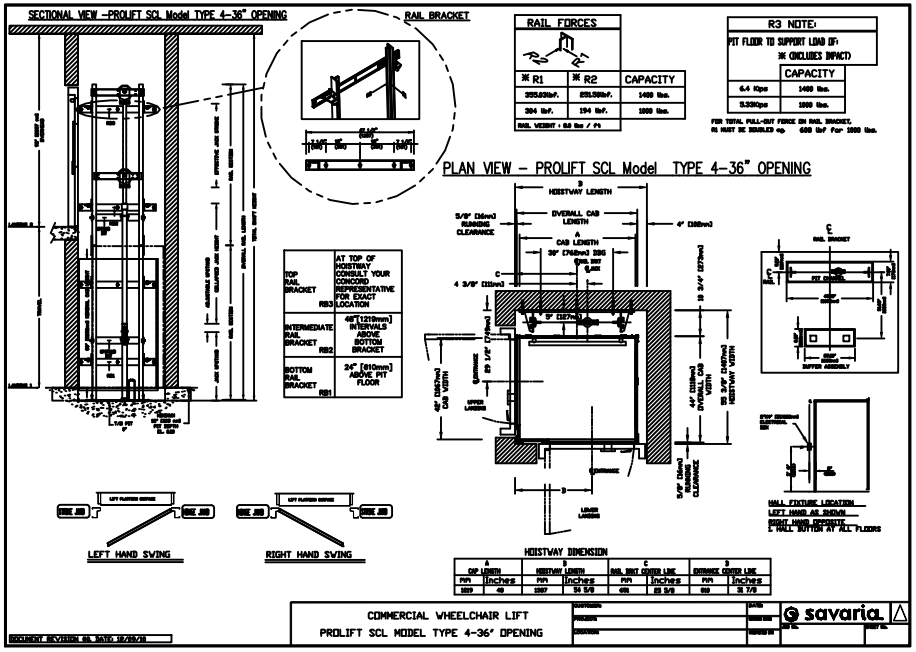
SECTIONAL VIEW –PROLIFT SCL Model TYPE 4–36" OPENING
RAIL BRACKET
RAIL FORCES
R1
R2
CAPACITY
R3 NOTE:
PIT FLOOR TO SUPPORT LOAD OF:
(INCLUDES IMPACT)
CAPACITY
TOP RAIL BRACKET RB3
AT TOP OF HOISTWAY CONSULT YOUR DEALER REPRESENTATIVE FOR EXACT LOCATION
INTERMEDIATE RAIL BRACKET RB2
48"(1219mm) INTERVALS ABOVE BOTTOM BRACKET
BOTTOM RAIL BRACKET RB1
24" (610mm) ABOVE PIT FLOOR
PLAN VIEW – PROLIFT SCL Model TYPE 4–36" OPENING
HOISTWAY LENGTH
OVERALL CAB LENGTH
CAB LENGTH
RUNNING CLEARANCE
OVERALL CAB WIDTH
HOISTWAY WIDTH
HALL FIXTURE LOCATION
LEFT HAND AS SHOWN
RIGHT HAND OPPOSITE
1 HALL BUTTON AT ALL FLOORS
LEFT HAND SWING
RIGHT HAND SWING
HOISTWAY DIMENSION
COMMERCIAL WHEELCHAIR LIFT
PROLIFT SCL MODEL TYPE 4–36" OPENING
savaria

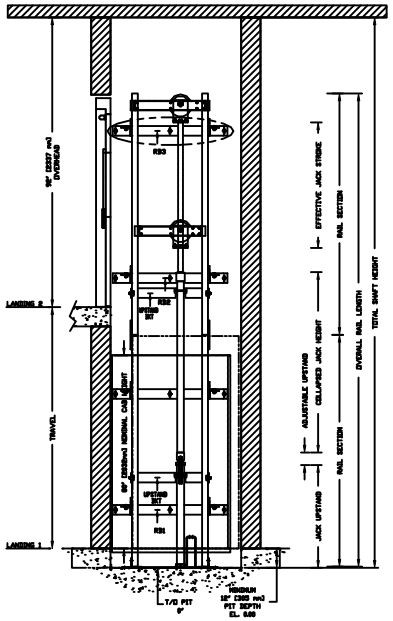
RS3
RS2
RS1
LANDING 2
LANDING 1
TRAVEL
JACK UPSTAND
ADJUSTABLE UPSTAND
COLLAPSED JACK HEIGHT
EFFECTIVE JACK STROKE
RAIL SECTION
OVERALL RAIL LENGTH
TOTAL SHAFT HEIGHT
T/O PIT
MINIMUM PIT DEPTH


HOISTWAY LENGTH
OVERALL CAB LENGTH
CAB LENGTH
RUNNING CLEARANCE
OVERALL CAB WIDTH
HOISTWAY WIDTH
UPPER LANDING
LOWER LANDING


HOISTWAY LENGTH
OVERALL CAB LENGTH
CAB LENGTH
RUNNING CLEARANCE
OVERALL CAB WIDTH
HOISTWAY WIDTH
UPPER LANDING
LOWER LANDING


HOISTWAY LENGTH
OVERALL CAB LENGTH
CAB LENGTH
RUNNING CLEARANCE
OVERALL CAB WIDTH
HOISTWAY WIDTH
UPPER LANDING
LOWER LANDING