


NOTE:
1/16" TOLERANCE
ALLOWED FROM CENTERLINE
FOR EMBOSSMENT LOCATIONS
TOP TO BOTTOM
AND SIDE TO SIDE.

NOTE:
THIS LAYOUT BASED ON:
3'0" X 6'8" EMBOSSED DOOR
FOR 7'0 DOORS
EMBOSSMENT LOCATION
DIFFERENCE IS SPLIT BETWEEN
TOP AND BOTTOM RAILS


EMBOSSMENT SECTION A-A

SCALE 2X
ALL DIMENSIONS (T.S.C.) TO SHARP CORNER

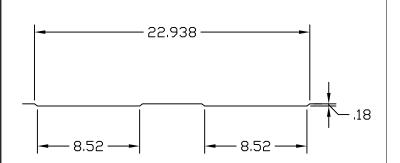

EMBOSSMENT SECTION B-B

SCALE 2X
ALL DIMENSIONS (T.S.C.) TO SHARP CORNER

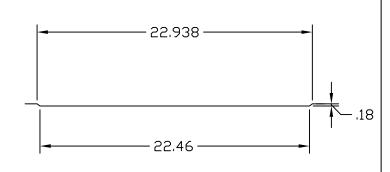



3 PANEL FLAT CRAFTSMAN (SHAKER)
EMBOSSMENT OPTION
FOR STEEL DOORS

| 11-200 |
|---------|
| DATE |
| 1-15-19 |
| NAME |
| KRB |
| SECTION |
| II |
| PAGE |
| 20Q |
| |

DWG#

THIS MATERIAL IS PROPRIETARY AND CONFIDENTIAL TO TAYLOR ENTRANCE SYSTEMS AND SHALL NOT BE REPRODUCED, COPIED OR DISSEMINATED WITHOUT THE EXPRESS WRITTEN PERMISSION OF TAYLOR ENTRANCE SYSTEMS.