TTX 1102 LOW ENERGY SWING DOOR OPERATOR

TORMAX AUTOMATIC

DOUBLE EGRESS W/CONTINUOUS HEADER, VISIBLE R.H. INSWING, R.H. OUTSWING, BUTT HUNG AND OFFSET PIVOT APPLICATION

JOB NAME: _____ DATE: _____

DOOR LOCATION: _____ DOOR NO: _____ SHEET ____ OF ____

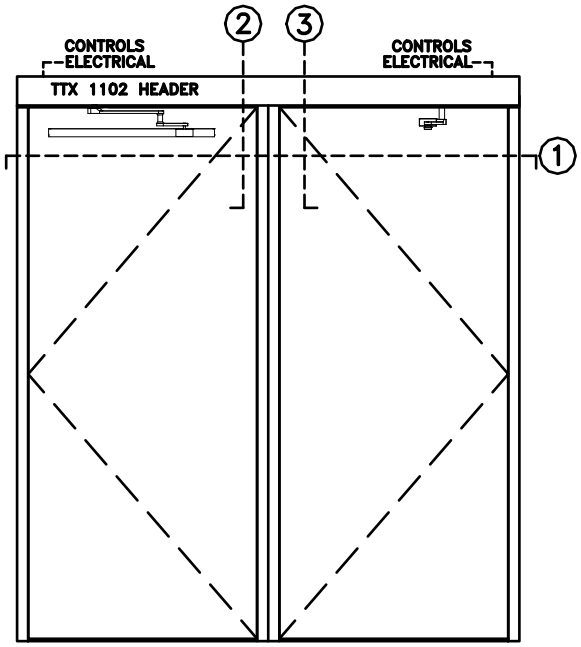

ELEVATION

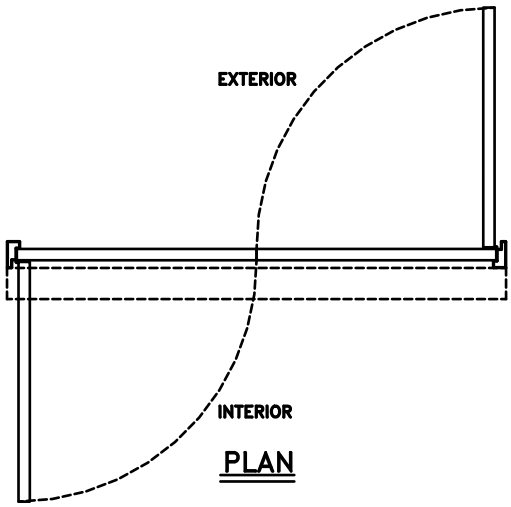

PLAN

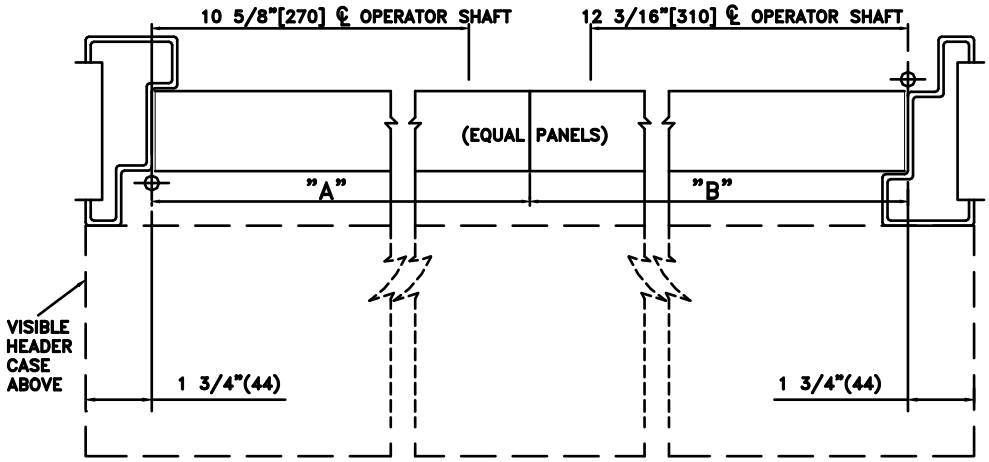

1 HORIZONTAL SECTION

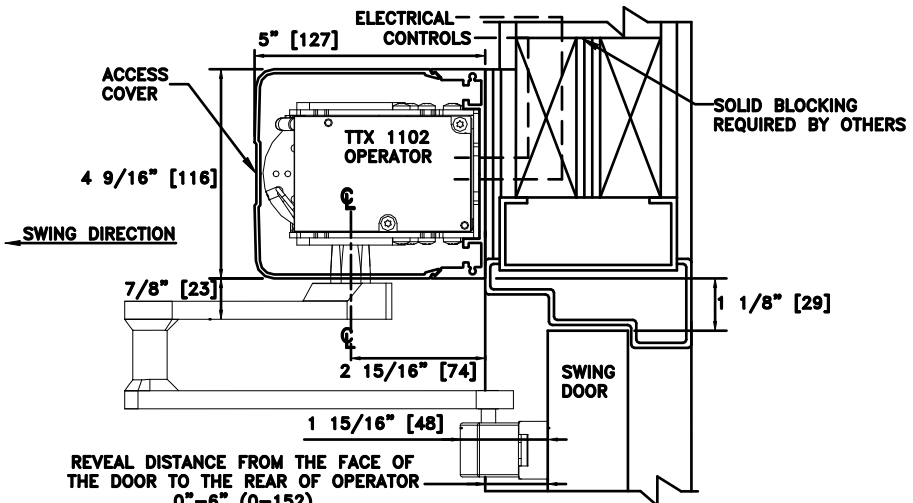

2 VERTICAL SECTION "A"

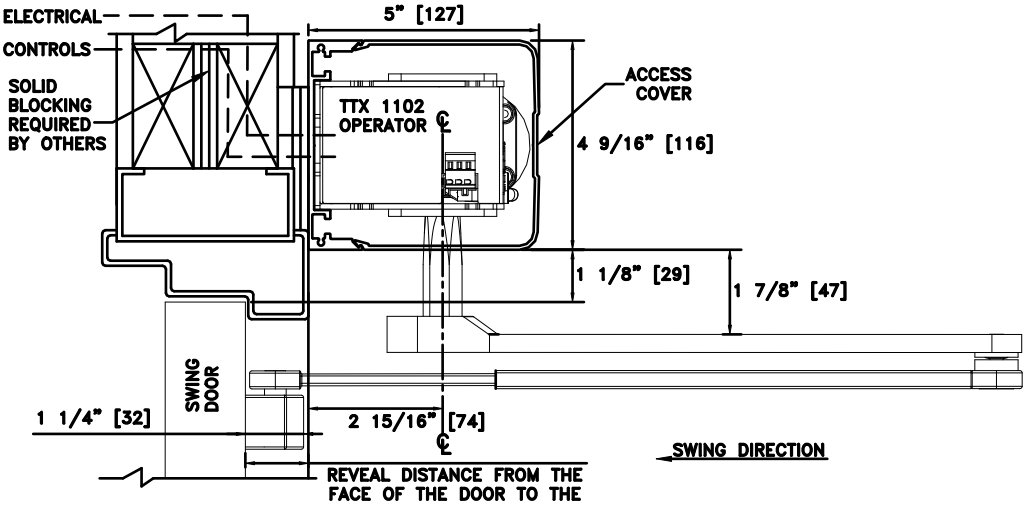

3 VERTICAL SECTION "B"

NOTES:
1. DETAILS NOT TO SCALE.
2. ELECTRICAL REQUIREMENTS:
   120VAC, 5AMPS MIN. TO OPERATOR BY ELECTICAL CONTRACTOR.
3. DOORS, FRAMES AND HARDWARE BY OTHERS.
4. 32" CLEAR DOOR OPENING REQUIRED TO MEET A.D.A. REQUIREMENTS.
5. DOORS MUST BE NON-LATCHED FOR PROPER OPERATION.