



JOB NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

DOOR LOCATION: \_\_\_\_\_ DOOR NO: \_\_\_\_\_ SHEET OF \_\_\_\_\_

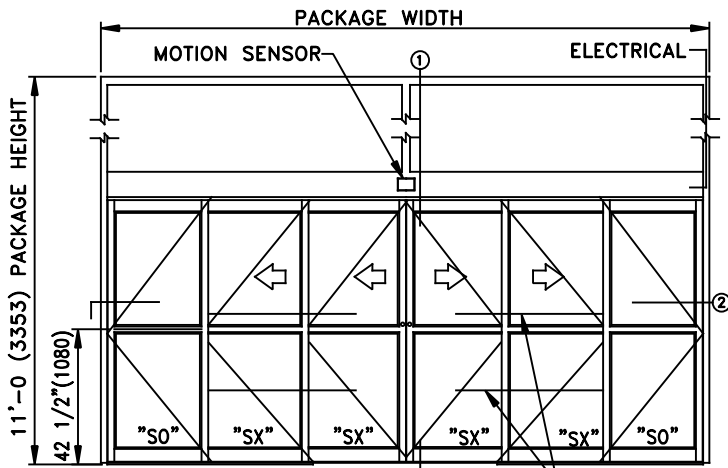

**ELEVATION**

DOORWAY HOLDING BEAMS  
 AT 24"(610) AND 48"(1219)

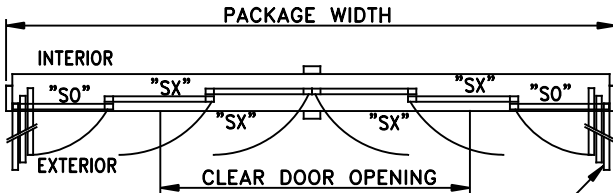


**PLAN**

EMERGENCY BREAKOUT  
 SIDELIGHT AND SLIDING DOORS


SIX PANEL FORMULAS SO-SX-SX-SX-SX-SO (PANEL OVERLAP 2 5/8")  
 PANEL WIDTH=[(FRAME-4.375)+(10.5)]/6  
 DOW=FRAME WIDTH-(4.375)-(2 x PANEL WIDTH)-(14.5)  
 FRAME WIDTH=(DOWx1.5)+31 5/16"  
 EMERGENCY BREAKOUT=UNIT WIDTH-21 1/4"

See Appendix For  
 Details of TX9400  
 With Heavy Duty Drive  
 System

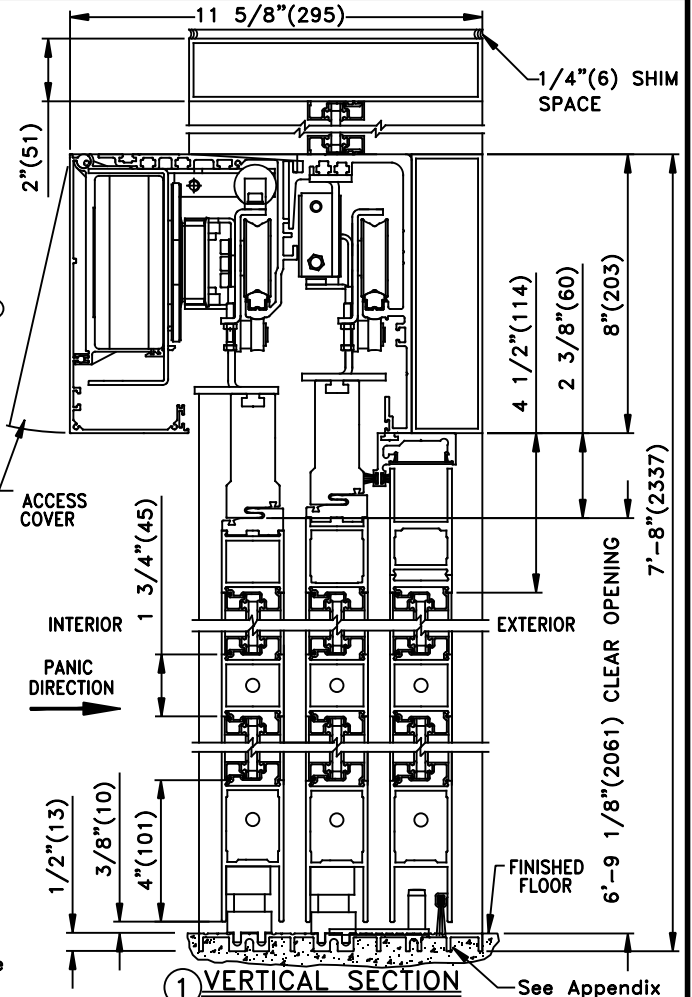

**VERTICAL SECTION**

See Appendix  
 For Threshold  
 Options

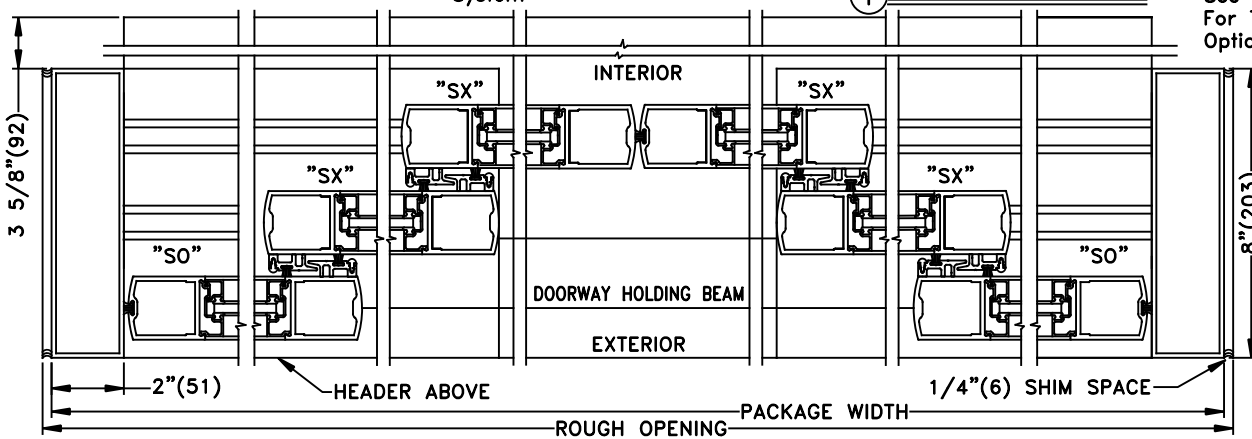

**HORIZONTAL SECTION**

**SAMPLE PACKAGE WIDTH INFORMATION**

PKG. WIDTH	NOMINAL CLEAR DOOR OPENING	SLIDING DOOR / PANEL NOM. WIDTH	EMERGENCY BREAKOUT NOM. WIDTH
10'-0" (3048)	59 1/8" (1502)	21" (533)	102 3/4" (2610)
12'-0" (3658)	75 1/8" (1908)	25" (635)	126 3/4" (3219)
14'-0" (4267)	91 1/8" (2315)	29" (737)	150 3/4" (3828)

**NOTES:**

1. DETAILS NOT TO SCALE.
2. ELECTRICAL REQUIREMENTS:  
 120VAC, 5AMPS MIN. TO OPERATOR BY ELECTRICAL CONTRACTOR.
3. DOOR PACKAGES ARE INDIVIDUALLY ENGINEERED TO FIT YOUR JOB REQUIREMENTS.