


OPTION ONE

FIXING METHOD OPTIONS:

1. FASTEN MATERIAL DIRECTLY TO METAL JOIST

2. INSTALL MATERIAL TO TOP CONDUIT, UTILIZE BEAM CLIPS TO HOLD TOP CONDUIT IN PLACE (NOT SHOWN)

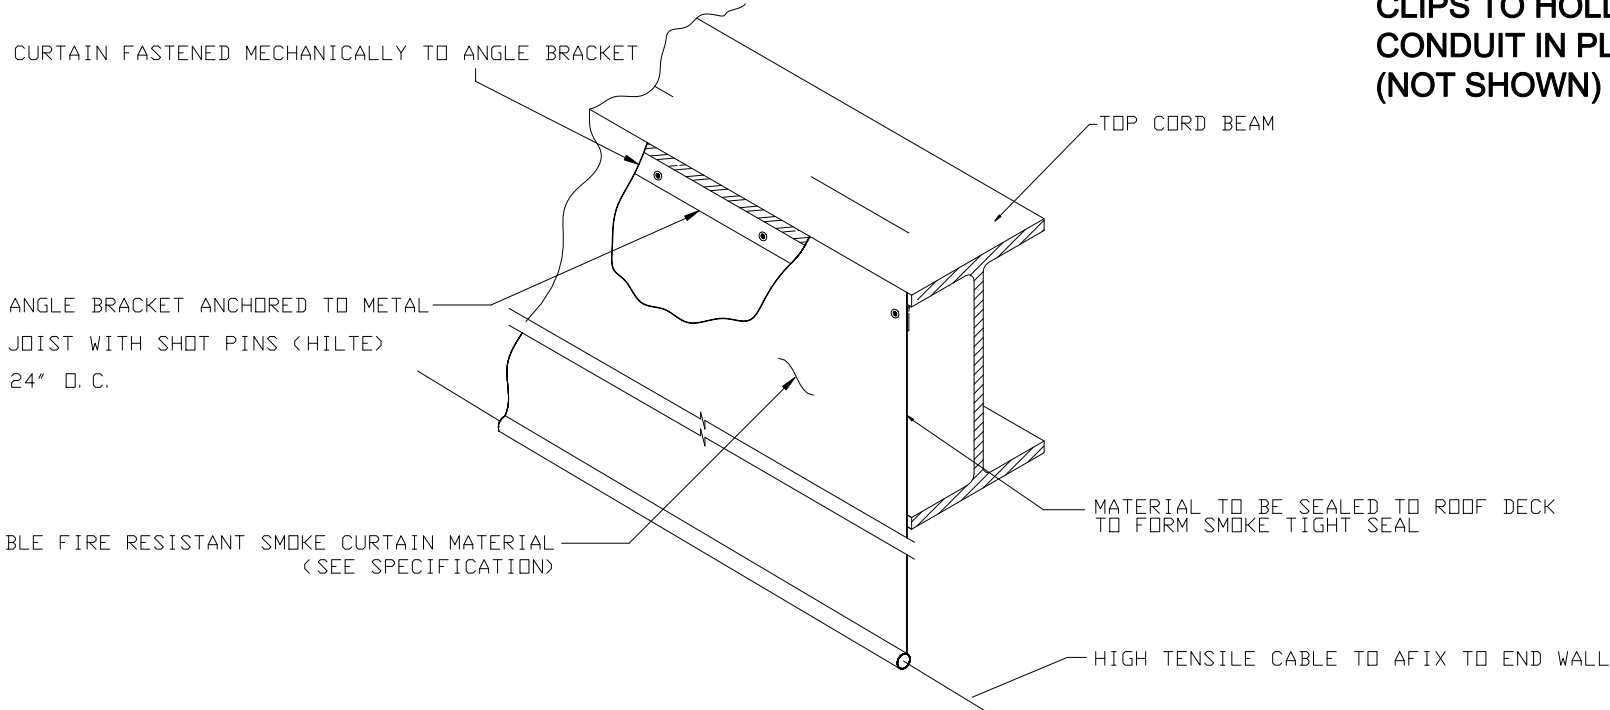

USSF FIXED IN PLACE DRAFT CURTAIN CONNECTION TO BEAM

FABRIC BROKEN OUT FOR CLARITY
SCALE: NONE

Project: UNTITLED Product Name: FIXED CURTAIN					Title: FIXED CURTAIN CONNECTION TO BEAM
					Date: mddd/yy
	#	REVISION	DATE	BY	