

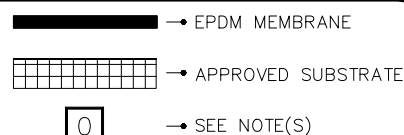
NOTES:

1. PRE-CUT 7" X 9" CORNER OR 9" X 9" QUICK-APPLIED UNCURED EPDM.
2. FOR PROJECTS WITH 25 AND 30-YEAR WARRANTIES OR WHEN USING 90-MIL MEMBRANE, INSTALL A 6" T-JOINT COVER PRIOR TO INSTALLING A 12" T-JOINT COVER. SEAL TOP LAYER WITH CONTINUOUS LAP SEALANT. PER DETAIL VGC-15.4A
3. A HEAT GUN MUST BE USED WHEN FORMING QUICK-APPLIED UNCURED EPDM FLASHING IN COLDER TEMPERATURES.

MAXIMUM WARRANTY: 30 YEARS



INSIDE CORNER WITH
CONTINUOUS EPDM WALL
FLASHING

THERMOSET
ROOFING SYSTEM

VGC-15.3