



DIMENSIONS		cm	
(A)	2"	5	MIN.
(B)	3"	7.5	APPROX.

NOTES:

1. CONSULT THE RESPECTIVE MANUFACTURER OF THE SELF-FLASHING METAL CURB FOR PROPER SECUREMENT.
2. WATER CUT-OFF MASTIC MUST BE HELD UNDER CONSTANT COMPRESSION.
3. USE DETAIL VGC-15.6 TO ACHIEVE SUFFICIENT COVERAGE OF METAL FLANGE AT CORNERS.
4. IF THE VERTICAL SPLICE ON THE CURB FLASHING IS NOT LOCATED AT THE CORNER, USE DETAIL VGC-2.3 FOR EPDM MEMBRANE SPLICES AT ANGLE CHANGES.

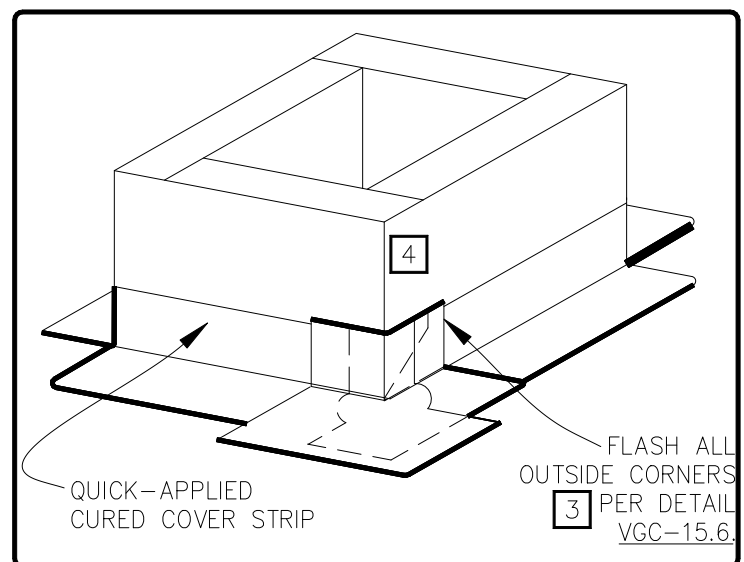

MAXIMUM WARRANTY: 20 YEARS

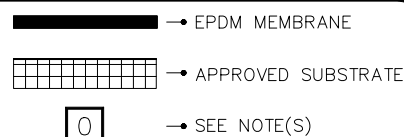NEW SELF-FLASHING
METAL CURBTHERMOSET
ROOFING SYSTEM
VGC-5.5