


FIELD APPLIED QA SEAM TAPE

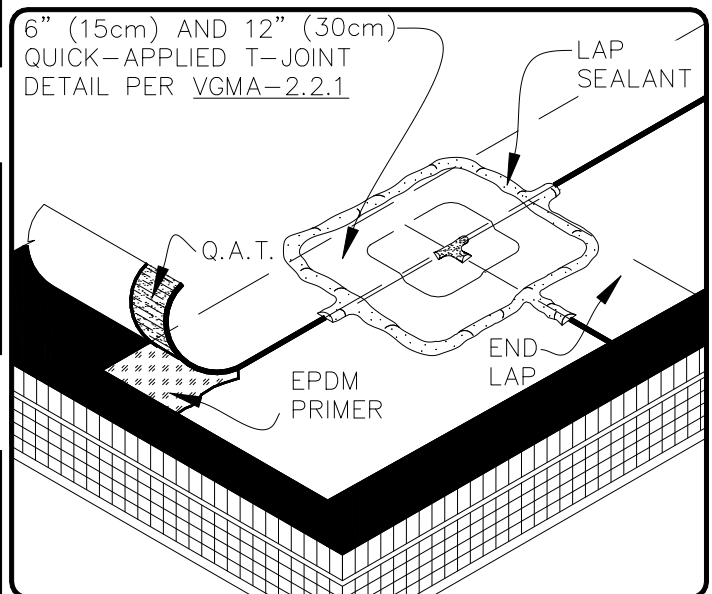

Q.A.T (QA SEAM TAPE)


NOTES:

1. HPX FASTENERS AND POLYMER SEAM PLATES ARE REQUIRED OVER STEEL DECKS.
2. END LAPS SHALL BE SPLICED USING 6" (15cm) WIDE QA SEAM TAPE. REFER TO DETAIL VGMA-2.1A.
3. OVERLAP THE ENDS OF FIELD APPLIED QA SEAM TAPE A MINIMUM OF 1" (2.5cm). APPLY LAP SEALANT AT TAPE OVERLAPS 2" (5cm) IN ALL DIRECTIONS.
4. LAP SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED EPDM MEMBRANE.

MAXIMUM WARRANTY: 30 YEARS



MECHANICALLY ATTACHED
EPDM MEMBRANE SPLICE
(25 / 30 YEAR
WARRANTIES)

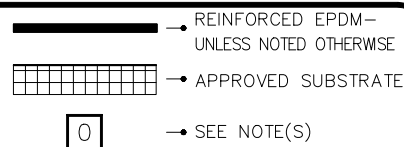

MECHANICALLY
ATTACHED EPDM
VGMA-2.1A