


12 11 10 9 8 7 6 5 4 3 2 1

H
G
F
E
D
C
B
A

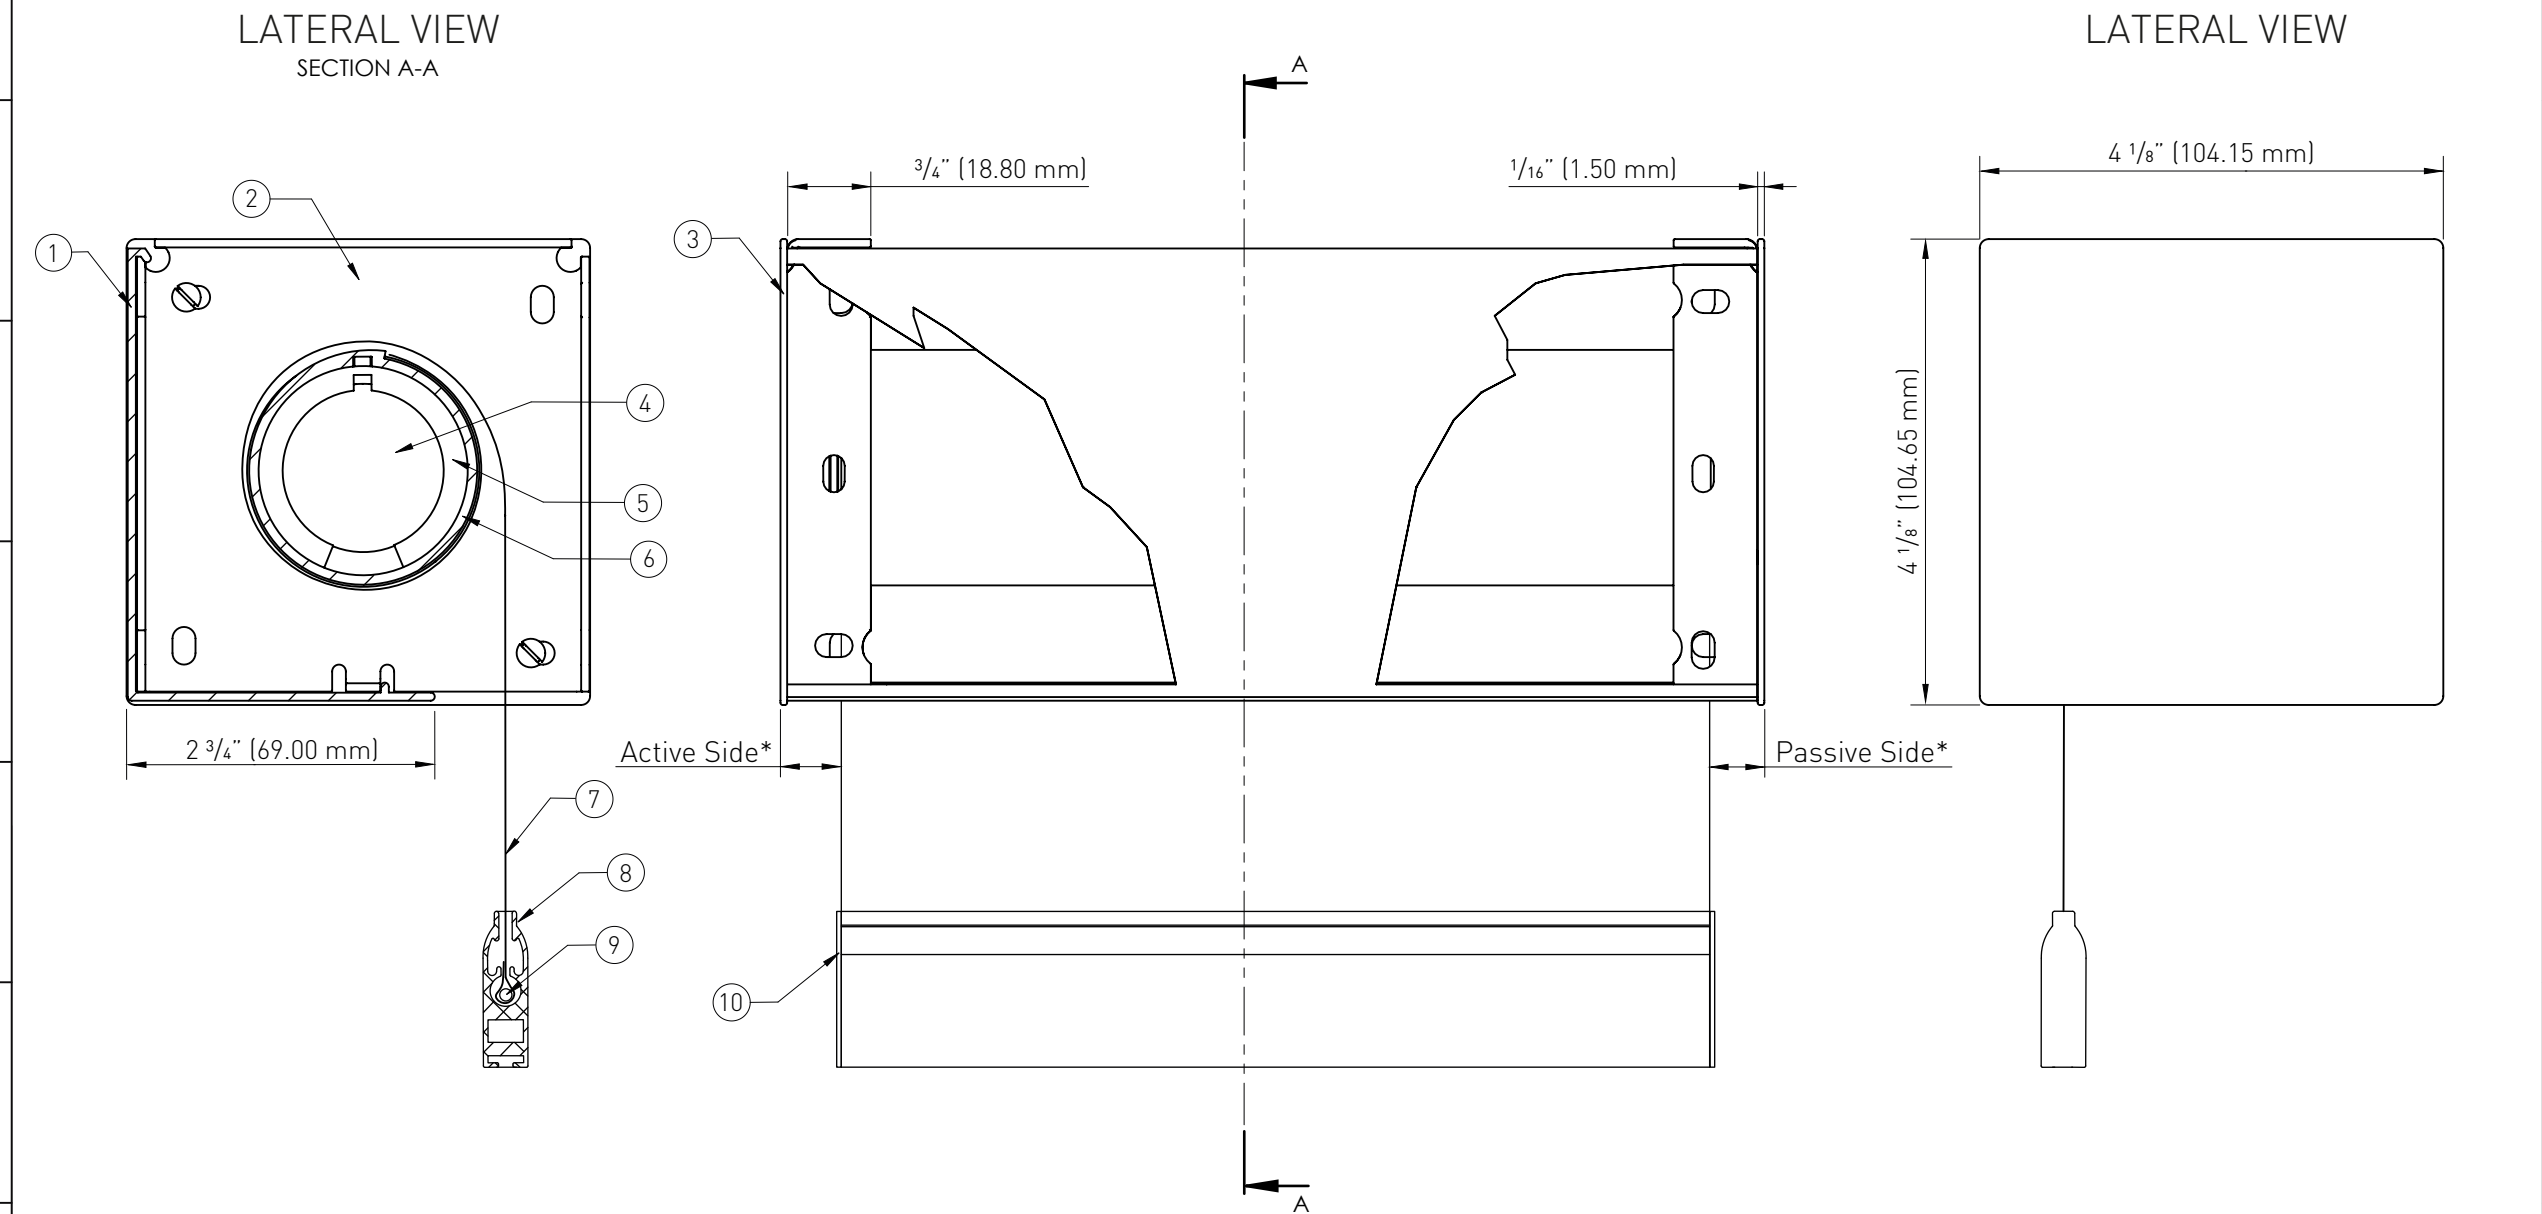

- 1.- 4" ALUMINUM FLAT FASCIA
- 2.- 4" INSTALLATION BRACKET
- 3.- END CAP
- 4.- VTi RE-LION MOTOR
- 5.- TUBE ADAPTER
- 6.- ALUMINUM TUBE
- 7.- FABRIC
- 8.- BOTTOMRAIL
- 9.- INSERT
- 10.- BOTTOMRAIL END CAP

SHEET 1 OF 1

TUBES	CROWN & DRIVE	MOTORS	*Active Side	*Passive Side	Total
1 3/4" (45 mm)	6-700-AS-35045	6-800-MM-35XXX	13/16" [20.83 mm]	5/8" (16.10 mm) 0-154-PA-XXX01	1 7/16" [36.93 mm]
		6-800-ME-35XXX	13/16" [20.83 mm]		1 7/16" [36.93 mm]
		6-800-MB-35XXX	1 1/16" [17.64 mm]		1 5/16" [33.74 mm]
2" (50 mm)	6-700-AC-35K50 6-700-AD-35K50	6-800-MM-35XXX	13/16" [20.83 mm]	5/8" (16.10 mm) 0-154-AD-38K50	1 7/16" [36.93 mm]
		6-800-ME-35XXX	13/16" [20.83 mm]		1 7/16" [36.93 mm]
		6-800-MB-35XXX	1 1/16" [17.64 mm]		1 5/16" [33.74 mm]

The calculated gaps were based on the use of the following components: 4" Standard Fascia Easy Tab (Small) or Motor Block w/Plastic End Cap.
This chart is provided as a reference for deduction calculation purposes. However, some variations are possible.
Vertilux strongly recommends the validation of the specific deductions for every particular project.
*The Active/Passive Side can be installed on either the right or left.



TITLE 4" FLAT FASCIA
MOTORIZED OPERATION
DATE: NOVEMBER 2025

12 11 10 9 8 7 6 5 4 3 2 1