



CUSTOM SIZES AVAILABLE!

Stockton Custom Fabrication

877-786-2587

custom@StocktonProducts.com




TFBH: TruFlush™ Backing Makeup Hard Side

- Faster Installation
- Eliminates Costly Backcharges
- Increase Production Installation, Plus Drywall, Taping And Finishing
- Increased Safety, No Grinders Needed, Only Chop Saw And Screw Gun
- Galvanized Steel (GS)
- Patent Pending

Low profile backing that provides increased load capacity. TruFlush™ Backing Makeup Hard Side will eliminate build up, drywall cracking and drywall fastener popping. Available in 20 gauge or 16 gauge for various stud spacing.


Note: Custom spacing and steel thickness available with extended lead times.

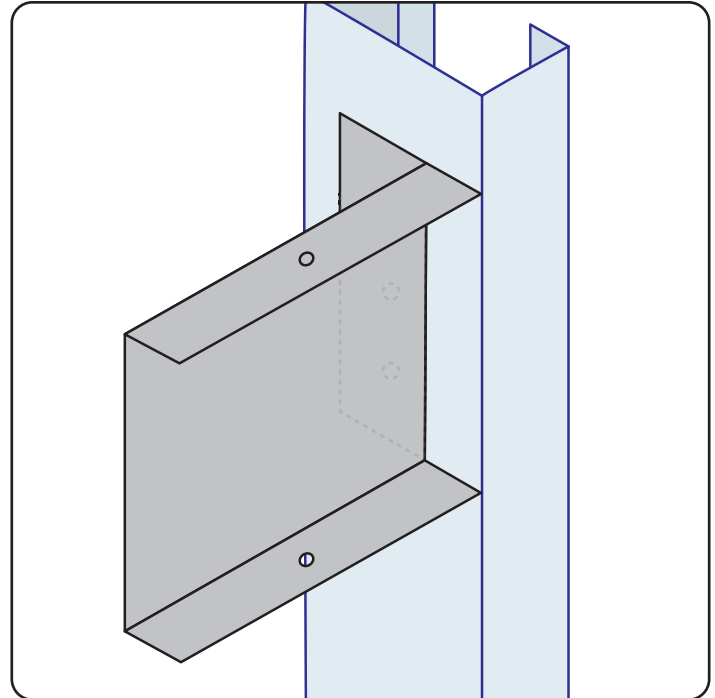

See Installation Guide For Load Testing Data

TRUFLUSH™

NEW

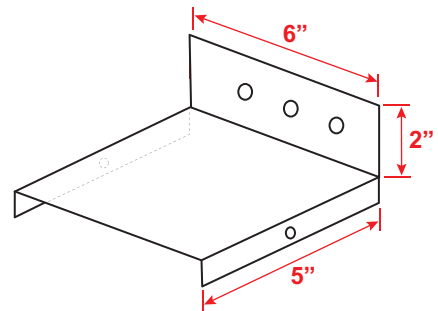

Materials And Finishes:

Details: stpro.us/MET

Galvanized Steel (GS) in 20 ga. or 16 ga.
G60 standard (G90 optional)

ASTM Codes:

Details: stpro.us/ASTM

A1003, A653, A924, C645, C754, C955

QUOTE

Company: _____
Name: _____
Address: _____
City: _____
State/ZIP: _____
Phone: _____
eMail: _____

QTY: _____
Material/Gauge: _____


PO Number: _____
Job/Project: _____
Notes: _____

877-786-2587 • StocktonProducts.com



TFBH: TruFlush™ Backing Makeup Hard Side

Patent Pending

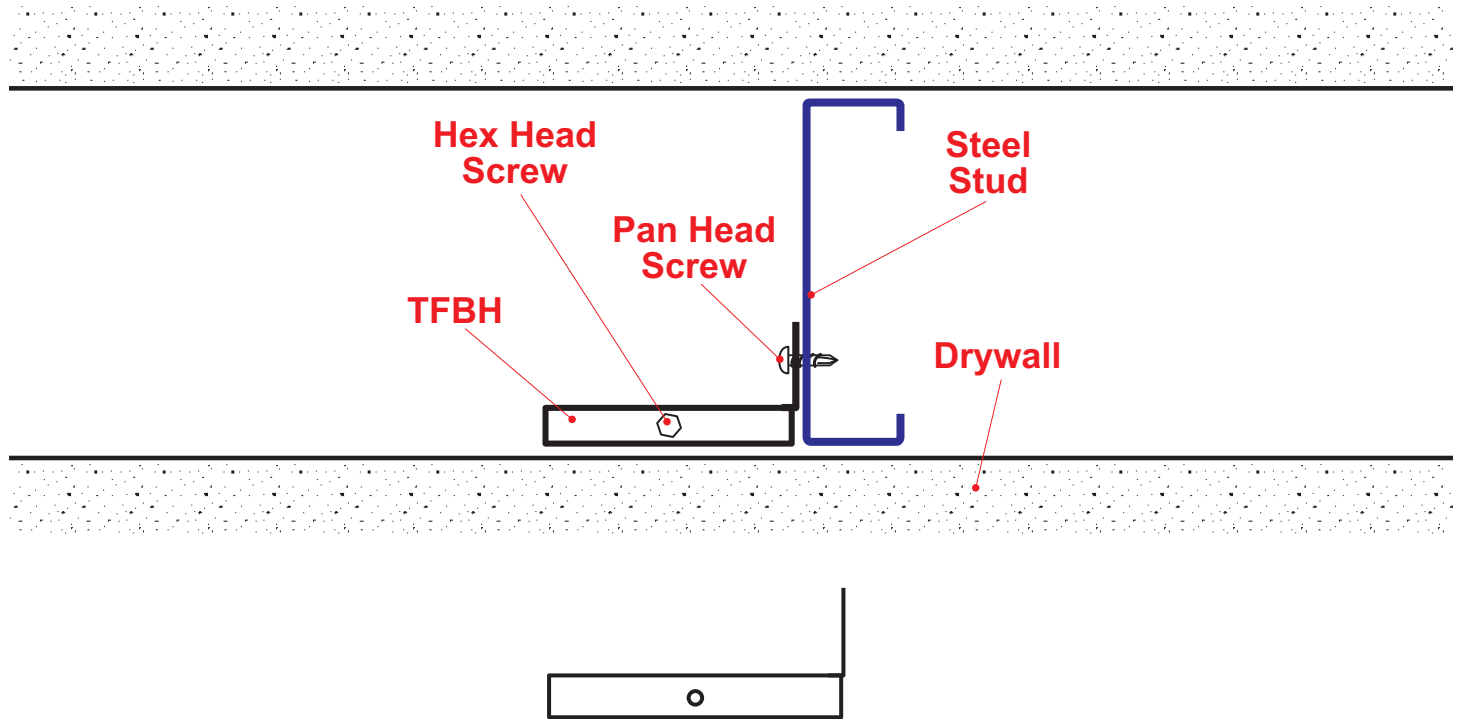

Low profile backing that provides increased load capacity. TruFlush™ Backing Makeup Hard Side will eliminate build up, drywall cracking and drywall fastener popping. Available in 20 gauge or 16 gauge for various stud spacing.

Load Testing Data

The allowable span lengths for the nonstructural steel stud assemblies are based on the limiting span calculated wall at flexural strength, and end reaction strength. Based on the tabular information for both the Fixed and Adjustable TruFlush™ Backing the allowable spans as managed in comparison to common stud spacings of 12", 16", and 24" can be used with in conjunction with all typical stud gauge applications.

16 Gauge 2 Piece Configuration - Allowable Spans

DP (psf)	Span lengths (in) Based On Strength Vertical Spacing of TruFlush™ Backing			
	16	24	32	48
5	91.9	75.1	65.0	53.1
10	65.0	53.1	46.0	37.5
15	53.1	43.3	37.5	30.6
30	37.5	30.6	26.5	21.7
40	32.5	26.5	23.0	18.8
50	29.1	23.7	20.6	16.8
60	26.5	21.7	18.8	15.3

20 Gauge 2 Piece Configuration - Allowable Spans

DP (psf)	Span lengths (in) Based On Strength Vertical Spacing of TruFlush™ Backing			
	16	24	32	48
5	83.1	67.8	58.7	47.9
10	58.7	47.9	41.5	33.9
15	47.9	39.2	33.9	27.7
30	33.9	27.7	24.0	19.6
40	29.4	24.0	20.8	17.0
50	26.3	21.4	18.6	15.2
60	24.0	19.6	17.0	13.8

Note: This drawing is supplied solely to assist in the selection and application of product manufactured by Stockton Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.