# AUTOMATE™

# CL 0.8 Cord Lift

Cord lift technology. Low voltage. Dual shaft.
The CL motor can provide continuous power and its simplified wiring solution is directly compatible with roman shading systems and cellular shades.

**BIDIRECTIONAL COMMUNICATION**

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Pulse 2 app.

**INTERCHANGEABLE POWER SOURCE**

Choose to have your shades hard wired for continuous power or opt for a wire-free setup – choose from a rechargeable battery pack or a tube that holds AA batteries.

**FAVORITE POSITIONING**

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite."
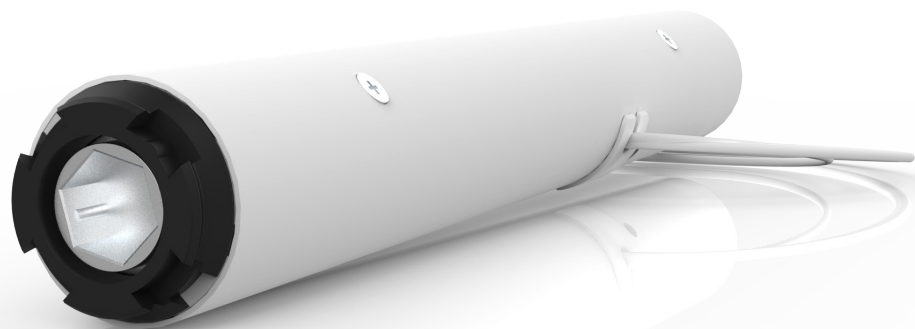
**SIMPLIFIED SETUP**

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.

**PRECISE LIMIT ADJUSTMENT**

Incremental steps during limit setting allows for precise positioning of the shade.

7 YEAR WARRANTY

A DIVISION OF
ROLLEASE ACMEDA

# PRODUCT SPECIFICATIONS

**Part #: MT01-3001-069001**  Cord Lift 0.8 Nm Motor

| | | | |
|---|---|---|---|
| **Voltage** | 12V DC | **Limit Switch Type** | Electronic |
| **Torque** | 0.8 Nm | **Current** | 1.18 A |
| **Max Run Time** | 6 min | **Battery Size/Type** | External Battery Pack |
| **Speed** | 33, 39, 50 RPM | **Temp Working Range** | 32°F to 140°F (0°C to 60°C) |
| **Radio Frequency** | 433.92 MHz | **Insulation Class** | I.CL.B |
| **RF Modulation** | FSK | **Sound Level** | 60dB |
| **IP Rating** | IP40 | **Power** | 14W |

## DIMENSIONS

0.37 in. [9.30mm]

Ø 0.94 in. [Ø 24mm]

Motor antennae length 6.50 in. [165mm]

Motor cable length 13.23 in. [336mm]

7.59 in. [193mm]
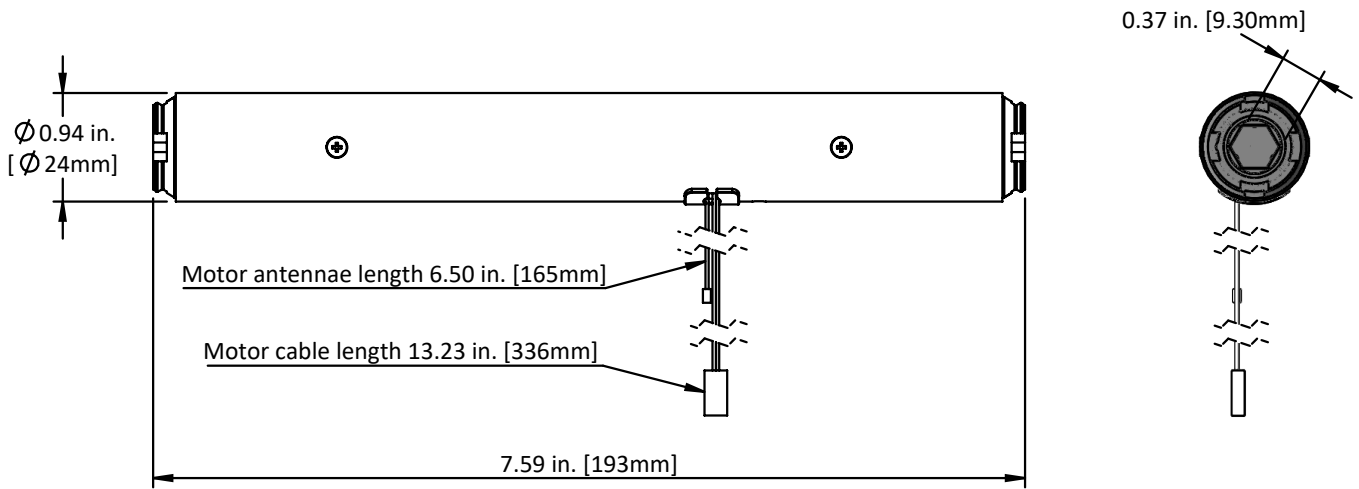
## COMPATIBLE PARTS

**Systems**

**Motor Adaptors**

**Shaft Adaptors**

| | | |
|---|---|---|
| BTG Headrail | MTAD-CLHR-BTGC | MTAD-CLSA-4MMSQ |
| Turnils Headrail | MTAD-CLHR-TUR | MTAD-CLSA-V |
| SS38 Headrail | MTAD-CLHRSS38KT | - |
| - | MTAD-CLHR_US-ROM | MTAD-CLSA-D |
| - | - | MTAD-CLSA-5mmSQ |

## COMPATIBLE PRODUCTS (refer to catalog for full item listings)

### Controllers

Pulse HUB & App

Push 5 remotes

### Power Options

Power Supply

Battery Pack

A DIVISION OF
**ROLLEASE ACMEDA**