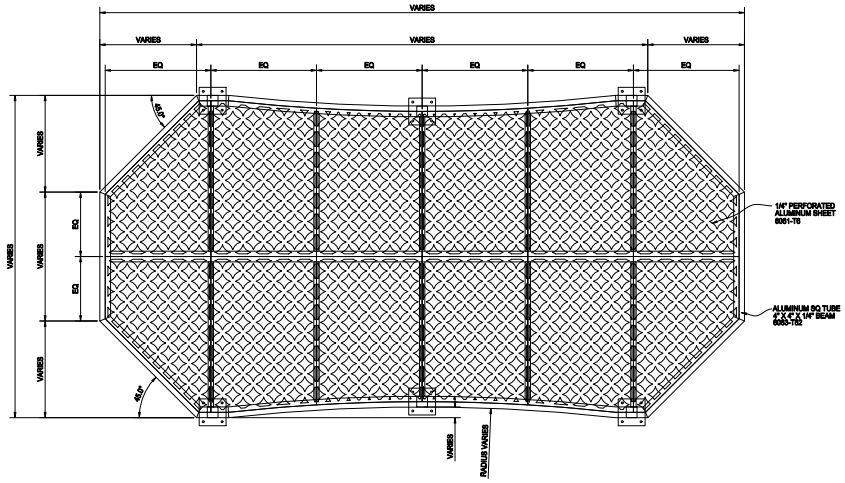

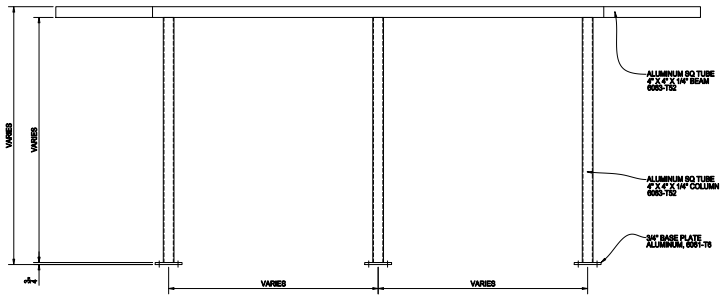

NOTE:

1) THE PROPOSED DESIGN IS IN ACCORDANCE WITH PALMSHIELD'S STANDARD DESIGN PARAMETERS AND MAY CONFLICT WITH PROJECT PLANS AND SPECIFICATIONS. PLEASE CAREFULLY REVIEW YOUR FABRICATION DRAWINGS FOR ANY CONFLICTS.

2) ANCHORS ARE NOT INCLUDED IN THIS SUBMITTAL. SELECTION OF ANCHORING TO BE BY OTHERS.

3) LEAD TIMES FOR FABRICATION VARY PER BACK LOG AT TIME OF APPROVAL OF DRAWINGS AND/OR RECEIPT OF DOWN PAYMENT. UPON APPROVAL ESTIMATED COMPLETION DATES WILL BE SUPPLIED VIA EMAIL. PLEASE ALLOW AN ADDITIONAL 7± DAYS FOR SHIPPING AS REQUIRED.

4) SYSTEM DESIGNED TO BE INSTALLED ON LEVEL SURFACE. IF GRADE IS SLOPED, ELEVATIONS AT POST LOCATIONS MUST BE PROVIDED TO PALMSHIELD. PALMSHIELD WILL MATCH AS CLOSELY AS POSSIBLE TO THE GRADE ELEVATIONS PROVIDED. SOME SHIMMING MAYBE REQUIRED. SHIMS ARE NOT PROVIDED BY PALMSHIELD.

5) ALL GATE POSTS MUST BE SET TO ±1/8" TO INSURE PROPER FUNCTION

6) INSTALLATION TO FOLLOW MANUFACTURER'S RECOMMENDATIONS. FOR RECOMMENDATIONS PLEASE CONTACT PALMSHIELD.

7) PLEASE NOTE THAT NO MATERIAL PROCUREMENT OR FABRICATION WILL BEGIN UNTIL WE HAVE RECEIVED APPROVED SIGNED DRAWINGS.

8) DRAWINGS APPROVED MORE THAN 14 DAYS AFTER SUBMITTAL WILL BE SUBJECT TO PRICE INCREASE WITHOUT NOTICE.

9) PLEASE REVIEW THIS POST LAYOUT AND ASSOCIATED ANCHOR LOCATIONS. PLEASE ADJUST ALL REBAR FOOTING AND FLATWORK LAYOUTS TO AVOID ANCHOR LOCATIONS. ANCHOR LOCATIONS CANNOT BE RELOCATED ONCE PRODUCT IS FABRICATED.

10) SHIMS ARE NOT INCLUDED IN THIS SUBMITTAL. PALMSHIELD HAS SHIM STACKS AVAILABLE FOR AN ADDITIONAL COST TO PROJECT TOTAL.

11) PLEASE INDICATE THAT THE AREA ON WHICH THE PALMSHIELD SYSTEM IS TO BE INSTALLED IS A LEVEL SURFACE BY INITIALING BELOW.

YES, THE SURFACE IS LEVEL_____

NO, THE SURFACE HAS SLOPE_____

12) GATE HINGES TYPICALLY ARE FIELD WELDED. HOWEVER, THE HINGES CAN ALSO BE SHOP WELDED TO POSTS. PLEASE INDICATE WHICH PROCESS IS TO BE APPLIED ON THIS PROJECT BY INITIALING BELOW. IF PREFERENCE IS NOT INDICATED, THE HINGES WILL SHIP TO BE FIELD WELDED.

FIELD WELD GATE HINGES TO POST_____

SHOP WELD GATE HINGES TO POST_____

13) DOUBLE DRIVE LATCH HANDLES ARE TYPICALLY INSTALLED ON THE RIGHT SIDE GATE LEAF. THE LATCH HANDLES CAN ALSO BE INSTALLED ON THE LEFT GATE LEAF. PLEASE INDICATE WHICH GATE LEAF THE LATCH SHOULD BE INSTALLED ON BY INITIALING BELOW. FAILURE TO INDICATE, THE LATCH WILL BE INSTALLED ON THE RIGHT GATE LEAF.

LATCH HANDLE ON RIGHT GATE LEAF_____

LATCH HANDLE ON LEFT GATE LEAF_____

REV	DESCRIPTION	DATE
-	-	-
-	-	-

MARICI SUNSHADE
PLAN & ELEVATION VIEWS
LASER CUT SHEET INFILL
FINISH TO BE DETERMINED

PROJECT #	-	PAGE #	-
SCALE	N.T.S.	DRAWN BY	PS
DATE	09/19/2024	REV	-
SHEET #	01		