


NOTES:

1. WOOD NAILER MUST EXTEND PAST TOTAL WIDTH OF CURB FLANGE.
2. FOUR (4) CURB WRAP CORNERS WILL COMPLETELY FLASH A MAXIMUM CURB SIZE OF 3'X3' (90cmX 90cm). FOR LARGER CURBS USE THE TPO OR PVC CURB WRAP CORNERS IN CONJUNCTION WITH ADDITIONAL SECTIONS OF SURE-WELD TPO OR SURE-FLEX PVC MEMBRANE.
3. IF CURB WRAP CORNER IS NOT USED, THEN USE [U-15G](#) DETAIL FOR OUTSIDE CORNERS.
4. APPROXIMATELY 1/8" (0.5cm) BEAD OF CUT-EDGE SEALANT IS REQUIRED ON THE CUT EDGES OF THE TPO FIELD WRAP CORNER.
5. REFER TO CARLISLE SPECIFICATIONS FOR ACCEPTABLE CARLISLE FASTENERS AND PLATES.
6. CUSTOM SIZES ARE AVAILABLE FOR CURB FLASHING HEIGHTS GREATER THAN 12" (30cm).
7. APPLICABLE BONDING ADHESIVE FOR PVC OR TPO. IN CASE OF TPO, CAV-GRIP III ADHESIVE MAY ALSO BE USED ON VERTICAL PORTION.

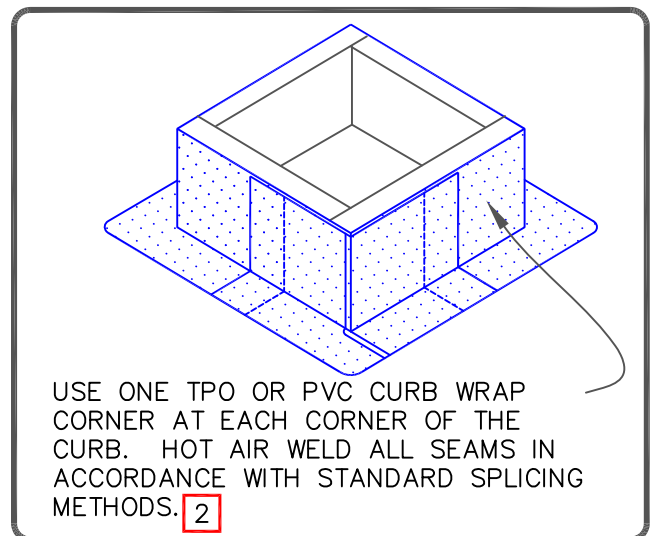

SELF-FLASHING CURB WITH CFA TPO
OR PVC CURB WRAP CORNERS

MAXIMUM WARRANTY: 30 YEARS



DETAIL NO.

U-5D

THERMOPLASTIC UNIVERSAL