




PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
- ⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN BR1000-1.000 BULLETSIELD


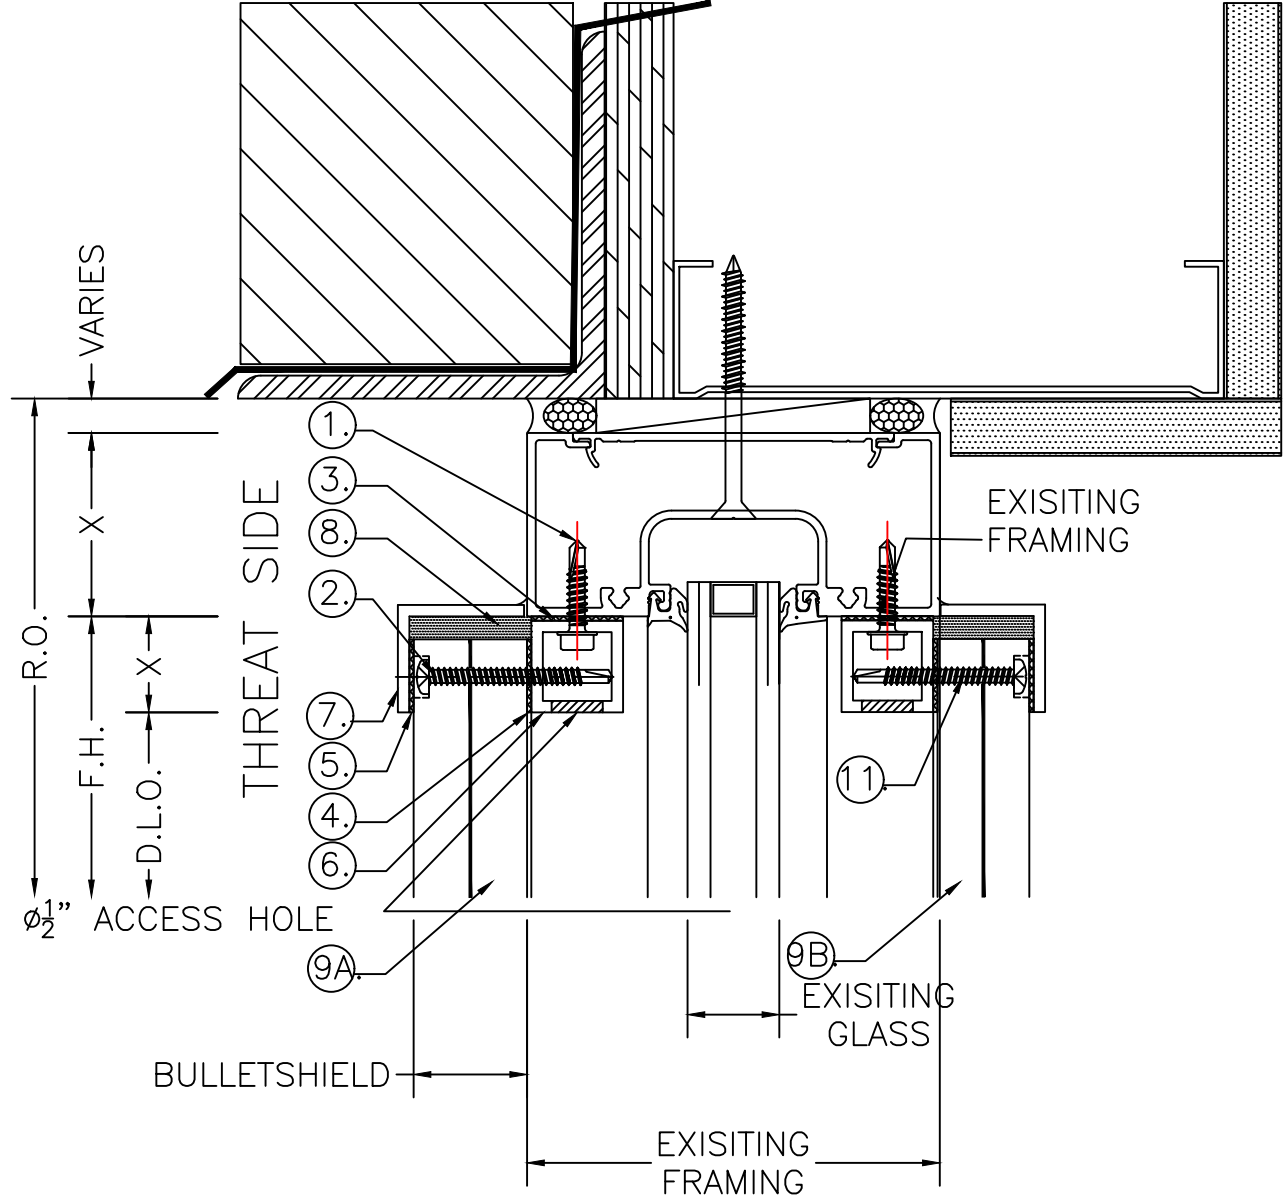


VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

1 HEAD
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

Ø 1/2" ACCESS HOLE

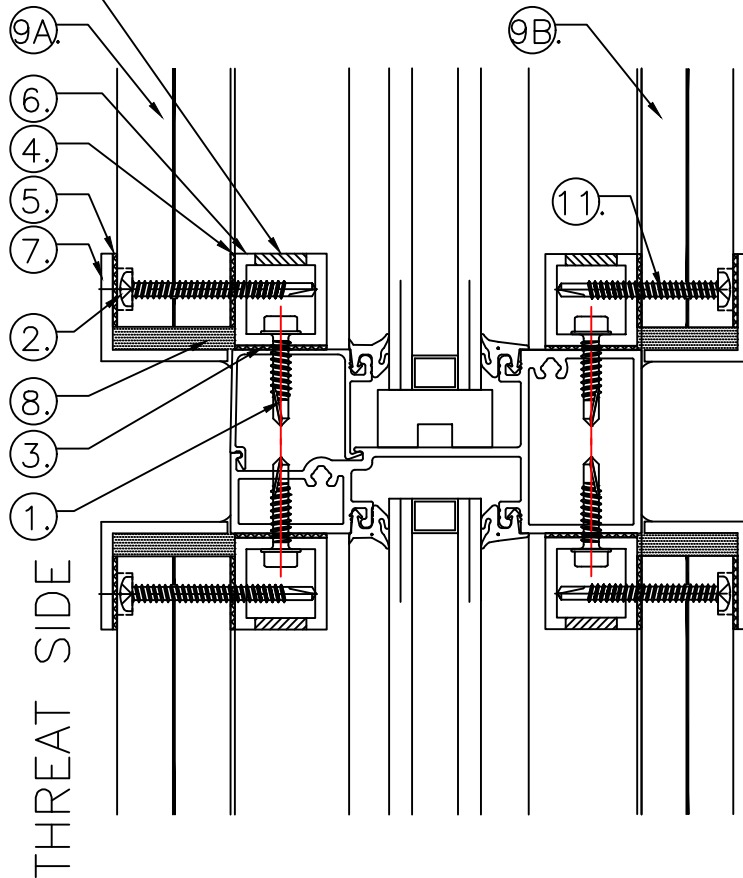

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-.1000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

2 HORIZONTAL
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

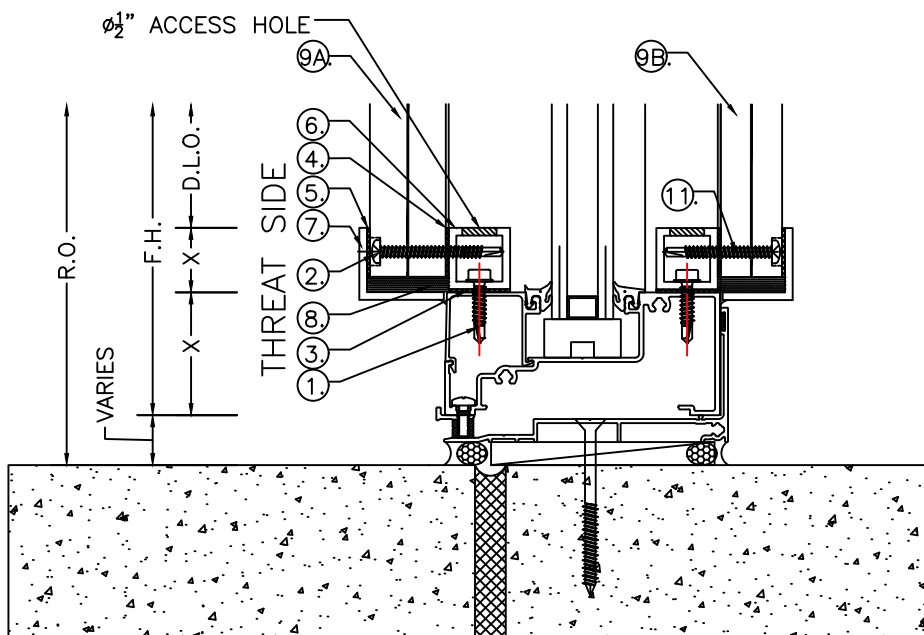

3
D.2 SILL
ARCH. DETAIL REF.:
ARCH. SHEET REF.:


DEFENSELITE®
BULLET SHIELD™

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 3/8" HOLE DRILLED IN MS1250-1.250 BULLETSHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/8" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑤ 3/8" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨ MS1250-1.250 BULLETSHIELD (THREAT SIDE)
BR1000-1.000 BULLETSHIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12x1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 3/8" HOLE DRILLED IN BR1000-1.000 BULLETSHIELD.



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

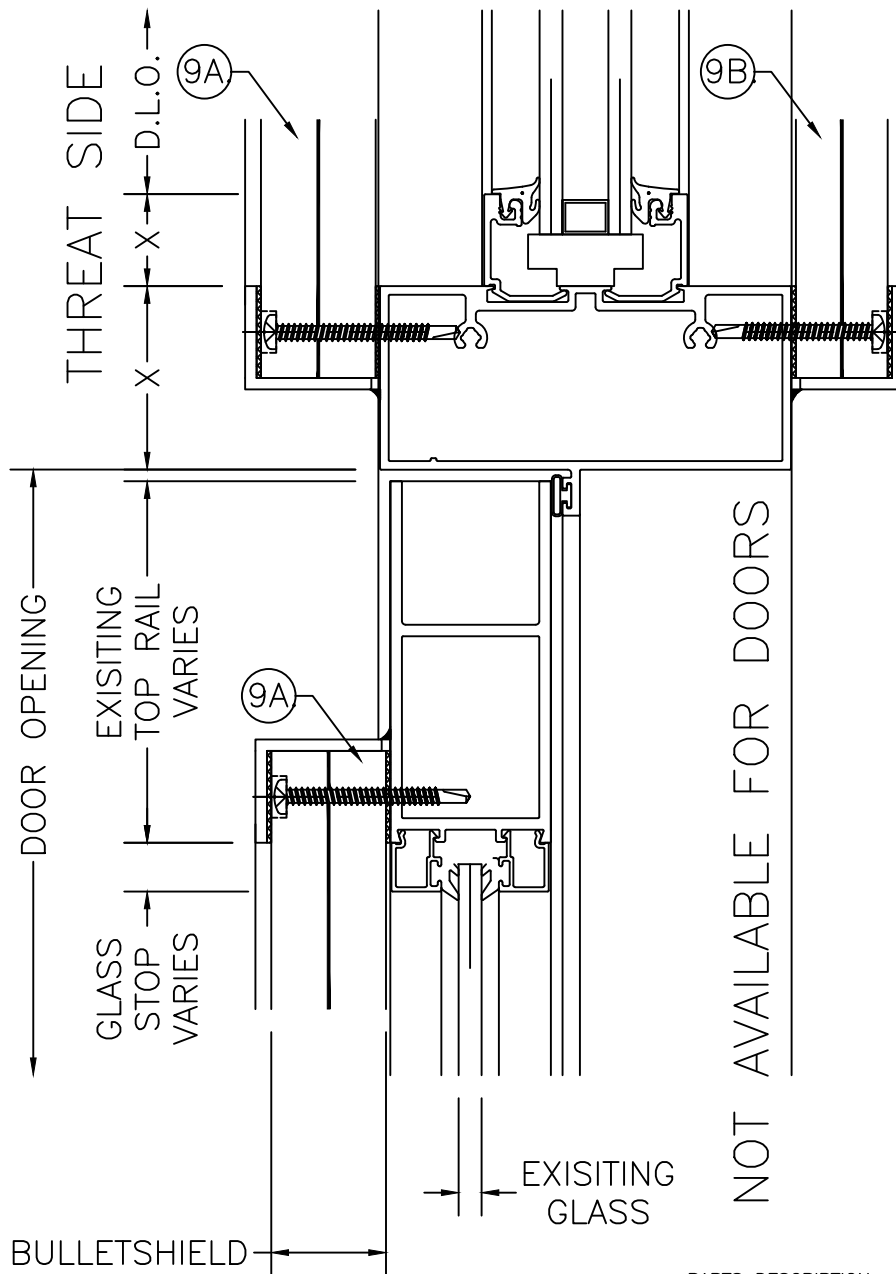

TRANSOM BAR

4
D.2

ARCH. DETAIL REF.:
ARCH. SHEET REF.:


DEFENSELITE®
BULLET SHIELD™

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSHIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSHIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSHIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

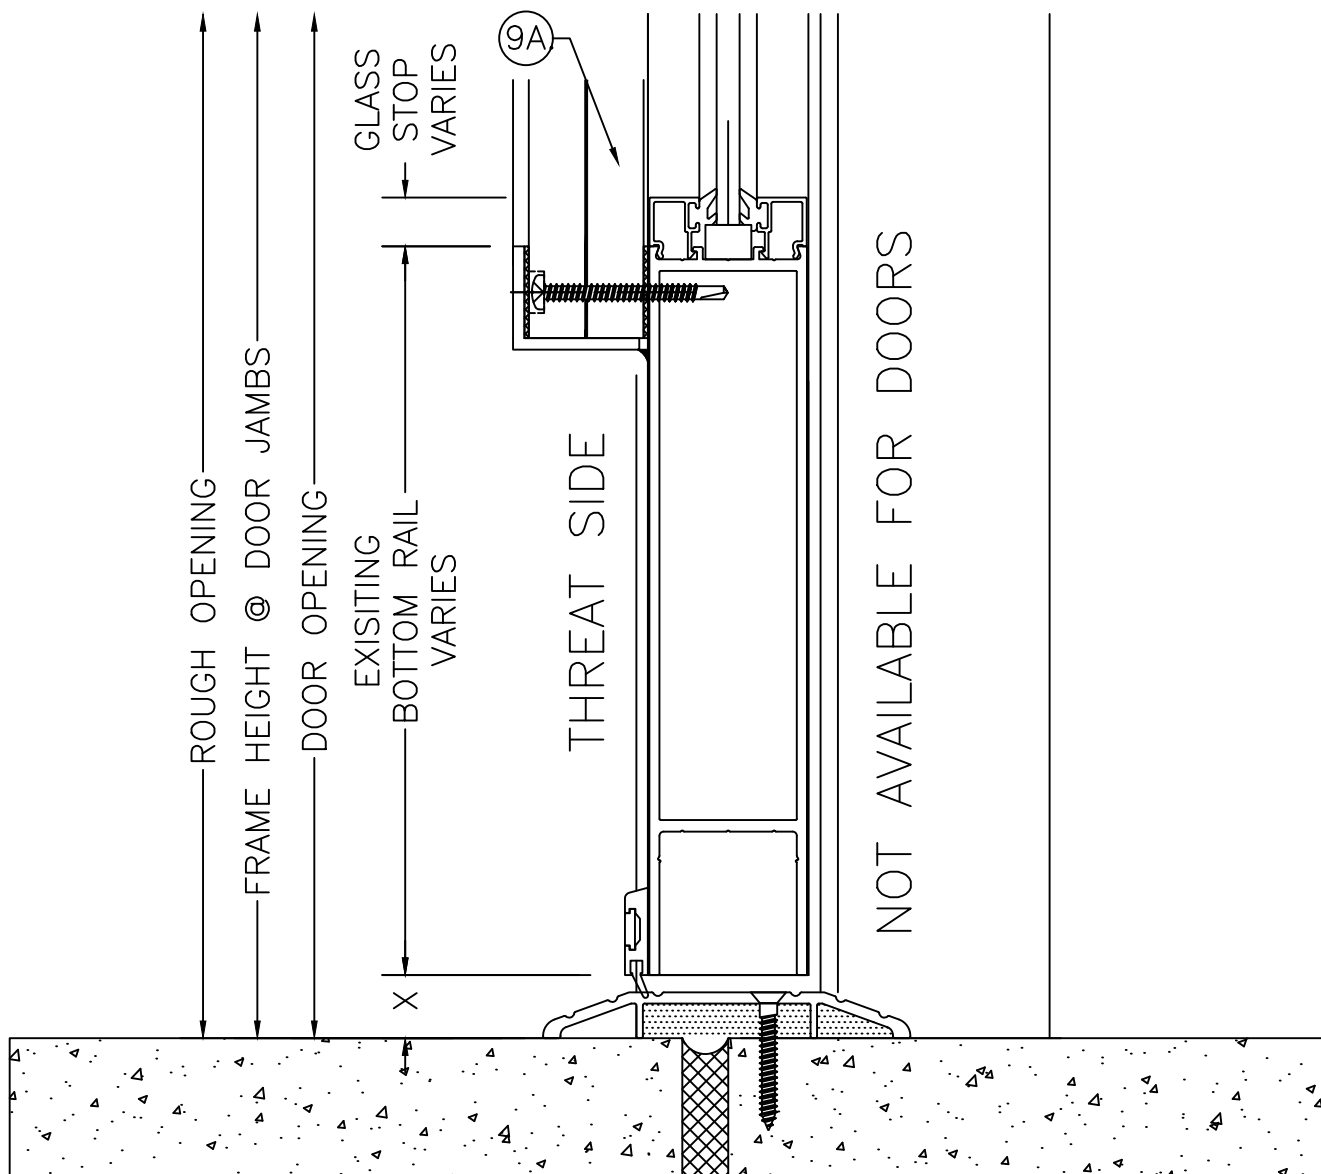

DOOR THRESHOLD

5
D.2

ARCH. DETAIL REF.:
ARCH. SHEET REF.:


DEFENSELITE®
BULLET SHIELD™

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-.1000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

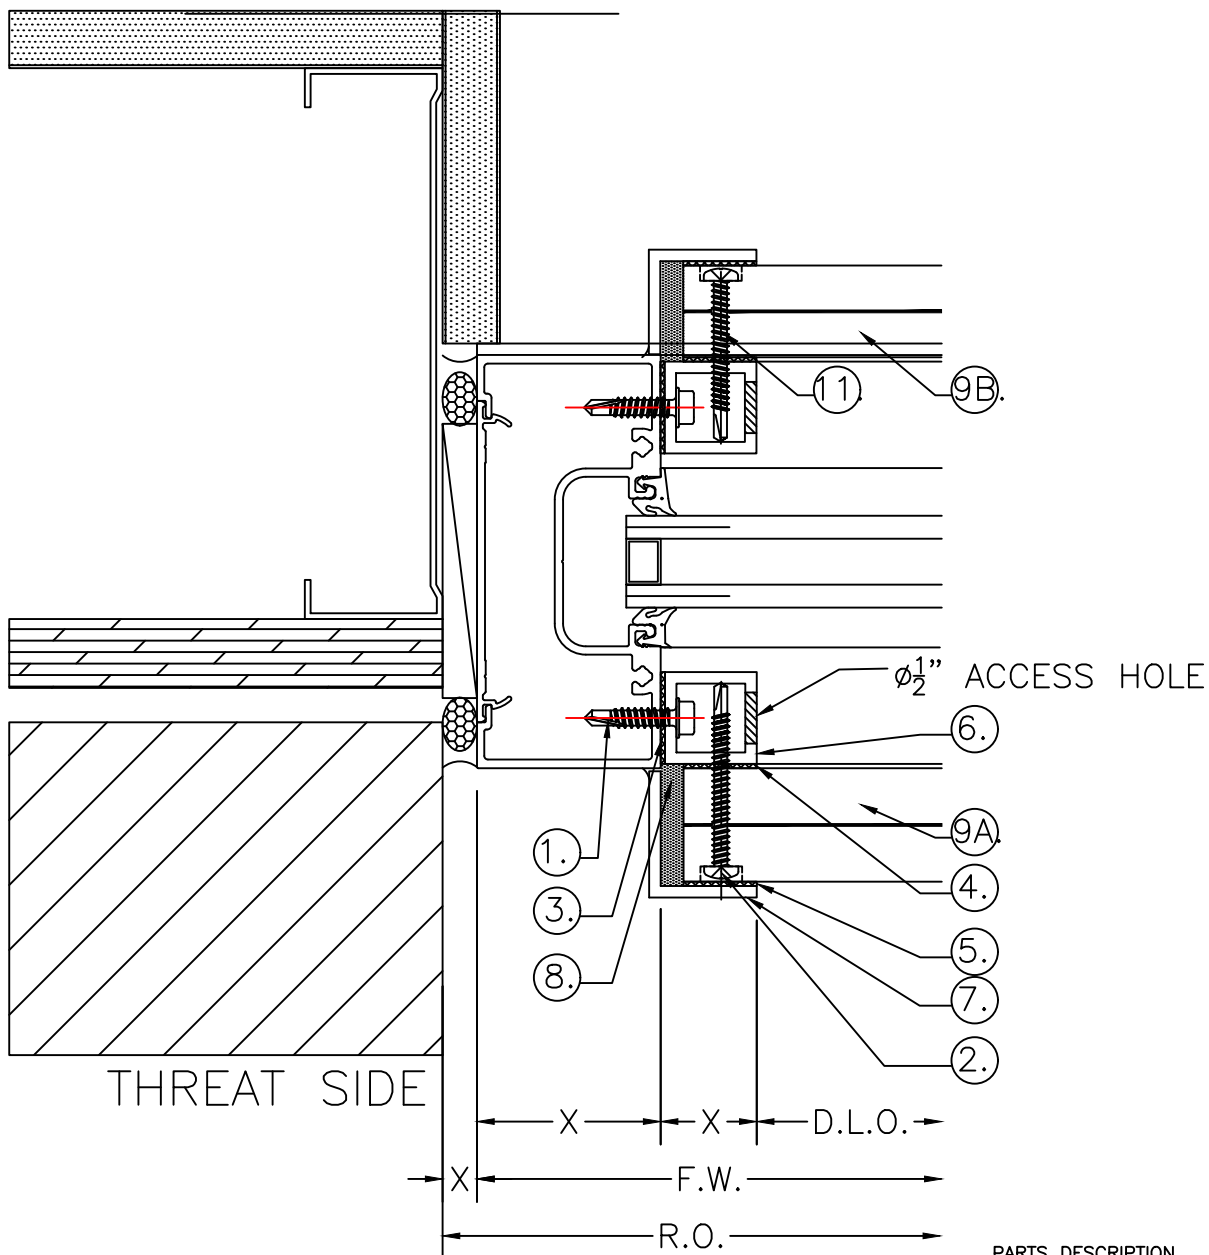

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSHIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSHIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSHIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

6 JAMB
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

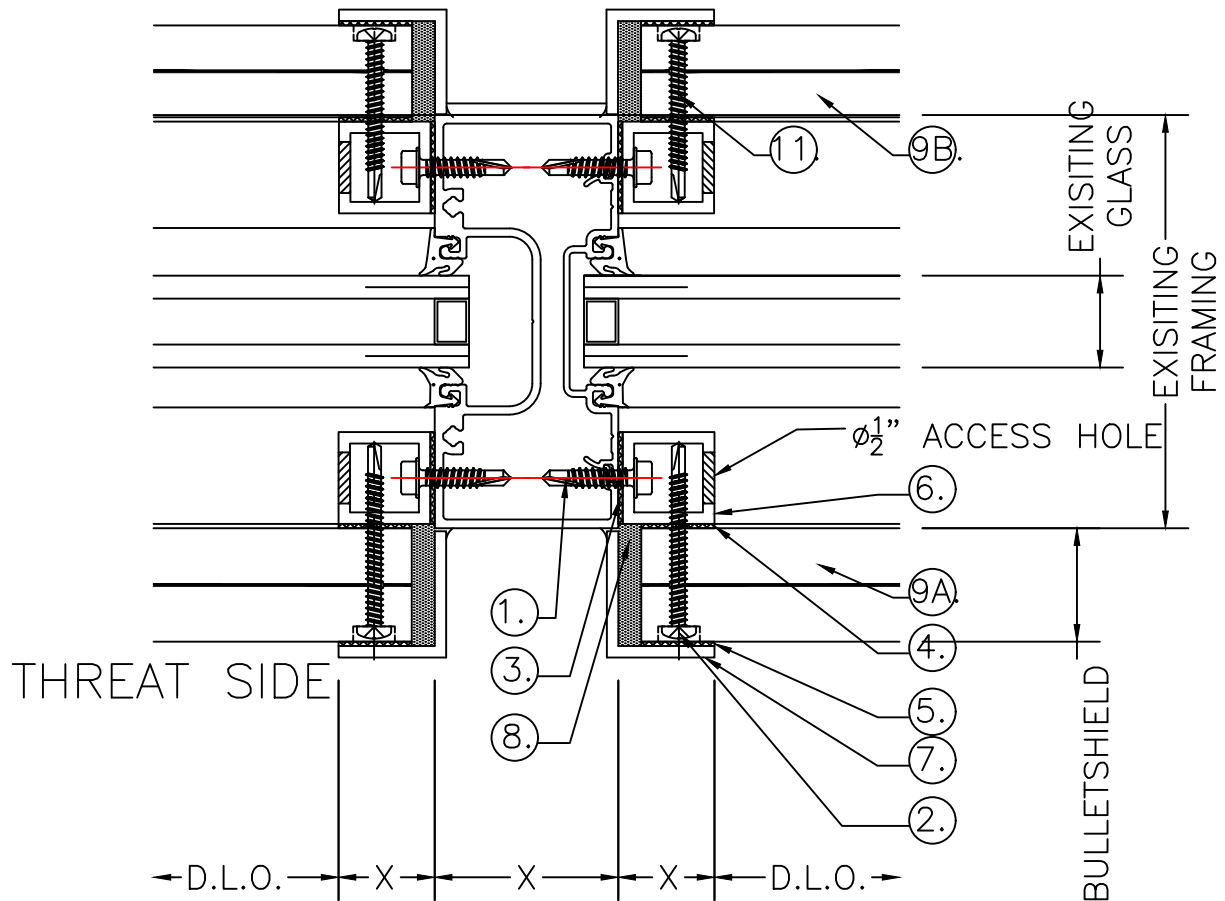

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSHIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSHIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSHIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

7 VERTICAL
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

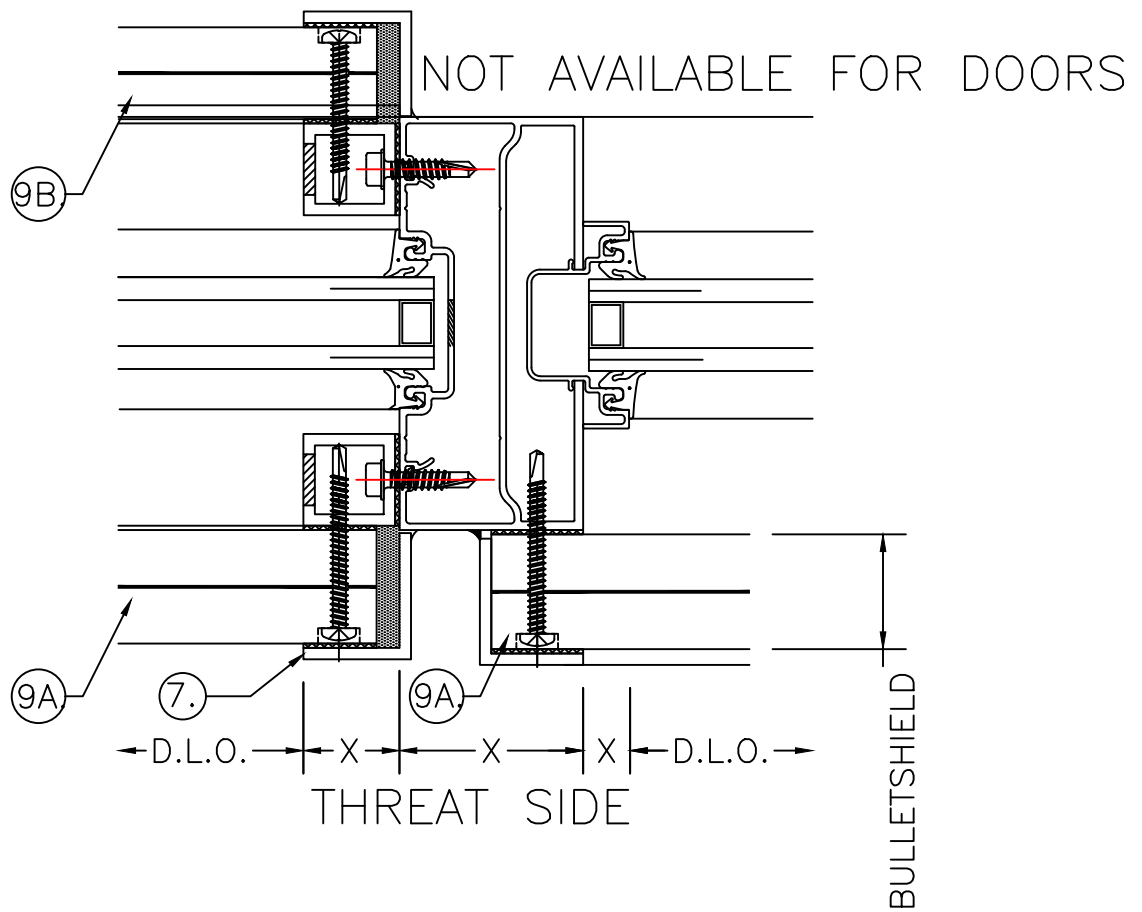

8 TRANSOM
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:




PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSHIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSHIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSHIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

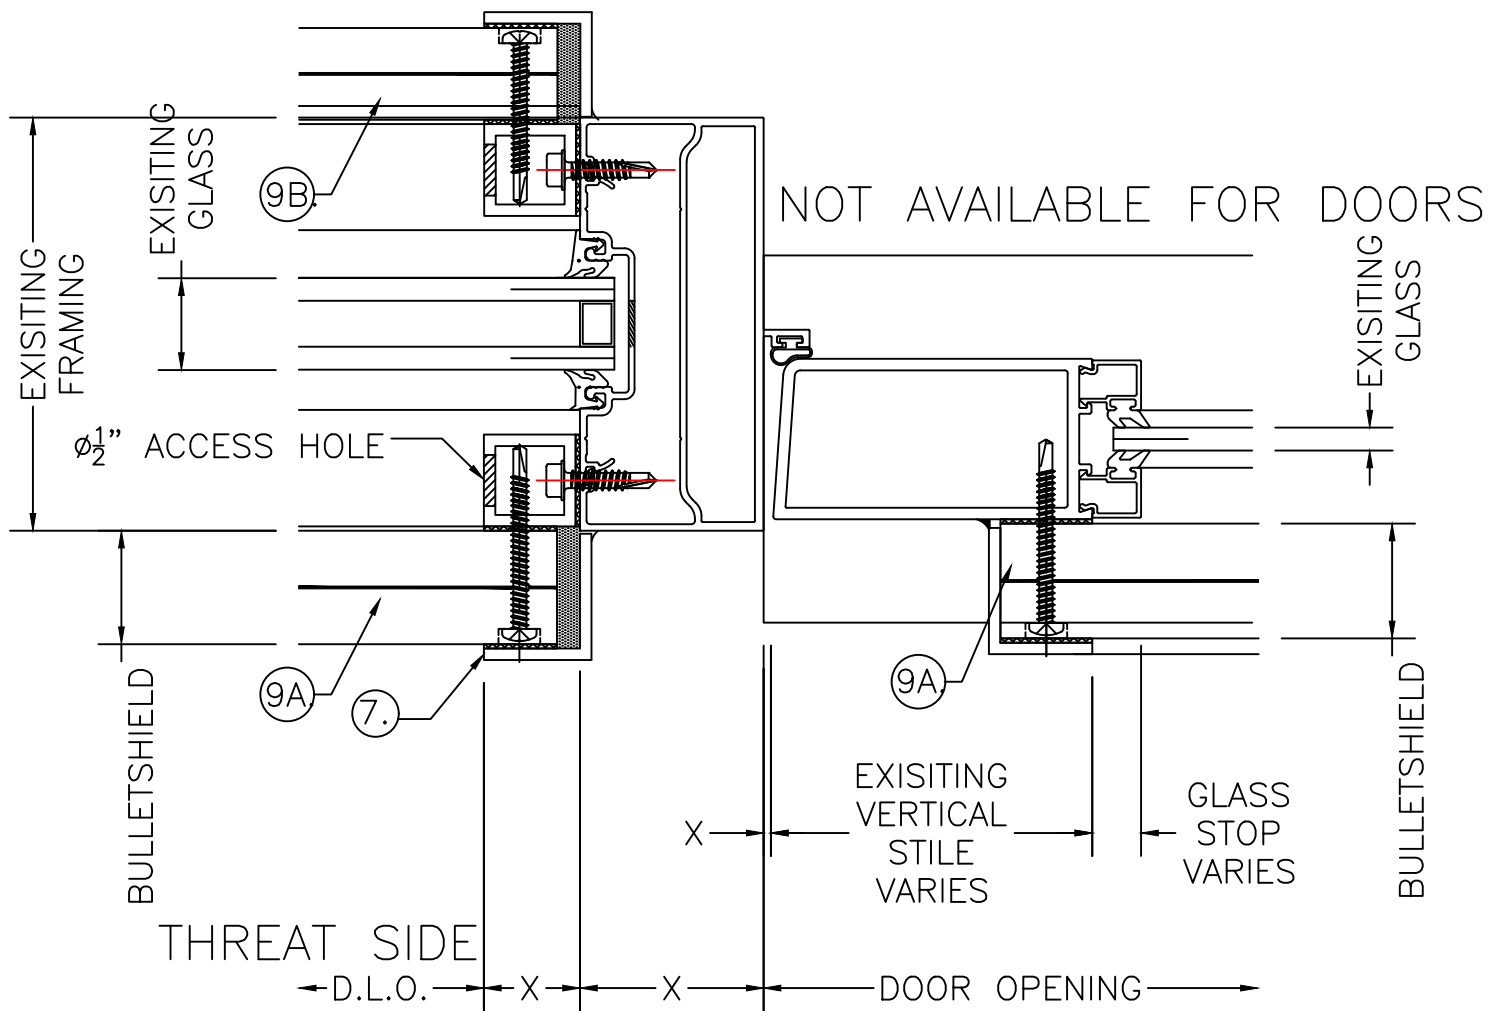

9 DOOR JAMB
D.2 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™


PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

NOT AVAILABLE FOR DOORS

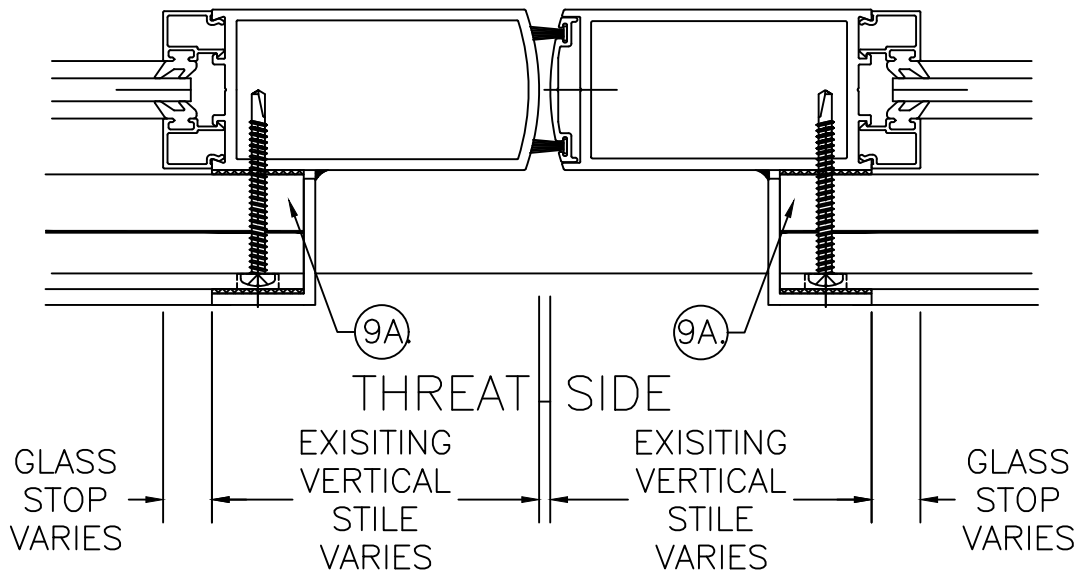

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD




VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

10
D.2

MEETING

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

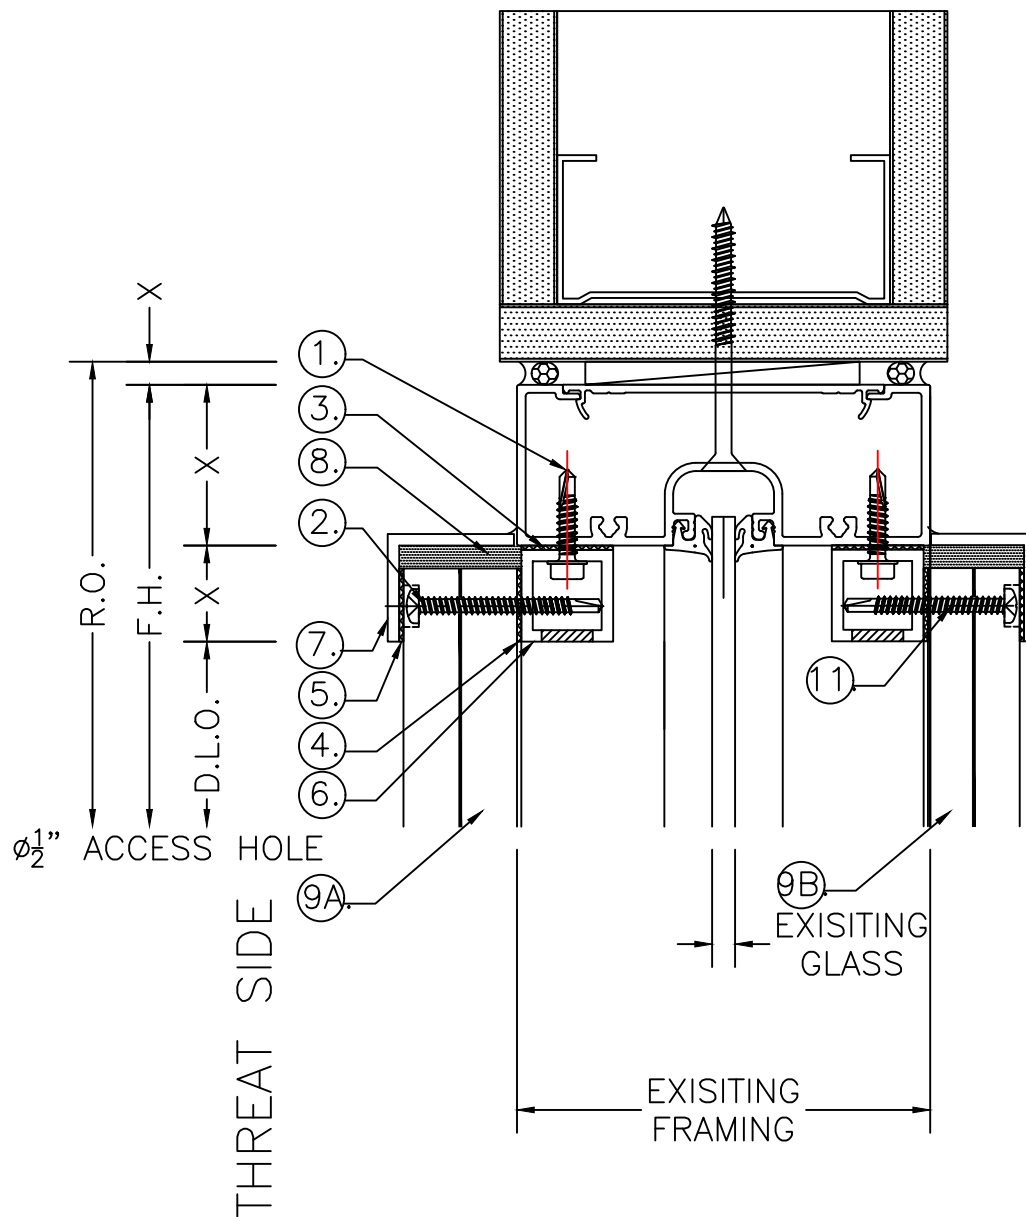

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD





VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

1 HEAD
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

Ø 1/2" ACCESS HOLE

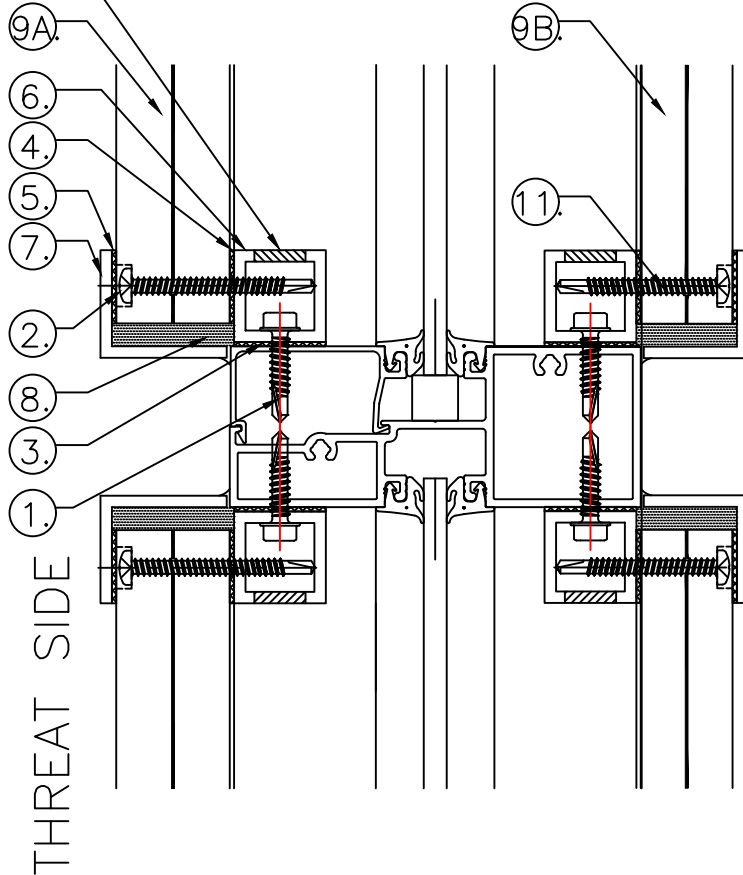

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 1/2" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-.1000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD




VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

2 HORIZONTAL
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

Ø $\frac{1}{2}$ " ACCESS HOLE

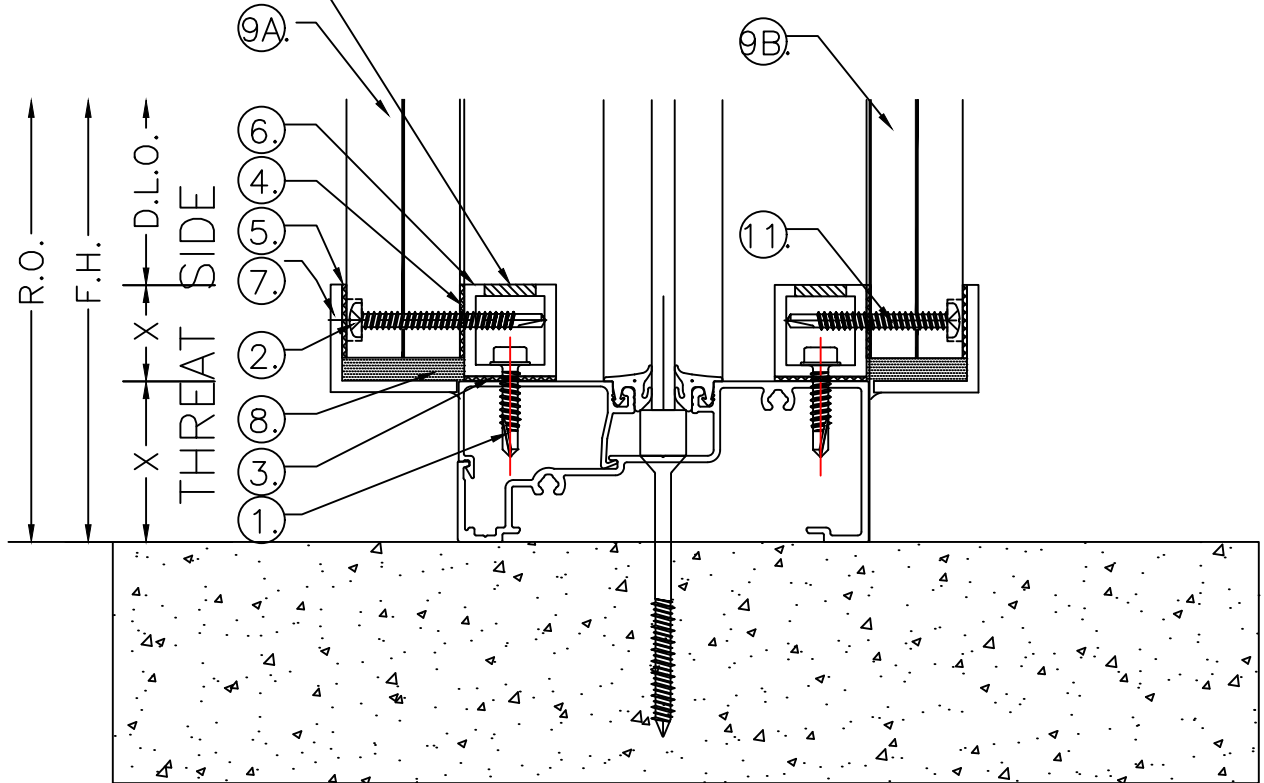

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN MS1250-1.250 BULLETSHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑤ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSHIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSHIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12x1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN BR1000-1.000 BULLETSHIELD




VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

3
D.3

SILL

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

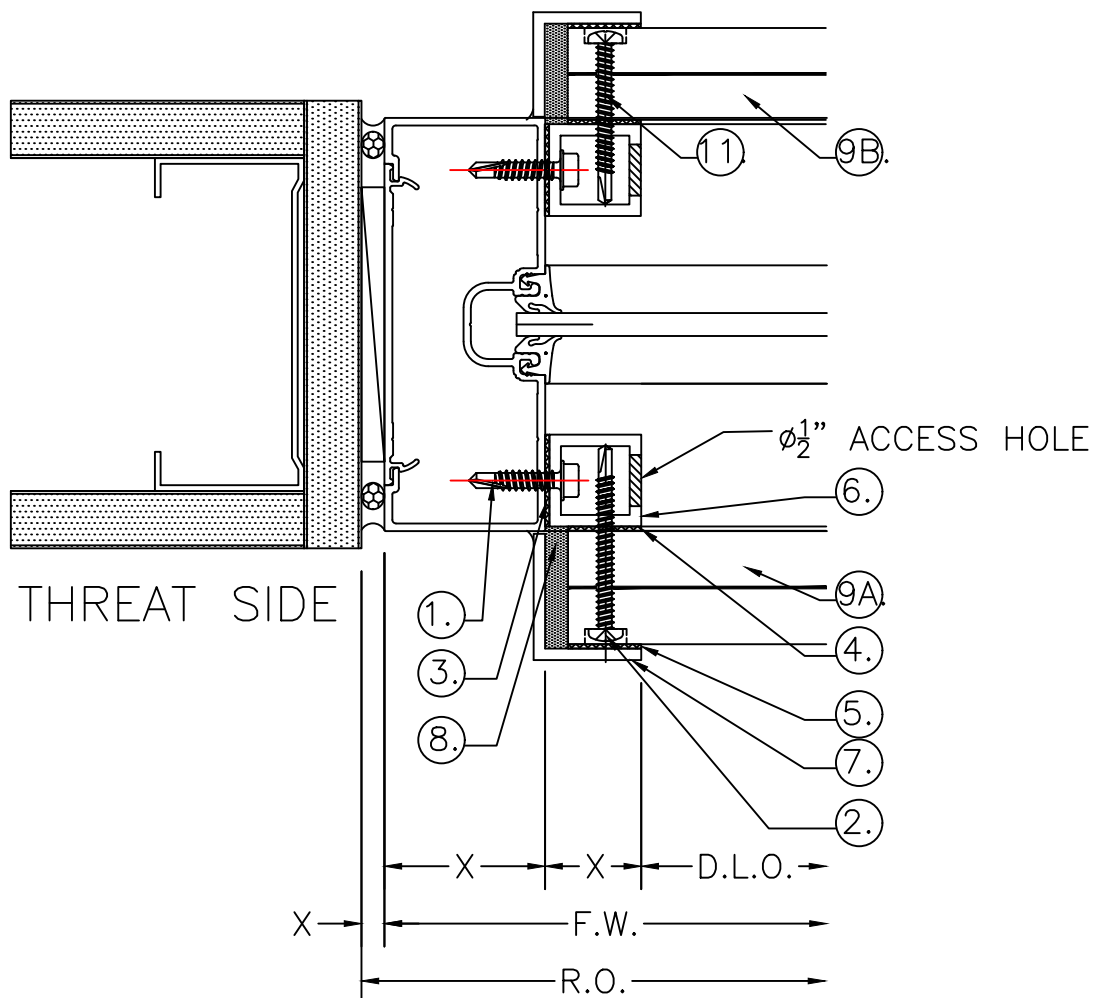

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ $\frac{3}{4}$ " WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES $\frac{1}{4}$ " HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

4 JAMB
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

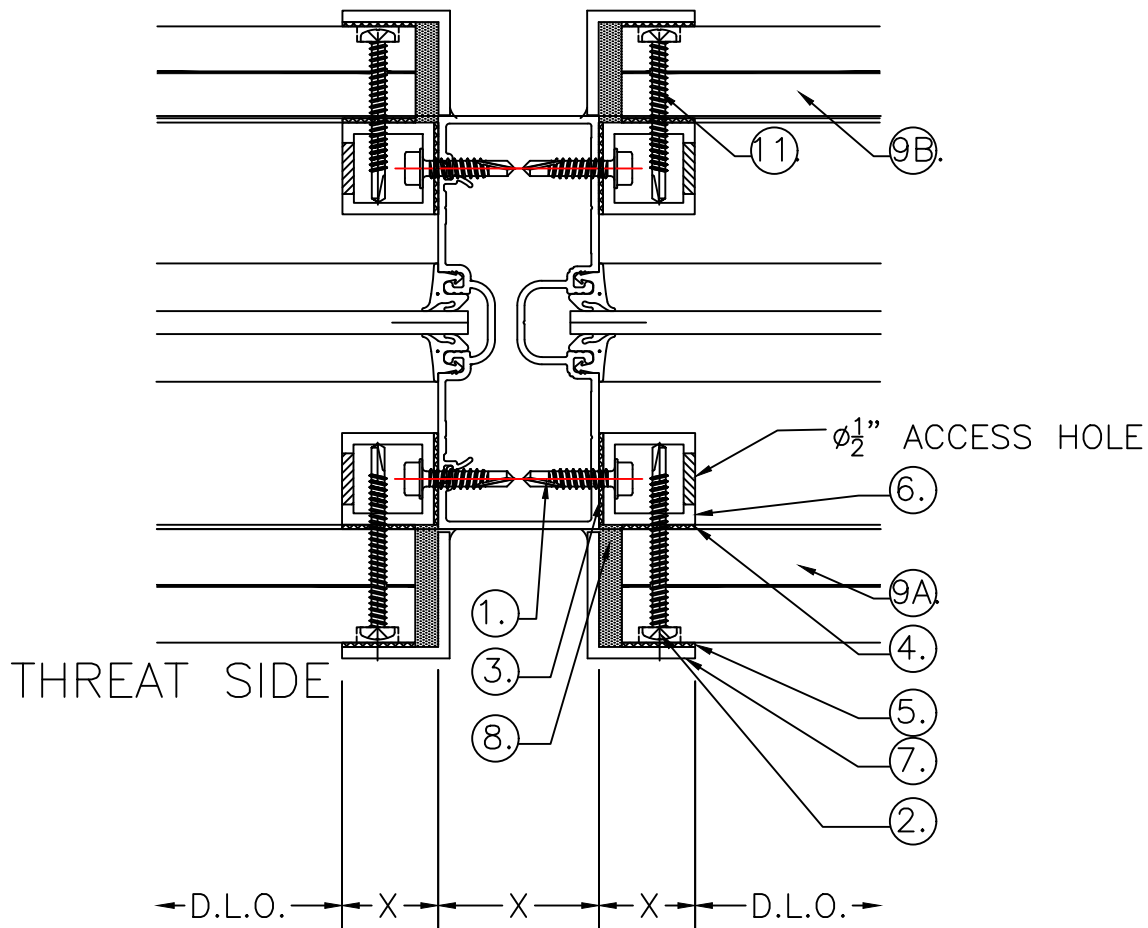

THREAT SIDE

← D.L.O. → X X X D.L.O. →

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 1/2" WIDE HIGH BOND TAPE
NEW 1" ANGLE TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x 2" x .125 (6061) ALUM. ANGLE
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FOR SYMMETRY ON EACH SIDE.
- ⑪ #12X1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

5 VERTICAL
D.3 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

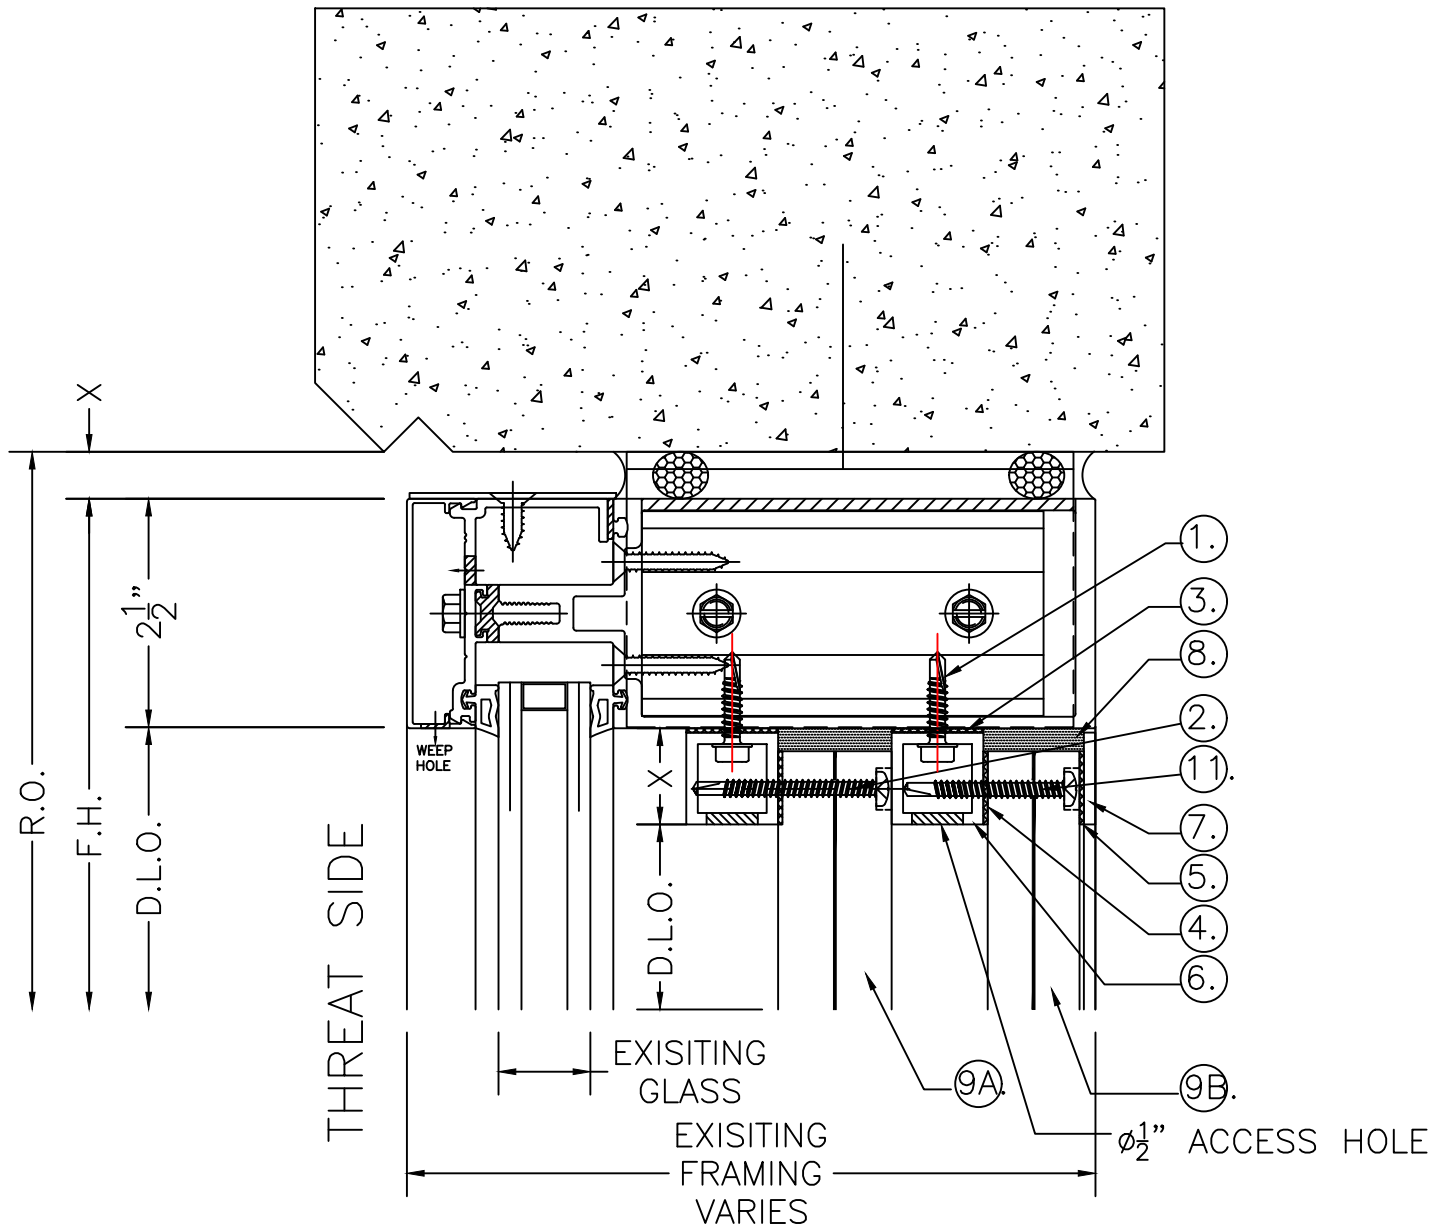

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FR SYMMETRY ON EACH SIDE.
- ⑪ #12x1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS
3" FROM EDGE ON HORIZONTALS
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD




VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

1
D.1

HEAD

ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

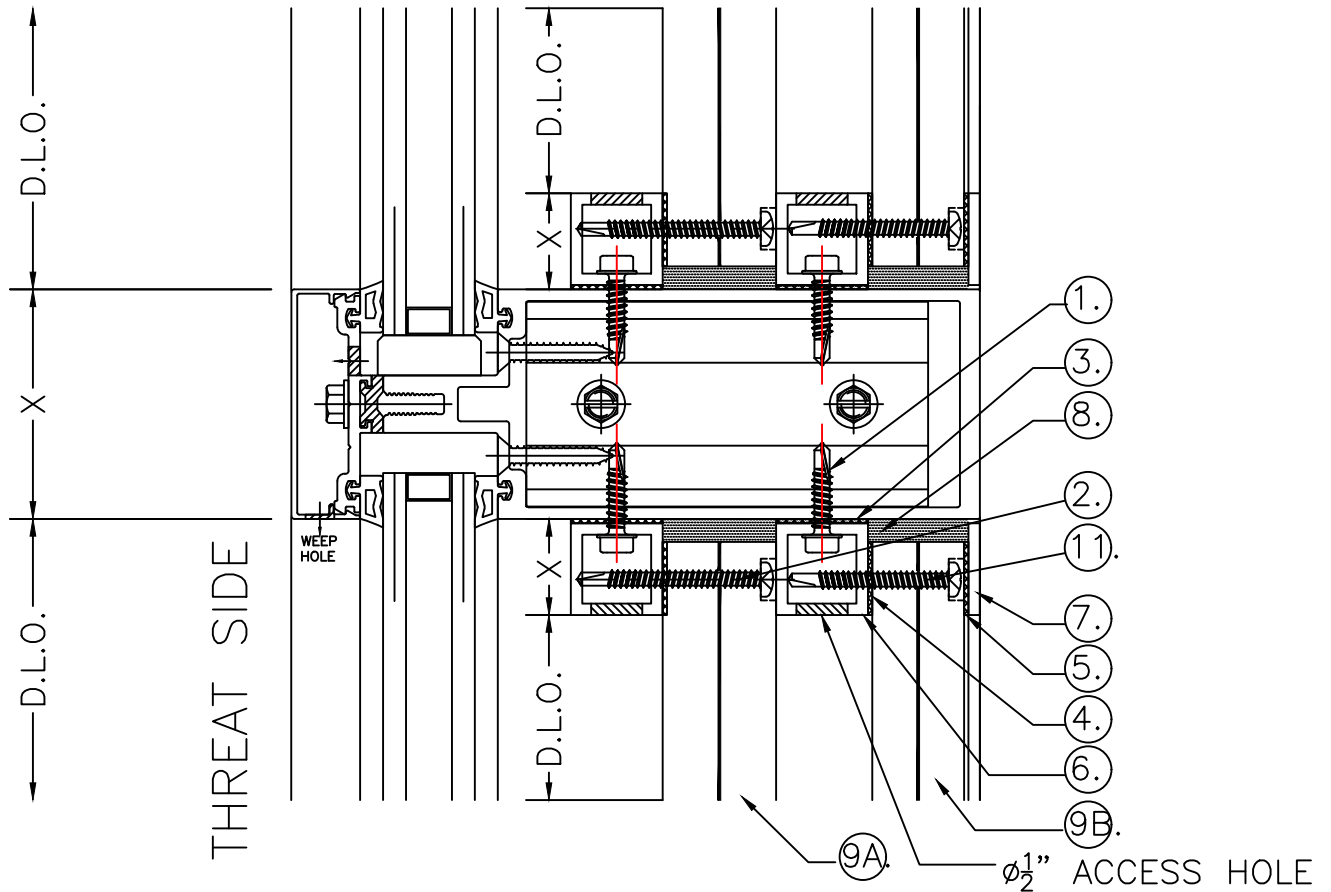

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FR SYMMETRY ON EACH SIDE.
- ⑪ #12x1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS
3" FROM EDGE ON HORIZONTALS
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

2 HORIZONTAL
D.1 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

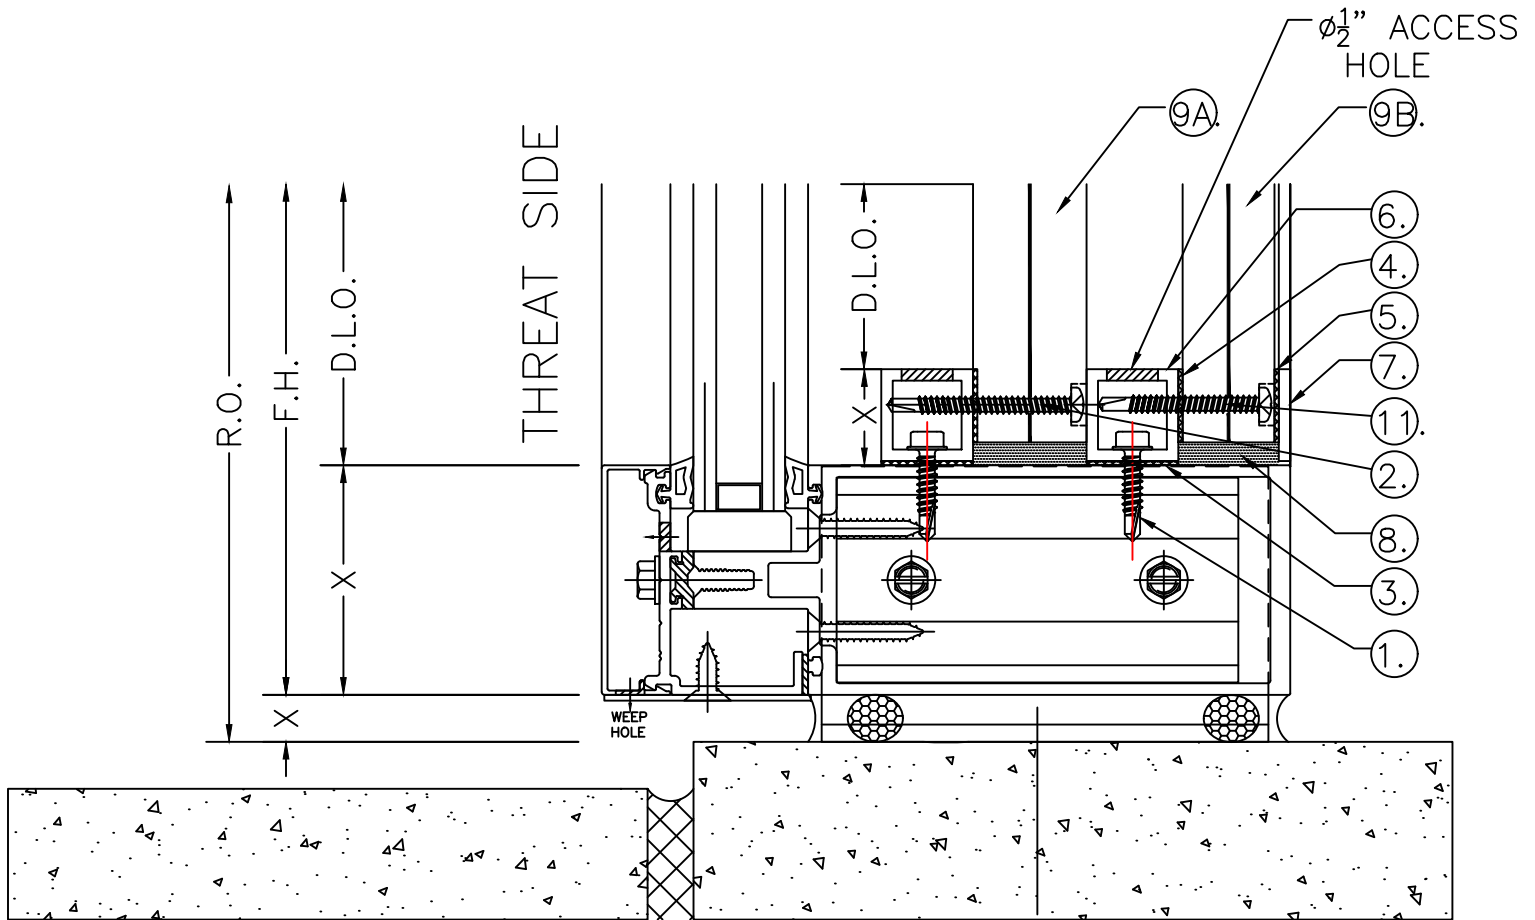

PARTS DESCRIPTION


- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSHIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSHIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW MS1250-1.250 BULLETSHIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- 9A MS1250-1.250 BULLETSHIELD (THREAT SIDE)
- 9B BR1000-1.000 BULLETSHIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FR SYMMETRY ON EACH SIDE.
- ⑪ #12x1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS
3" FROM EDGE ON HORIZONTALS
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSHIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

3
D.1 SILL
ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™

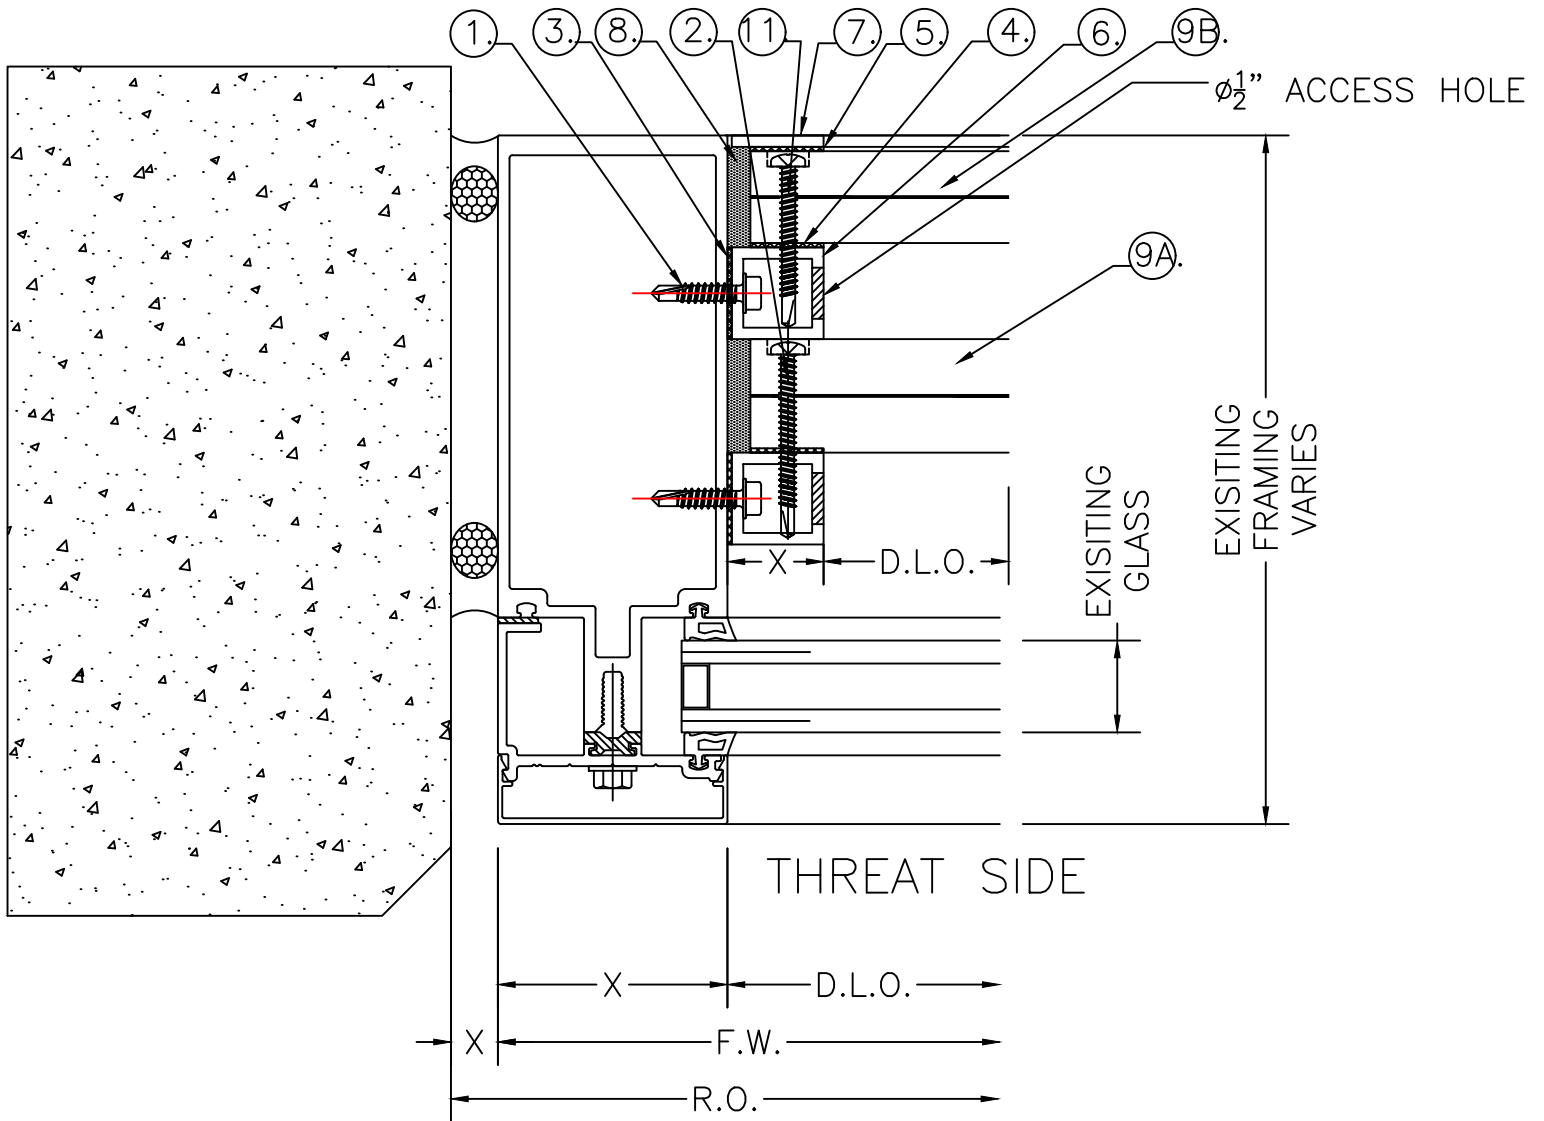

4 JAMB
D.1 ARCH. DETAIL REF.:
ARCH. SHEET REF.:




PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FR SYMMETRY ON EACH SIDE.
- ⑪ #12x1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS
3" FROM EDGE ON HORIZONTALS
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

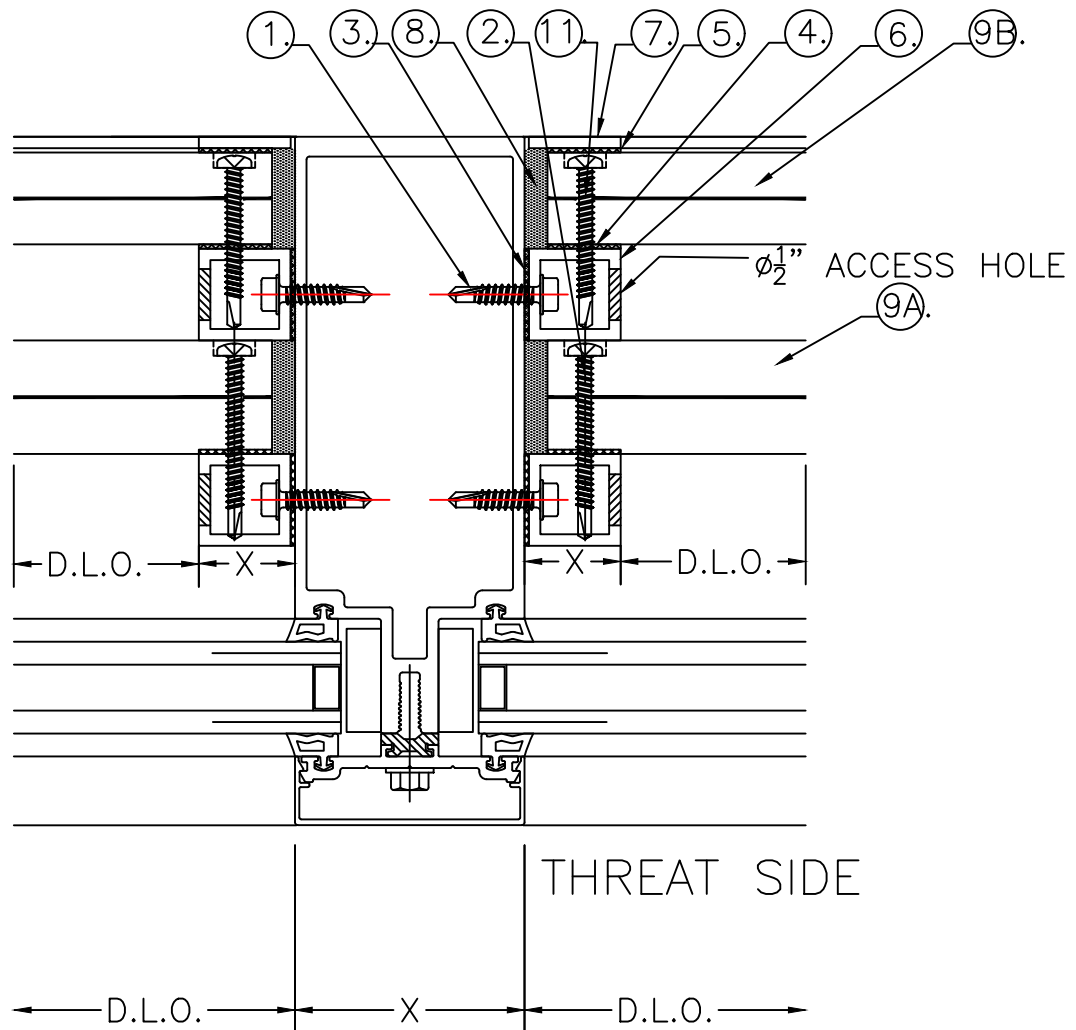

THREAT SIDE

PARTS DESCRIPTION

- ① #12x1" H.H. TEK SCREWS
4" FROM EACH END & 12"-14" O.C.
- ② #12x2" PAN HEAD SDS TT27 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS,
3" FROM EDGE ON HORIZONTALS,
14"-16" O.C. THEREAFTER.
REQUIRES 1/4" HOLE DRILLED IN MS1250-1.250 BULLETSIELD.
- ③ 1" WIDE HIGH BOND TAPE
1" TUBE TO EXISTING FRAMING.
- ④ 3/4" WIDE HIGH BOND TAPE
1" TUBE TO NEW MS1250-1.250 BULLETSIELD.
- ⑤ 3/4" WIDE HIGH BOND TAPE
NEW 1" FLAT BAR TO NEW MS1250-1.250 BULLETSIELD.
- ⑥ 1" x 1" x .125 (6063) ALUM. TUBE
- ⑦ 1" x .125 (6061) FLAT ALUM. BAR
- ⑧ DOW 995 PERIMETER SEALANT
- ⑨A MS1250-1.250 BULLETSIELD (THREAT SIDE)
⑨B BR1000-1.000 BULLETSIELD (NON-THREAT SIDE)
- ⑩ VENT CAP - P/N FV1 (BLACK), (GREY), OR (WHITE).
6" FROM EACH END & 24" O.C.
STAGGERED FR SYMMETRY ON EACH SIDE.
- ⑪ #12x1-3/4" PAN HEAD SDS TT25 COUNTERBORE HEAD,
1" FROM EDGE ON VERTICALS
3" FROM EDGE ON HORIZONTALS
14"-16" O.C. THEREAFTER,
REQUIRES 1/4" HOLE DRILLED IN BR1000-1.000 BULLETSIELD



VENT CAP INSTALLED AFTER ALL
FRAME FASTENING AND
VENTILATION WORK IS COMPLETED.

5 VERTICAL
D.1 ARCH. DETAIL REF.:
ARCH. SHEET REF.:

DEFENSELITE®
BULLET SHIELD™