



**"SS3-03-2" GABLE FILLER**

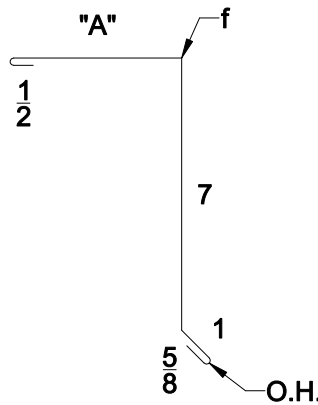

**"SS3-03-3" GABLE TRIM**



**"SS3-03-4" CLEAT**

**ERECTOR NOTES:**

1. THIS DETAIL IS TO BE USED ON PANEL LENGTHS OF 50'-0" OR GREATER.
2. IF "FSS-316" ROOF PANEL DOES NOT END ON A HIGH RIB THEN THE PANEL MUST BE FIELD SLIT ALLOWING FOR 2 3/4" TO BE BENT INTO A VERTICAL LEG AND USED IN CONJUNCTION WITH THE "SS3-03-1" GABLE FILLER, SEALER TAPE, & POP RIVETS.
3. START GABLE TRIM @ EAVE & PROCEED UPWARDS CAULKING AND LAPPING EACH 4" MIN.
4. "A" DIMENSION VARIES DUE TO CONSTRUCTION VARIATIONS.
5. STAGGER END JOINTS OF GABLE TRIM & CLEAT A MINIMUM OF 1'-0".

**FLEXOSPAN**

BOX 515 RAILROAD STREET  
SANDY LAKE, PENNSYLVANIA 16145-0515  
PHONE: 800-245-0396 ° FAX: 724-376-3864

"Fss-316" Standing  
Segm Details

Expansion Finish  
Gable Detail

DRAWN BY: RW

DATE: 8/31/00

DRAWING NO.

CHECKED BY: CANON

DATE:

FSS316-14