
## OMEGA 20 - DOUBLE SWING GATE

| Door post dimensions |          |                          |
|----------------------|----------|--------------------------|
| Panel                | Opening  | Post                     |
| 47"                  | 3' à 8'  | 3" x 3" 11GA             |
| 78"                  | 3' à 8'  | 3" x 3" 11GA             |
| 47" & 78"            | 9' à 16' | 4" x 4" 11GA             |
| 99"                  | 3' à 8'  | 4" x 4" 11GA             |
| 99"                  | 9' à 16' | 6" x 6" $\frac{3}{16}$ " |



THE DEPTH OF THE CONCRETE FOUNDATIONS MUST BE ESTABLISHED ACCORDING TO REGULATIONS IN THE REGION WHERE THE INSTALLATION IS CARRIED OUT. A MINIMUM DEPTH OF 1070 MM (42 IN.) IS RECOMMENDED. THE RECOMMENDED FOUNDATION DIAMETER IS 200mm (8 IN.) FOR A COMMERCIAL SITE AND 152 MM (6 IN.) FOR RESIDENTIAL INSTALLATION. REGULATIONS OF THE REGION TAKES PRECEDENCE OVER THE SPECIFICATIONS MENTIONED ABOVE.



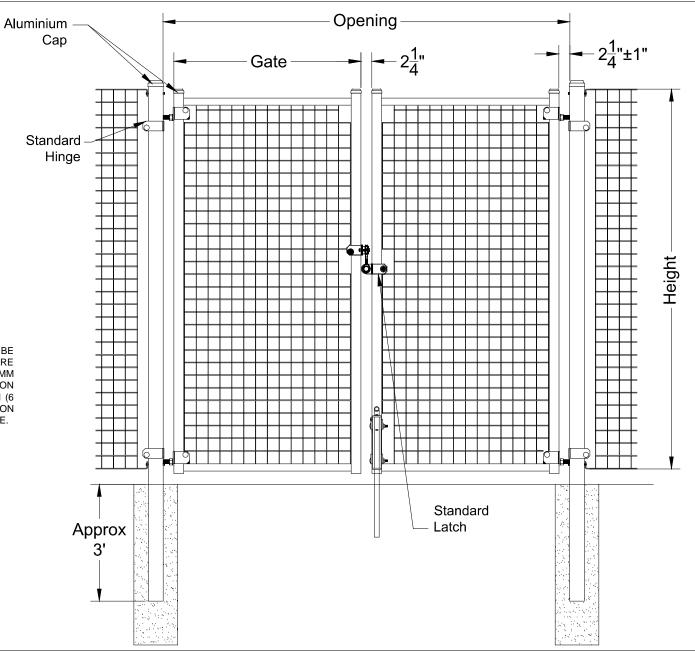

Omega II Fence Systems 1735 boul. St-Elzéar Ouest Laval, Quebec H7L 3N6 Tel: 450-686-9600 1-800-836-6342 Fax: 450-681-5318

www.omegatwo.com